

Contractor: Luttrell & Sons, LLC


TECH: Jared - F

Plant: 100




Slack: 0"


Structure Total: 59404 lb

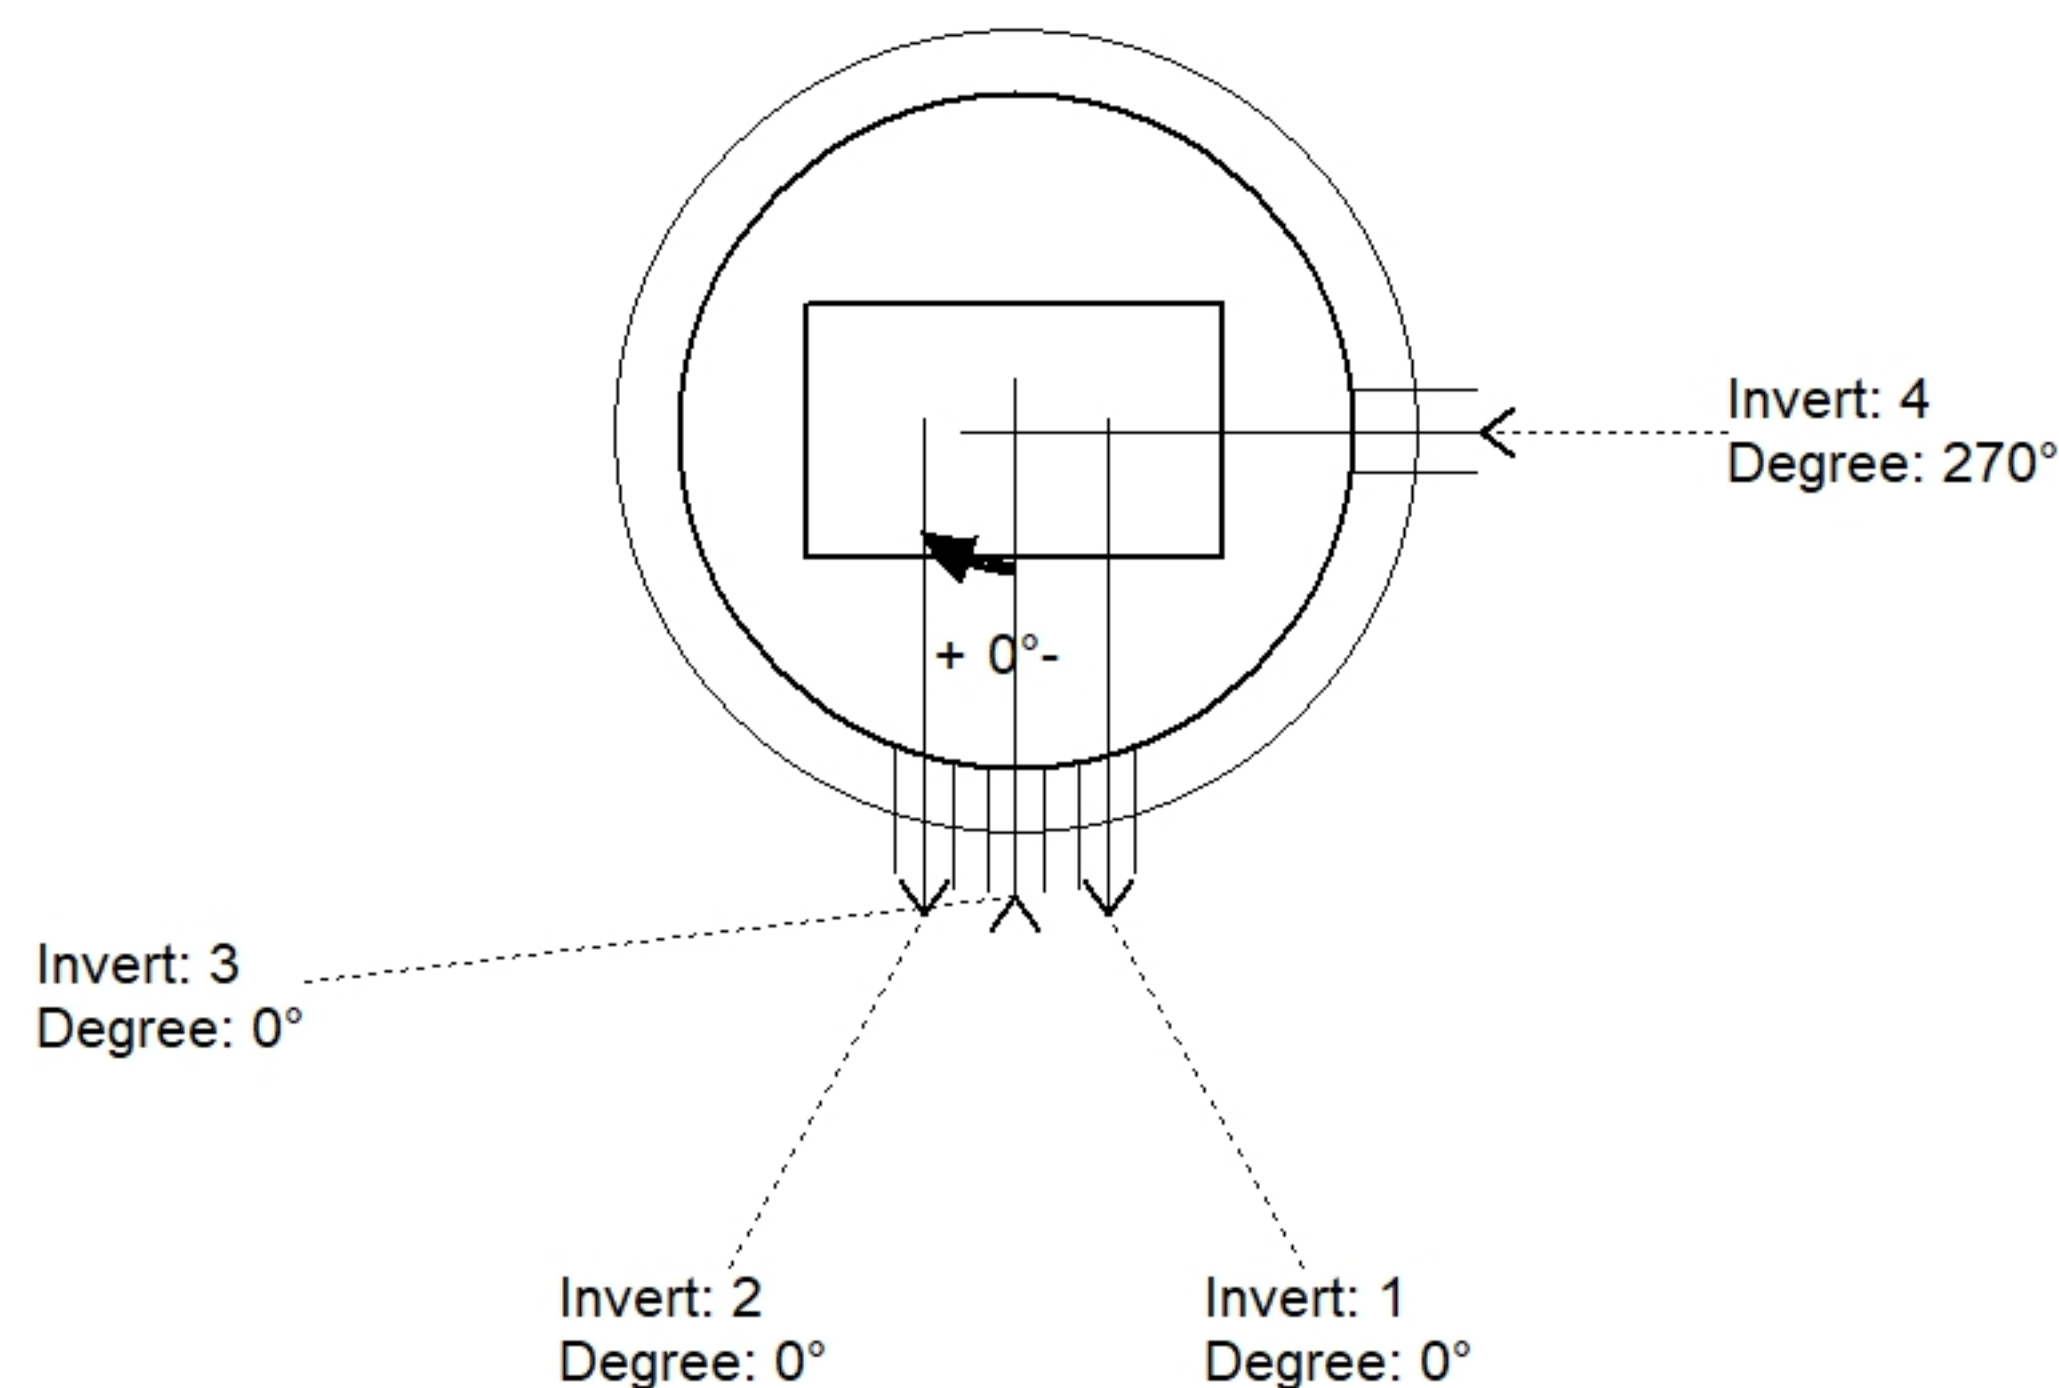

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	496.5'							
Reducer								
Invert 1	493.38'	0°	4" PVC SDR35	4.25"	8"	PSX 8QRS-S NYLO	57.56"	P2
Invert 2	493.38'	0°	4" PVC SDR35	4.25"	8"	PSX 8QRS-S NYLO	57.56"	P2
Invert 3	490.5'	0°	3" PVC SDR35	3.25"	8"	PSX 8QRS-S NYLO	22.5"	P2
Invert 4	489'	270°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	5"	P2
Invert 5								
Invert 6								
Invert 7								
Invert 8								

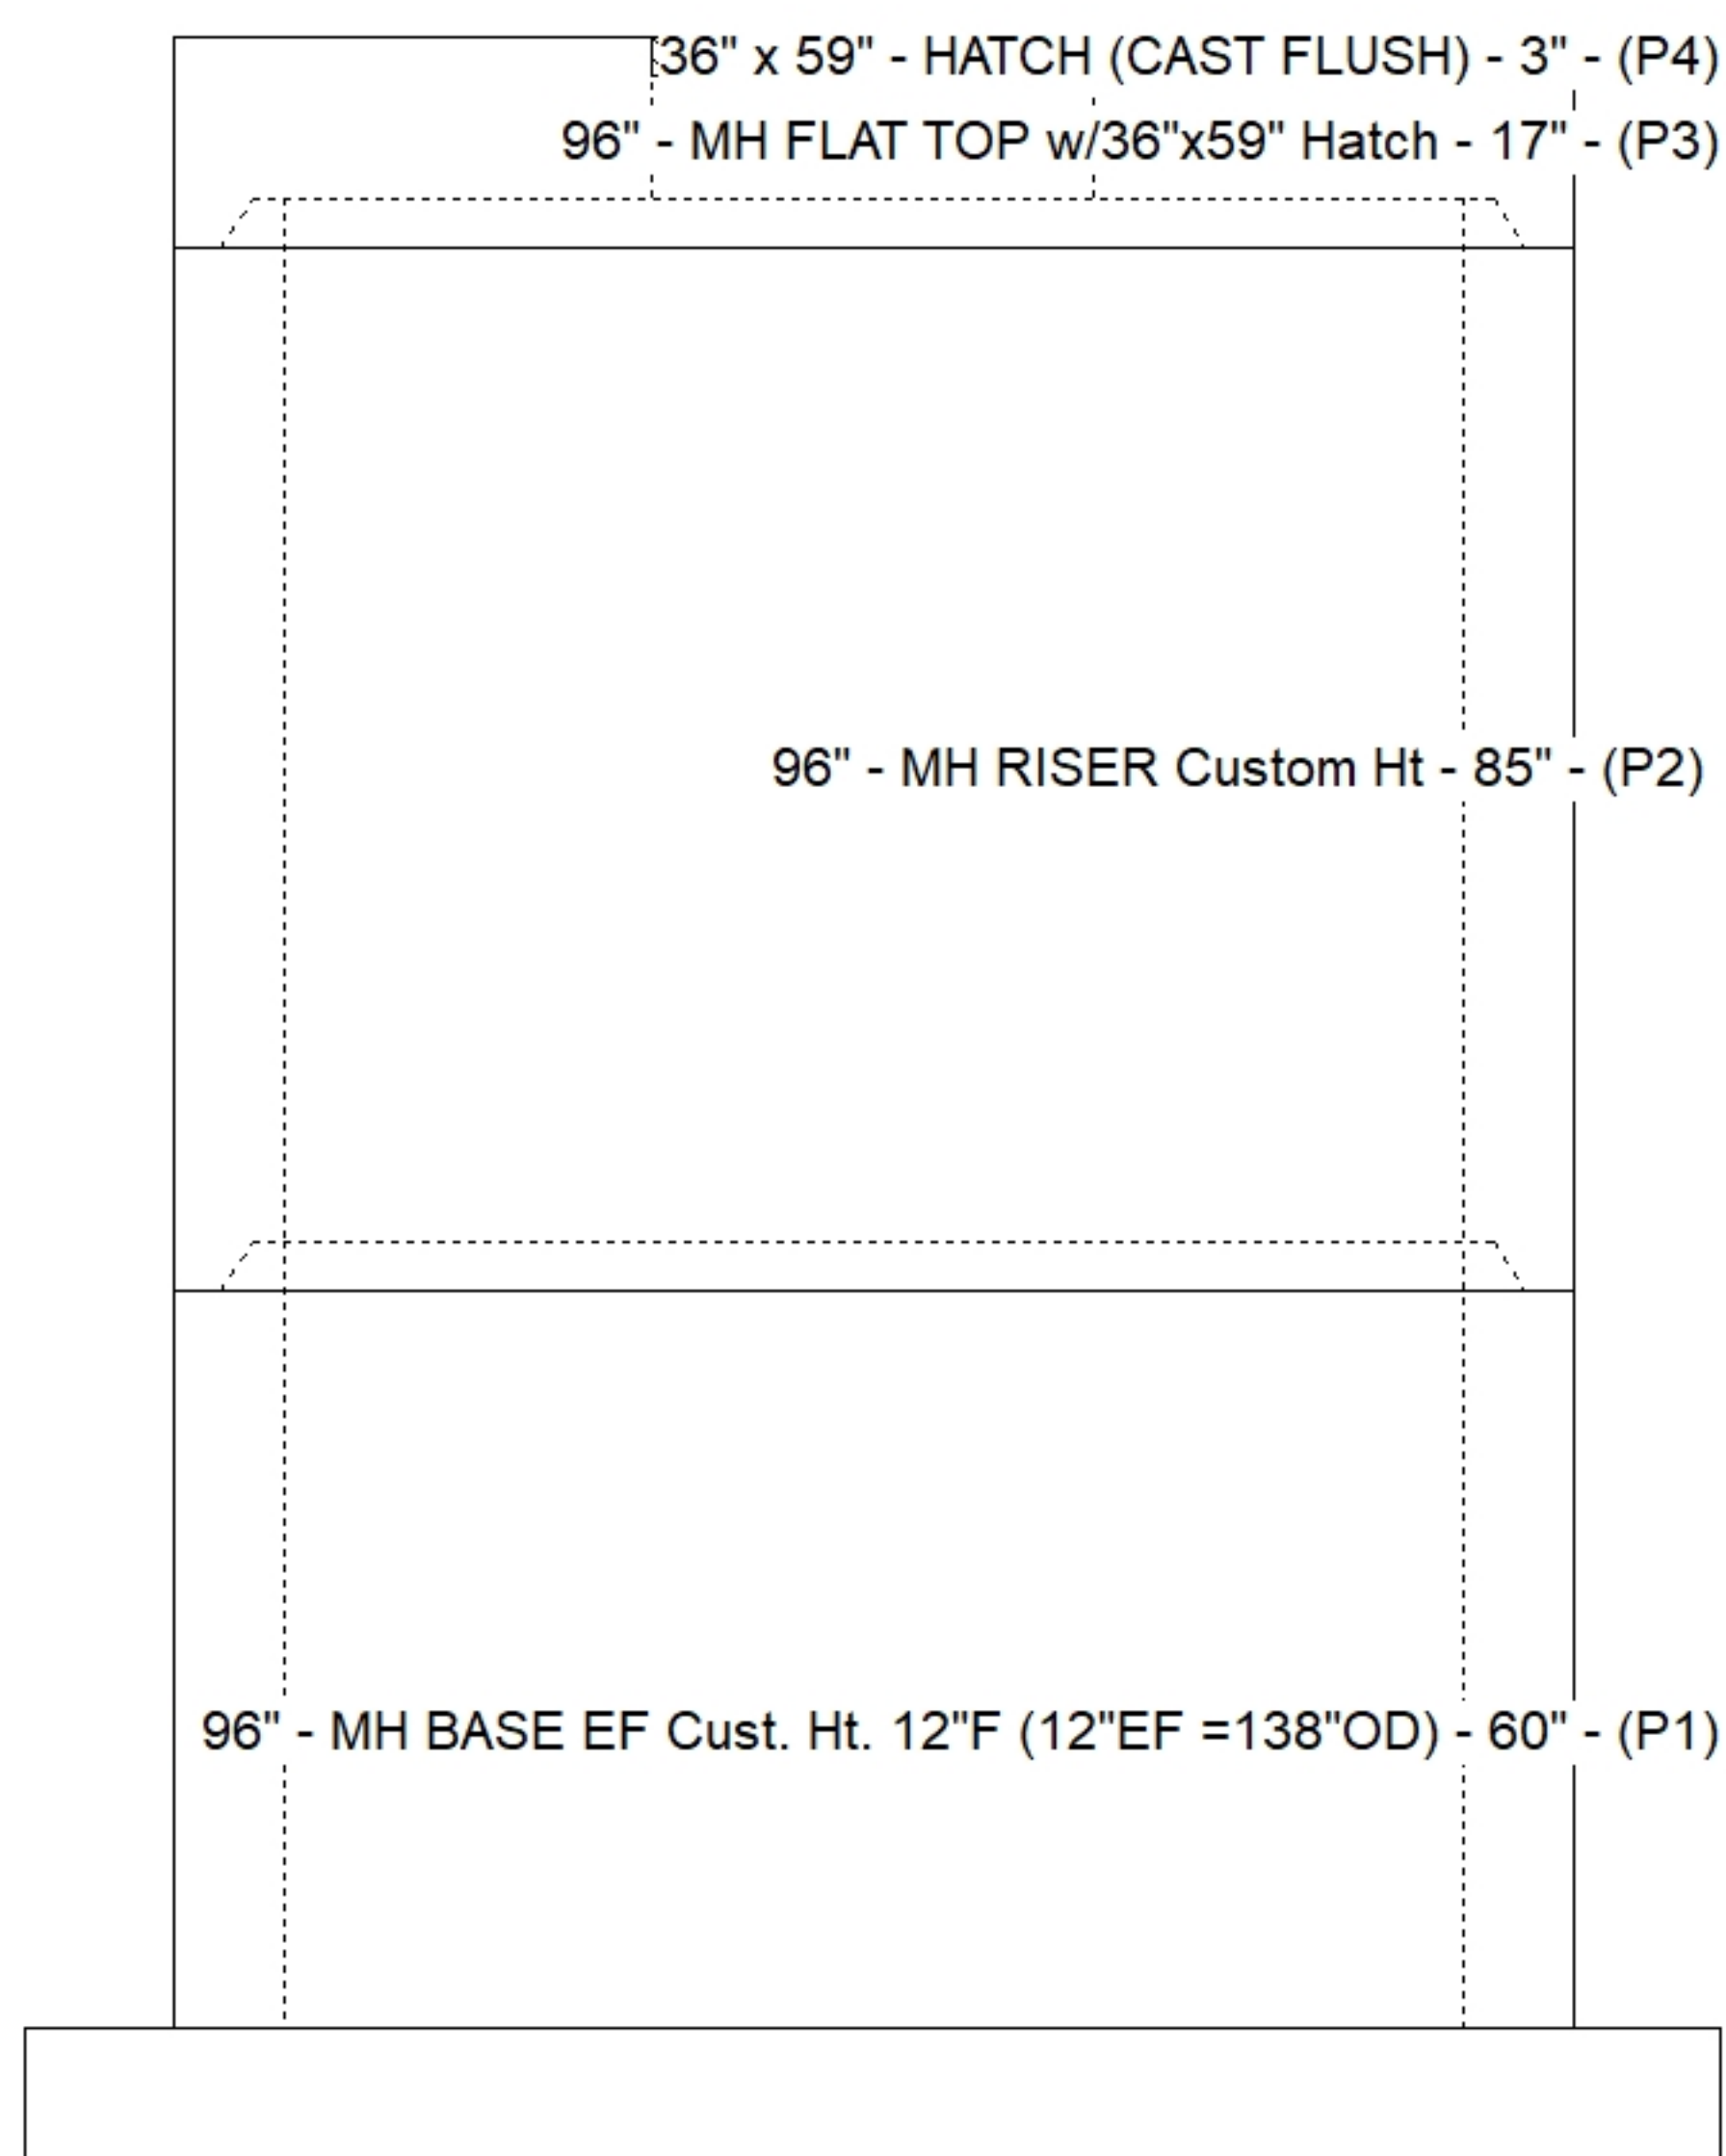

Default - Interior Dimensions

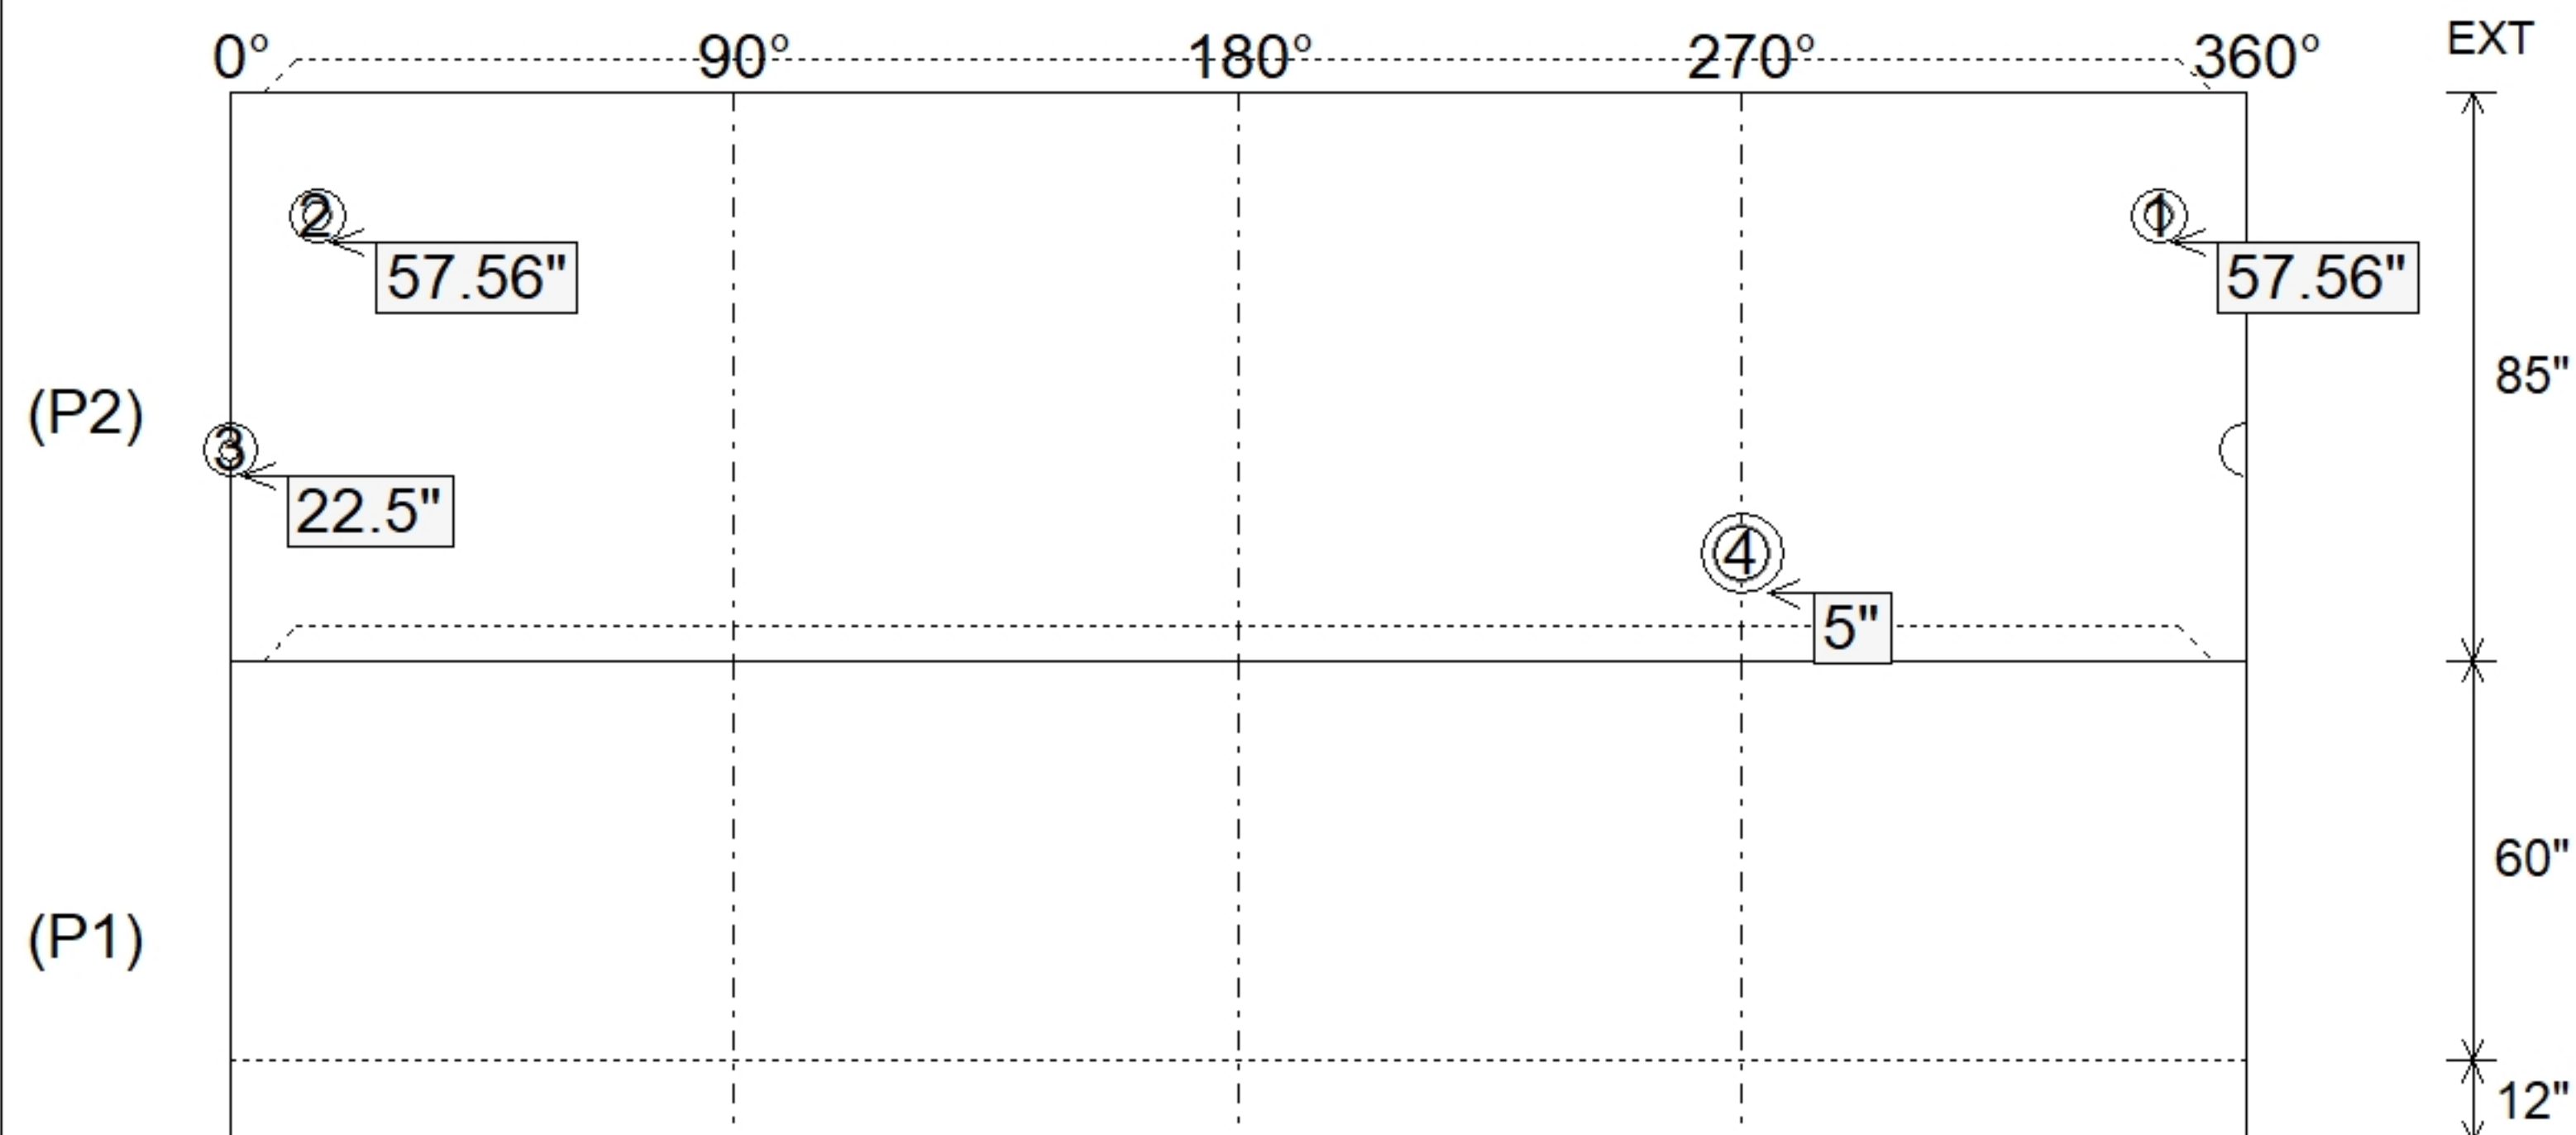

Submittal Drawing
8/10/2026 9:52:47 AM

SUBMITTAL
APPROVED BY: