



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 8/26/2026 3:45:49 PM		Tech: Jared - F PC: E. Bradley			
Structure ID: S6 SS-MHD										
P1 MH048BAVF		MH BASE Custom Ht T/n								
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE NO STEP F/G - 24" P2) 48" - MH RISER T/G - 36" P1) 48" - MH BASE Custom Ht T/n - 40" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-375 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0285 1) A-Lok - 0140					0 lb 1550 lb 2515 lb 4053 lb 0 lb 0 lb 1440 lb 271 lb 0 lb 0 lb 2 lb 1 lb ----- Structure Total: 9832 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS. 4. CASTING BY ICAST (HOE MC-375 F/C SANITARY) 5. INTERNAL DROP ASSEMBLY PROVIDED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 936.26' Rim to Invert: 8.96' Slack: 2.52" Sump: 2" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	927.3'	0°	0"	8" PVC SDR35	8.5"	A-Lok 0285	9.75"	9.818"	1.125"	0"
Invert 2	927.4'	90°	45.5"	8" PVC SDR35	8.5"	A-Lok 0285	9.75"	9.818"	2.375"	0"
Invert 3	929.47'	260°	131.625"	4" PVC SDR35	4.25"	A-Lok 0140	5"	5.009"	27.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

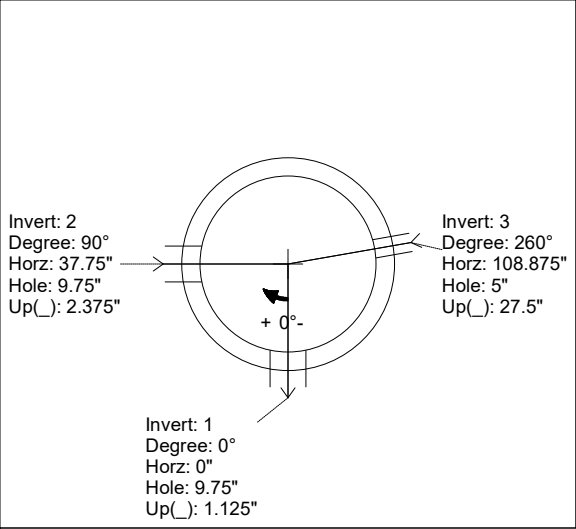

UPSIDE-DOWN VIEW (int. dimensions)

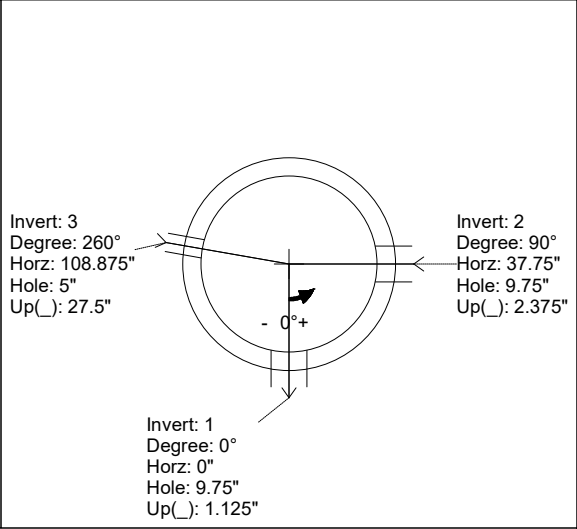

INSIDE WALL DIMENSIONS

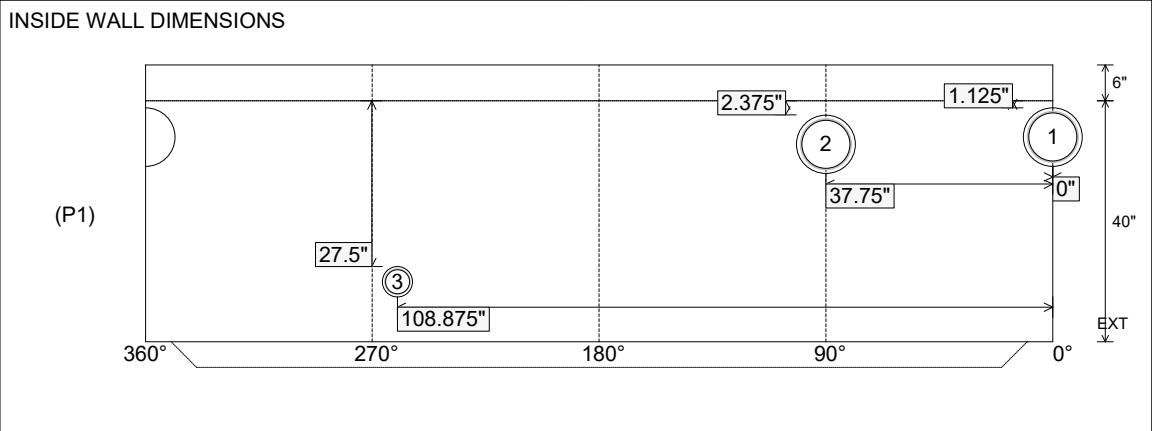

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 40" Height (Ext): 46"	Weight (Net): 4053 lb Volume (Net): 1.03cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-1822 - Project Versailles

Job Location: Versailles, KY

Contractor: KY Earthworks

Plant: 100

8/26/2026 3:45:49 PM

Tech: Jared - F

PC: E. Bradley

Structure ID: S6 SS-MHD

P1 MH048BAVF

MH BASE Custom Ht T/n

P4) 24" - CASTING HEIGHT - 7"

P3) 48" - ECC CONE w/ 24" HOLE NO STEP F/G - 24"

P2) 48" - MH RISER T/G - 36"

P1) 48" - MH BASE Custom Ht T/n - 40"

1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL - FULL HEIGHT

1) CASTING - HOE MC-375 F/C Sanitary

2) 48" - Conseal CS-102 1.00" (Double)

1) 24" - Conseal CS-102 1.00" (Double)

2) A-Lok - 0285

1) A-Lok - 0140

0 lb

1550 lb

2515 lb

4053 lb

0 lb

0 lb

1440 lb

271 lb

0 lb

0 lb

2 lb

1 lb

Structure Total: 9832 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. NO STEPS.

4. CASTING BY ICAST (HOE MC-375 F/C SANITARY)

5. INTERNAL DROP ASSEMBLY PROVIDED BY OTHERS.

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)

- RISER/WALLS (As .12)

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 936.26'

Rim to Invert: 8.96'

Slack: 2.52"

Sump: 2"

Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	927.3'	0°	0"	8" PVC SDR35	8.5"	A-Lok 0285	9.75"	9.818"	1.125"	0"
Invert 2	927.4'	90°	45.5"	8" PVC SDR35	8.5"	A-Lok 0285	9.75"	9.818"	2.375"	0"
Invert 3	929.47'	260°	131.625"	4" PVC SDR35	4.25"	A-Lok 0140	5"	5.009"	27.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

FOR INVERT ONLY

UPSIDE-DOWN VIEW (int. dimensions)

INSIDE WALL DIMENSIONS

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 5"

Floor Height: 6"

Height (Int): 40"

Height (Ext): 46"

Weight (Net): 4053 lb

Volume (Net): 1.03cu.yd