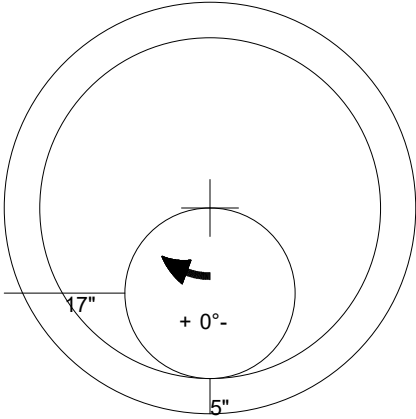
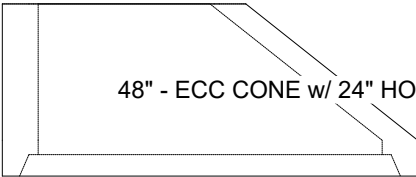


Job Name: 26-1822 - Project Versailles		Plant: 100	Tech: Jared - F	
Job Location: Versailles, KY Contractor: KY Earthworks		8/26/2026 3:50:00 PM	PC: E. Bradley	
Structure ID: T3 SS-MH				
P3 MH048CN24-S		ECC CONE w/ 24" HOLE NO STEP F/G		
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE NO STEP F/G - 24" P2) 48" - MH RISER NO STEPS T/G - 60" P1) 48" - MH BASE NO STEP T/h - 30" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-375 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0350		0 lb 1550 lb 4192 lb 3334 lb 0 lb 0 lb 1440 lb 271 lb 0 lb 0 lb 2 lb ----- 10789 lb Structure Total:	<u>Structure Notes:</u> . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS 4. CASTING BY ICAST (HOE MC-375 F/C SANITARY) . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE NO STEP F/G - 24" - (P3)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd