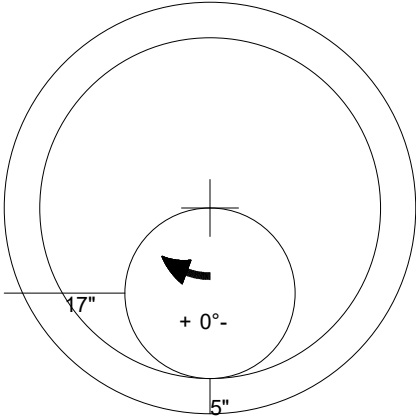


Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks		Plant: 100 8/26/2026 3:50:00 PM	Tech: Jared - F PC: E. Bradley	
Structure ID: T4 SS-MH P2 MH048CN42-S		ECC CONE w/ 24" HOLE NO STEP F/G		
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - ECC CONE w/ 24" HOLE NO STEP F/G - 42" P1) 48" - MH BASE NO STEP T/h - 36" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-375 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0350 1) A-Lok - 0285		0 lb 270 lb 3000 lb 3722 lb 0 lb 0 lb 1440 lb 271 lb 0 lb 0 lb 0 lb 2 lb 1 lb ----- Structure Total: 8706 lb	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS 4. CASTING BY ICAST (HOE MC-375 F/C SANITARY) . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 42"	Weight (Net): 3000 lb Volume (Net): 0.5cu.yd