



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/28/2026 2:16:47 PM		Tech: Jared - F PC: E. Bradley			
Structure ID: A2 ST-YD										
P1 MH072BA66		MH BASE T/n								
P3) 24" x 24" - CASTING HEIGHT - 4" P2) 72" - MH FLAT TOP w/24"x24" Hole F/G - 15" P1) 72" - MH BASE T/n - 66" 1) CASTING - HOE 280T F/G 1) 72" - Conseal CS-102 1.00" 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 55 5) MH Step ML-10-TDS-NCR - 10"					0 lb 4772 lb 10419 lb 182 lb 0 lb 0 lb 0 lb 0 lb ----- 15373 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.			
Rim: 930.71' Rim to Invert: 6.96' Slack: 1.47" Sump: 2.95" Step Position: 90										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	923.75'	0°	0"	48" HDPE	53.5"	Hole 55	55"	62.591"	0"	0"
Invert 2	923.75'	200°	150.125"	48" HDPE	53.5"	Hole 55	55"	62.591"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

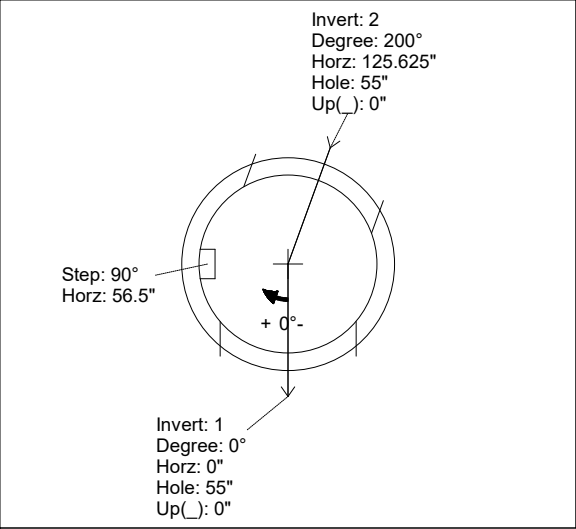

UPSIDE-DOWN VIEW (int. dimensions)

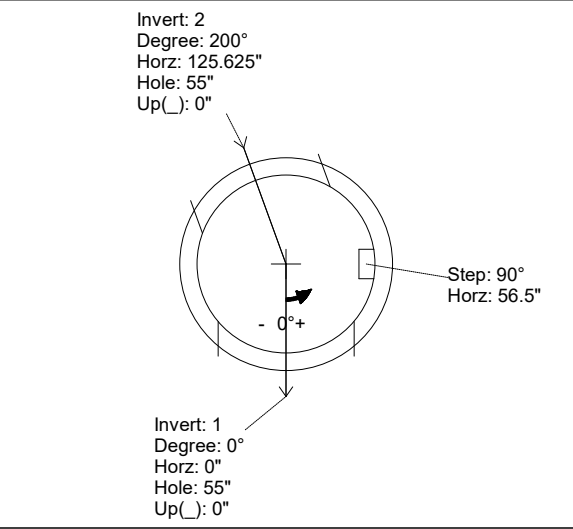

INSIDE WALL DIMENSIONS

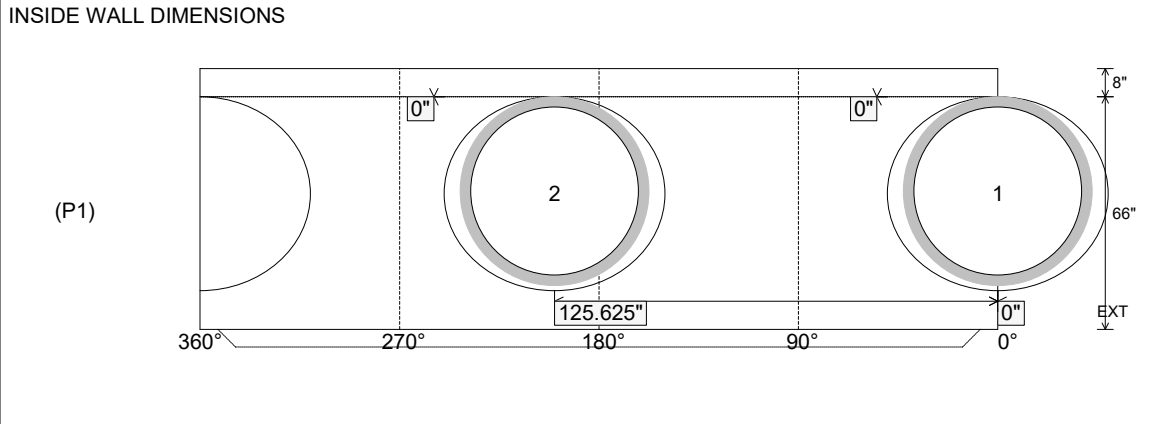

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 7" Floor Height: 8"	Height (Int): 66" Height (Ext): 74"	Weight (Net): 10419 lb Volume (Net): 2.66cu.yd
----------------------------------	---------------------------------	--	--	---