



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/28/2026 2:21:30 PM		Tech: Jared - F PC: E. Bradley			
Structure ID: A3 ST-CI										
P1 MH072BA60		MH BASE T/n								
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 72" - MH FLAT TOP w/24"x36" Hole F/G - 15" P1) 72" - MH BASE T/n - 60" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 72" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 56 5) MH Step ML-10-TDS-NCR - 10"					0 lb 4530 lb 9413 lb 442 lb 0 lb 0 lb 0 lb 0 lb 0 lb 14385 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL 4. CASTING BY ICAST (HOE 525 LV SET (F/G/H)) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DOUBLE MAT) - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.			
Rim: 930.51' Rim to Invert: 6.56' Slack: 0.72" Sump: 3" Step Position: 270°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	923.95'	0°	0"	48" HDPE	53.5"	Hole 56	56"	64.161"	0"	0"
Invert 2	923.95'	138°	103.625"	48" HDPE	53.5"	Hole 56	56"	64.161"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

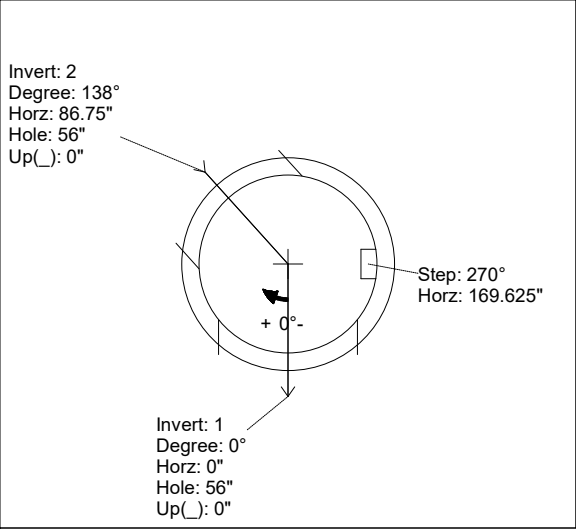

UPSIDE-DOWN VIEW (int. dimenions)

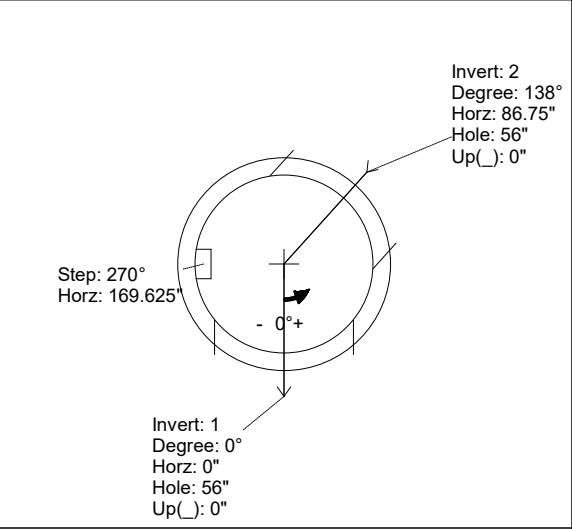

INSIDE WALL DIMENSIONS

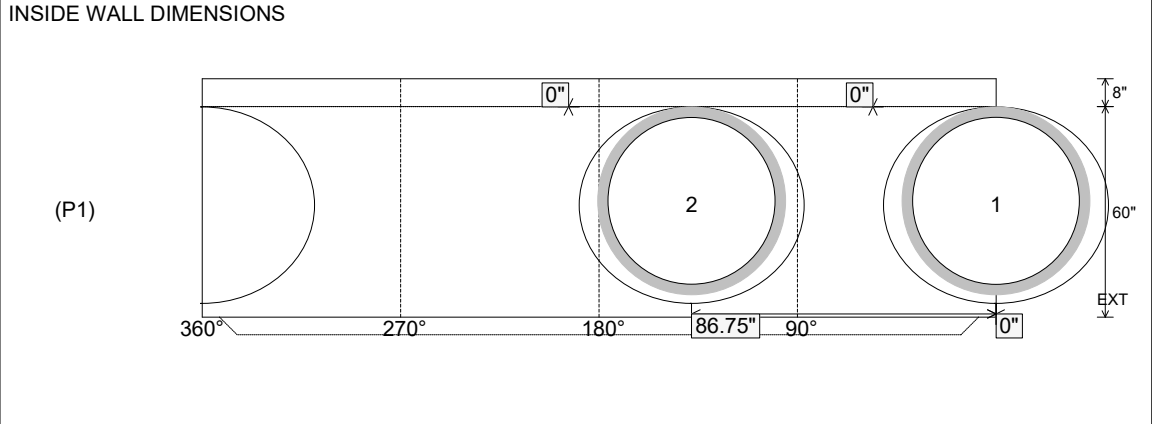

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 7" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 9413 lb Volume (Net): 2.4cu.yd
----------------------------------	---------------------------------	--	--	---