



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks				Plant: 100 9/24/2026 11:27:04 AM		Tech: Jared - F PC: E. Bradley				
Structure ID: B2 ST-OCS										
P1 BX4848-08BAVF BOX BASE 8inW, 8inF, Variable Ht F/n										
P2) 48" x 48" - CASTING HEIGHT - 0" P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 44" 1) CASTING - TRASHRACKS LSW-3636 SIDE WALL TRASH RACK 1) CASTING - TRASHRACKS LPK-48 Sq. Top Mount Trash Rack 1) 48" x 48" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 48"x44" 1) Hole - 24 3) MH Step ML-10-TDS-NCR - 10" Structure Total: 8529 lb						Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,500 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (TRASHRACKS LPK-4848 PEAKED ROOF TRASH RACK) 5. TRASHRACKS LSW-3636 SIDE WALL TRASH RACK SUPPLIED BY ICAST. REINFORCING PER ASTM A615 (GRADE 60). -WALLS (As. 12) #5 BARS AT 12" C.C.E.W. -FLOOR (As. 12) #5 BARS AT 12" C.C.E.W.				
Rim: 926.5' Rim to Invert: 3.27' Slack: -0.76" Sump: 4" Step Position: 90°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	923.23'	0°	32"	36" RCP B WALL	44"	DOGHOUSE INVRTD 48"x44"	48" x 44"	48"	0"	0"
Invert 2	923.5'	180°	32"	24" Orifice	24"	Hole 24	24"	24"	7.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

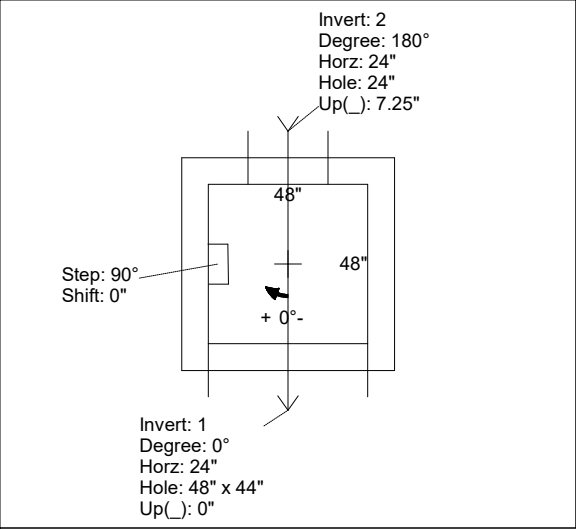

UPSIDE-DOWN VIEW (int. dimensions)

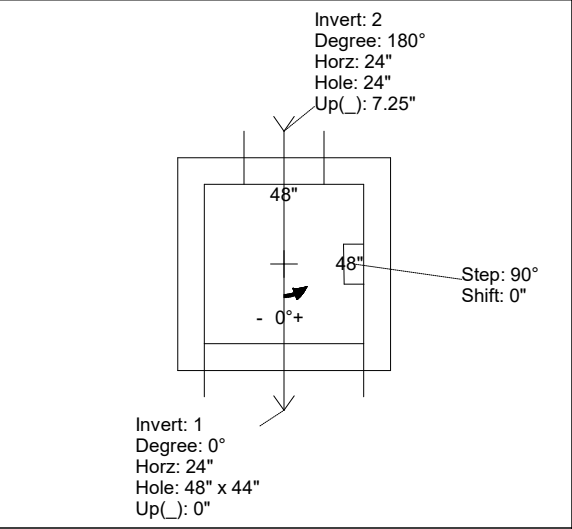

INSIDE WALL DIMENSIONS

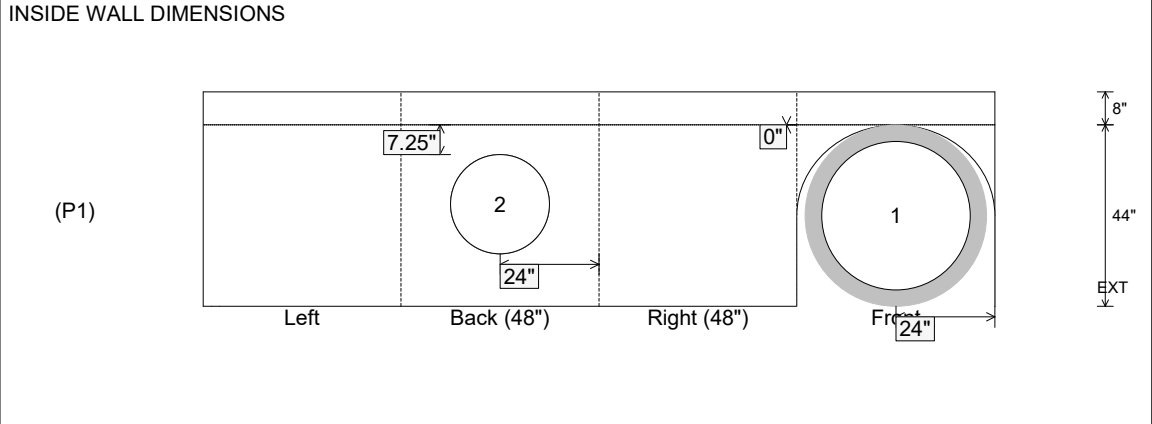

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 44" Height (Ext): 52"	Weight (Net): 8113 lb Volume (Net): 2.07cu.yd
----------------------------------	-------------------------------	--	--	--