


Contractor: KY Earthworks

Plant: 100



Slack: 0.26"

Structure Total:	4238 lb
------------------	---------

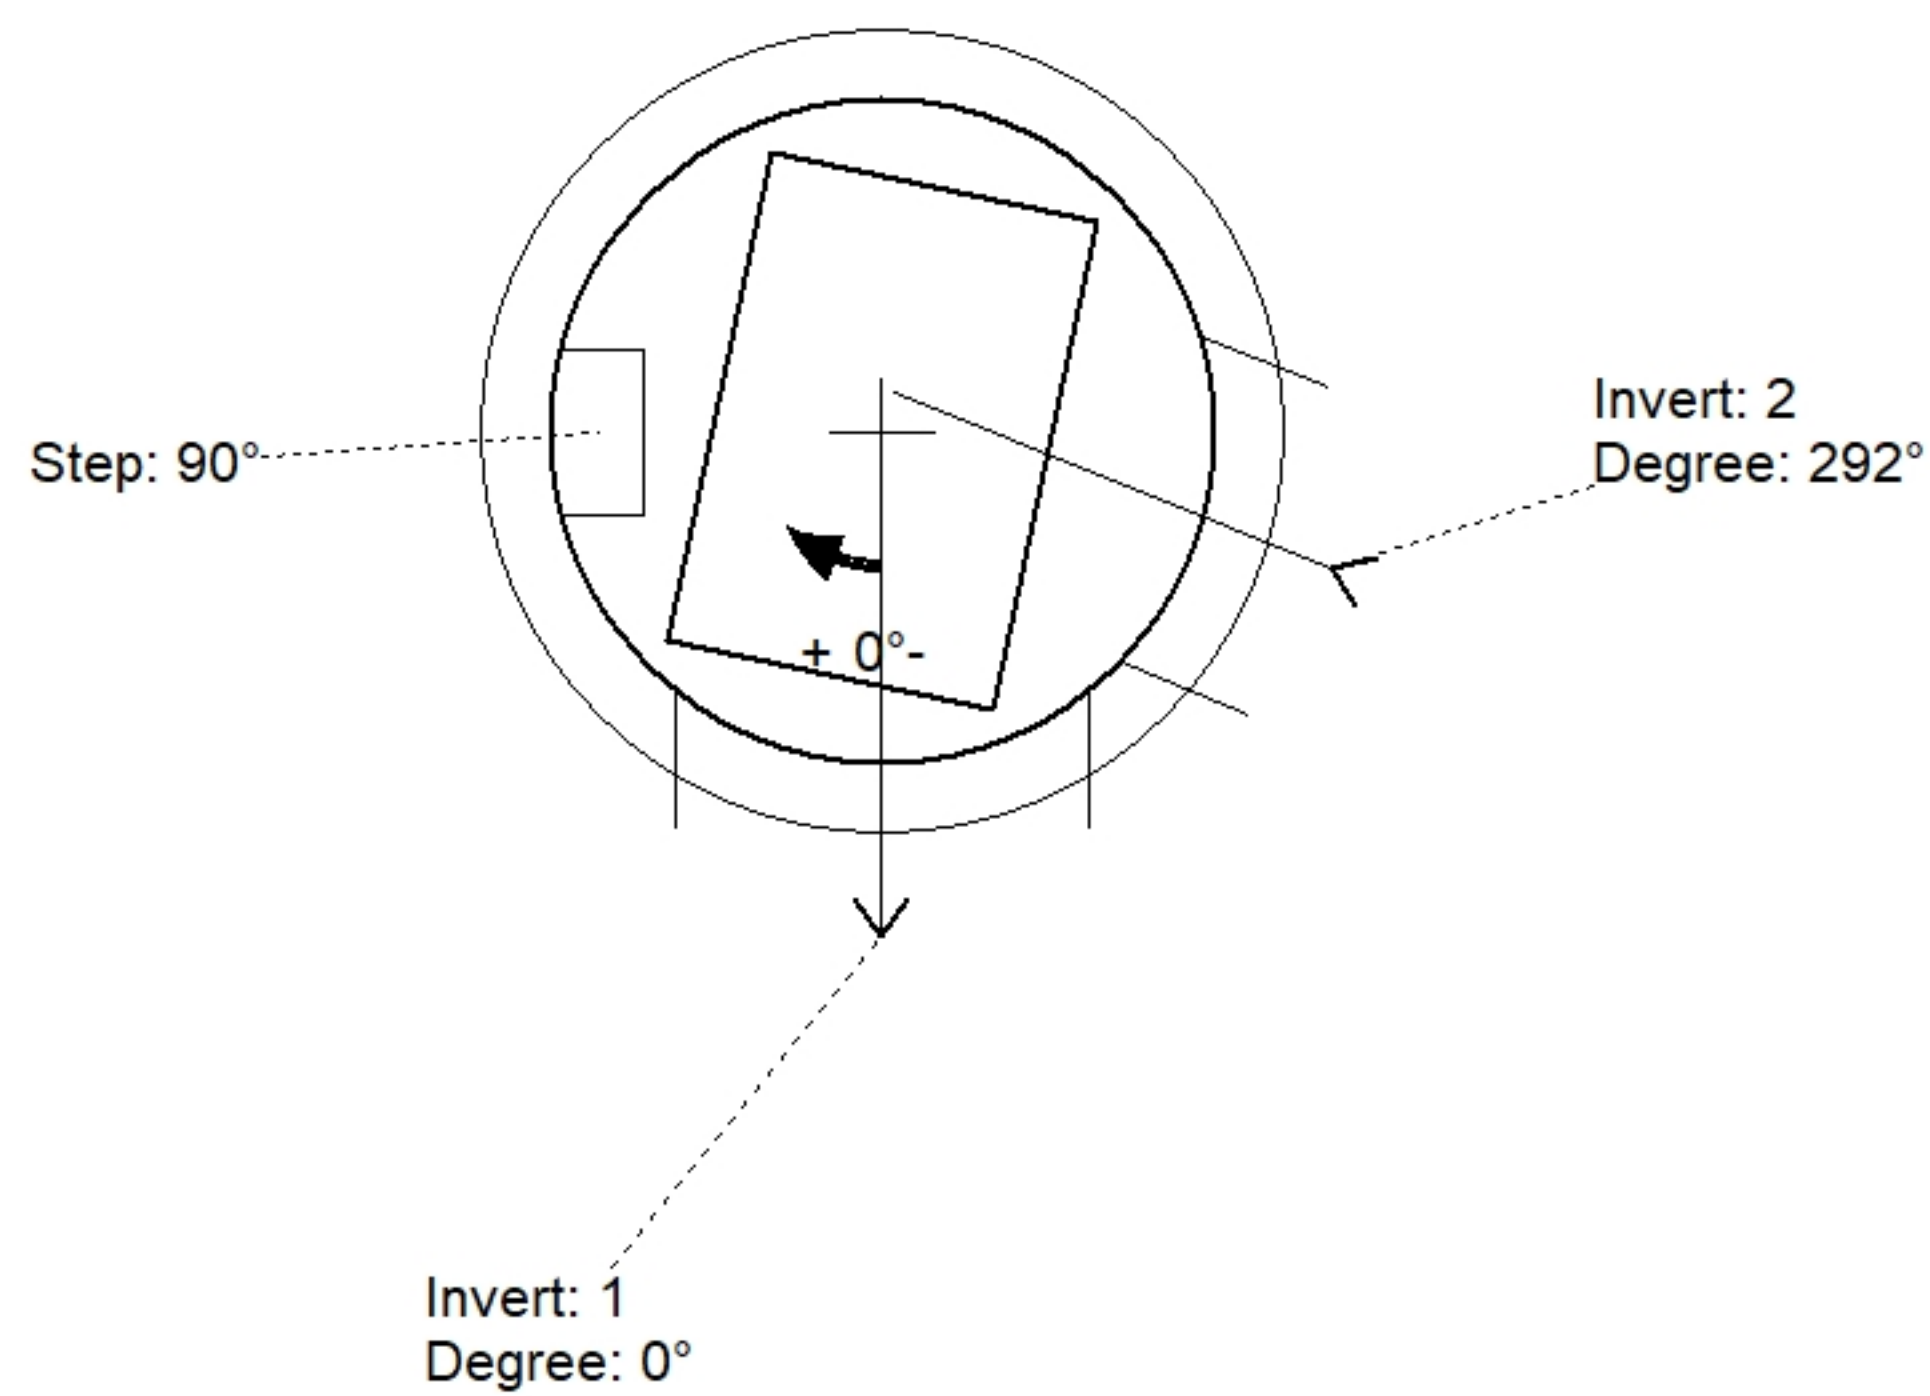


Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	933.49'							
Reducer								
Invert 1	930.21'	0°	24" HDPE	27.8"	30" x 28"	DOGHOUSE INVRTD 30"x28"	0"	P1
Invert 2	930.21'	292°	18" HDPE	21.2"	24"	Hole 24	0.3"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 36" - CASTING HEIGHT - 6" - (P3)

48" - MH FLAT TOP w/24"x36" Hole - 7" - (P2)

48" - MH BASE Custom Ht - 28" - (P1)

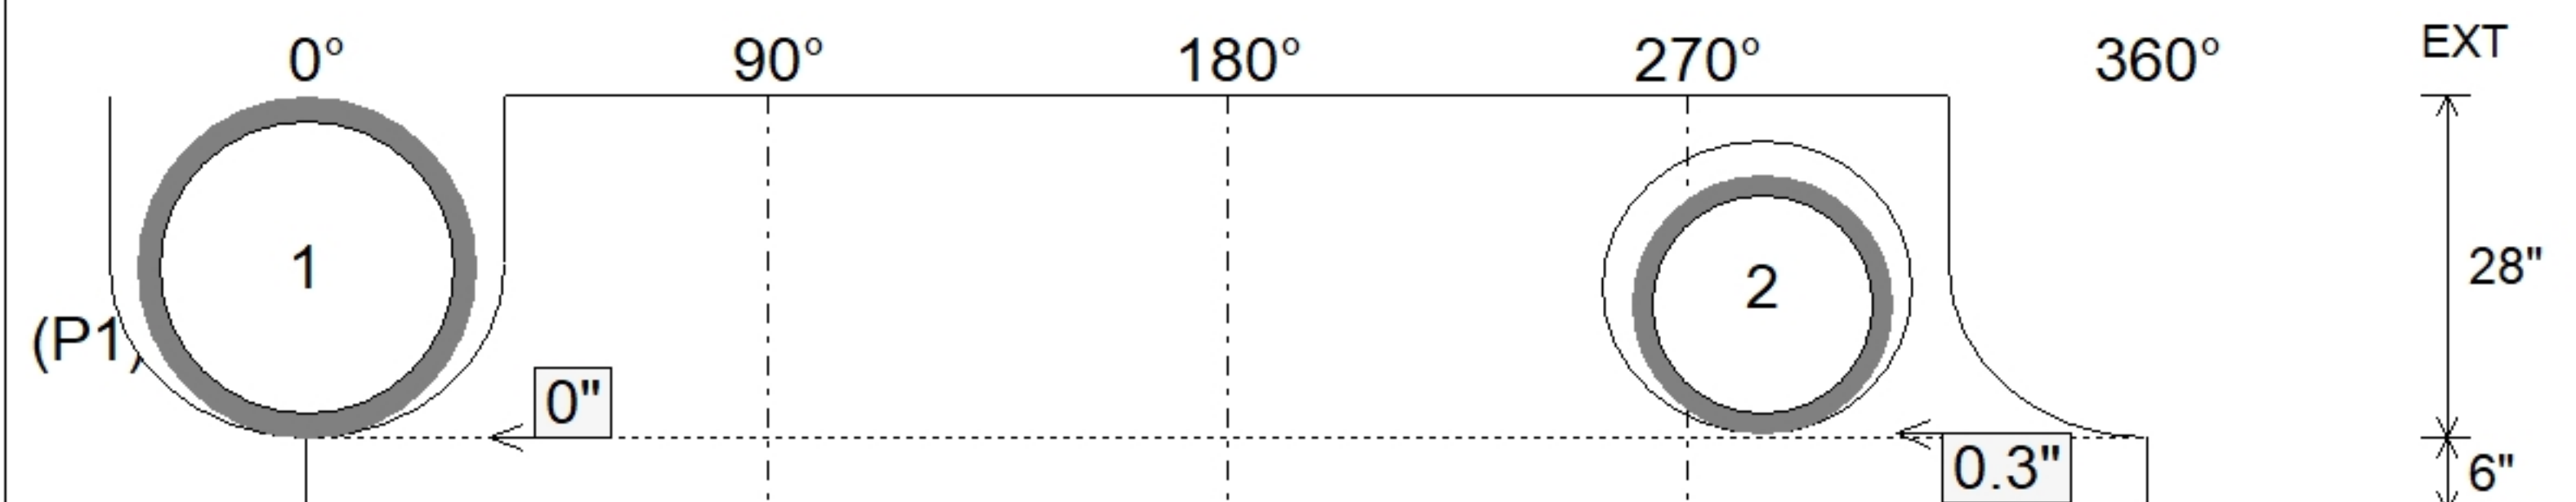

SUBMITTAL
APPROVED BY: