



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/24/2026 11:26:58 AM		Tech: Jared - F PC: E. Bradley			
Structure ID: D4 ST-YD										
P1 MH060BAVF			MH BASE Custom Ht T/n							
P4) 24" x 24" - CASTING HEIGHT - 4" P3) 60" - MH FLAT TOP w/24"x24" Hole F/G - 13" P2) 60" - MH RISER T/G - 24" P1) 60" - MH BASE Custom Ht T/n - 58" 1) CASTING - HOE 280T F/G 2) 60" - Conseal CS-102 1.00" 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 44 7) MH Step ML-10-TDS-NCR - 10"					0 lb 2619 lb 2505 lb 7105 lb 182 lb 0 lb 0 lb 0 lb 0 lb ----- 12411 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL 4. CASTING BY ICAST (HOE 280T F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.			
Rim: 934.18' Rim to Invert: 8.1' Slack: 1.05" Sump: 2.85" Step Position: 90°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	926.08'	0°	0"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"
Invert 2	926.08'	180°	113.125"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

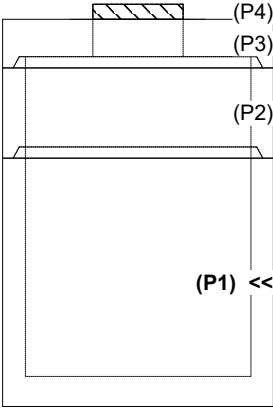


(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

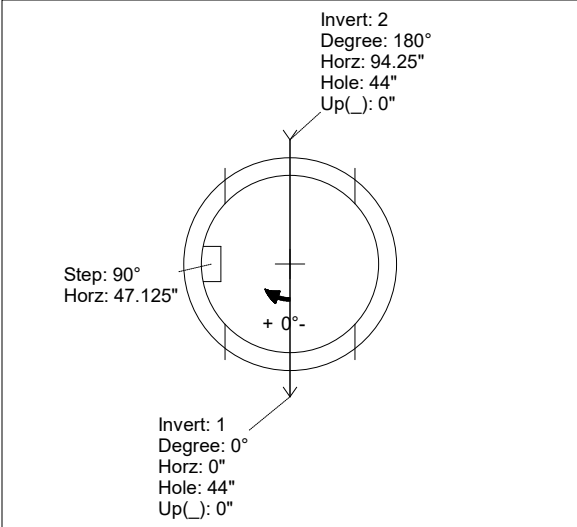

UPSIDE-DOWN VIEW (int. dimensions)

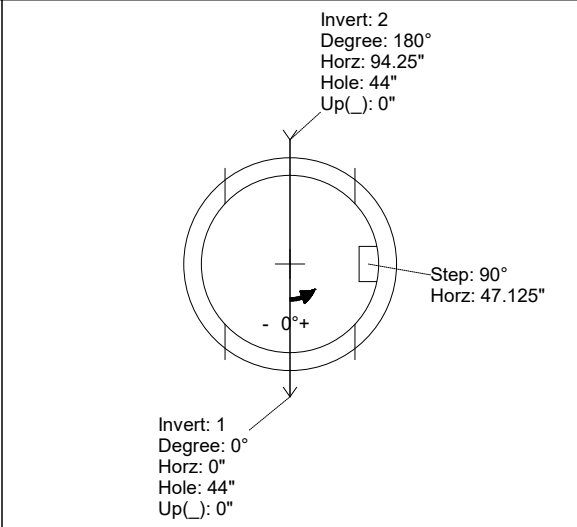

INSIDE WALL DIMENSIONS

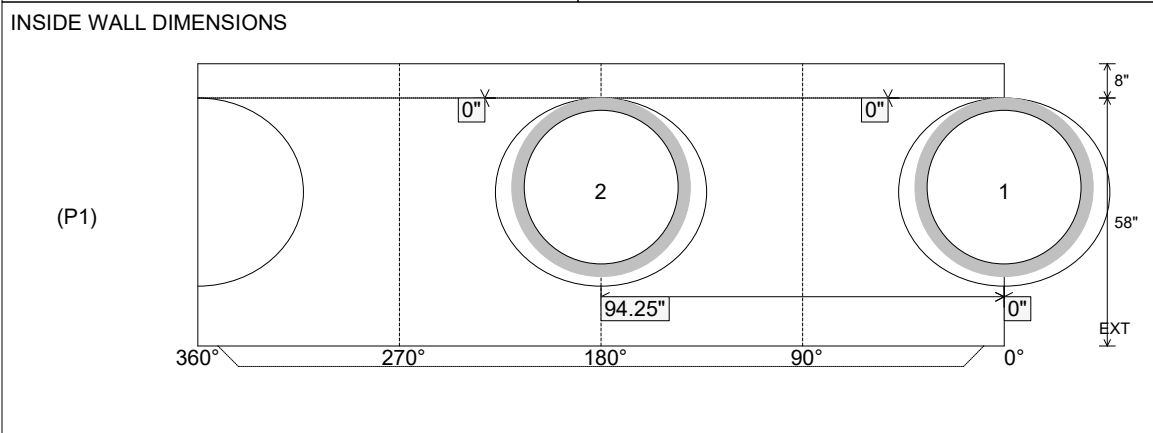

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 58" Height (Ext): 66"	Weight (Net): 7105 lb Volume (Net): 1.82cu.yd
----------------------------------	---------------------------------	--	--	--