



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/24/2026 11:26:57 AM		Tech: Jared - F PC: E. Bradley					
Structure ID: D5 ST-YD												
P1 MH060BA54					MH BASE T/n							
P3) 24" x 24" - CASTING HEIGHT - 4" P2) 60" - MH FLAT TOP w/24"x24" Hole F/G - 13" P1) 60" - MH BASE T/n - 54" 1) CASTING - HOE 280T F/G 1) 60" - Conseal CS-102 1.00" 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 44 1) Hole - 20 4) MH Step ML-10-TDS-NCR - 10"					0 lb 2619 lb 6527 lb 182 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 9328 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.					
Rim: 933.1' Rim to Invert: 5.86' Slack: 2.17' Sump: 2.85' Step Position: 205												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	927.24'	0°	0"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"		
Invert 2	927.24'	125°	78.5"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"		
Invert 3	928.6'	254°	159.625"	15" HDPE	17.6"	Hole 20	20"	20.39"	17.875"	0"		
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												


RIGHT-SIDE UP VIEW (int. dimensions)

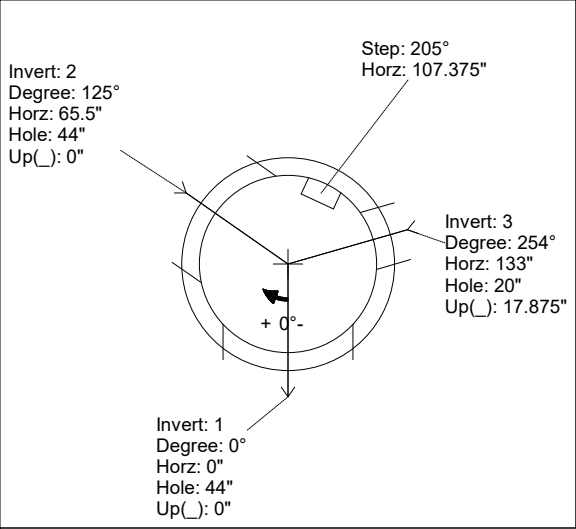

UPSIDE-DOWN VIEW (int. dimensions)

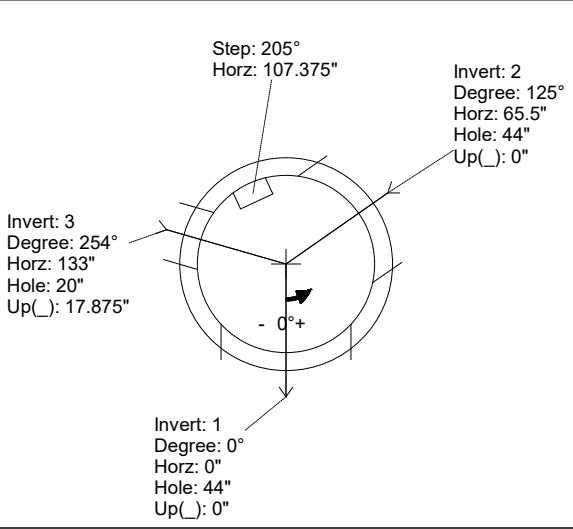

INSIDE WALL DIMENSIONS

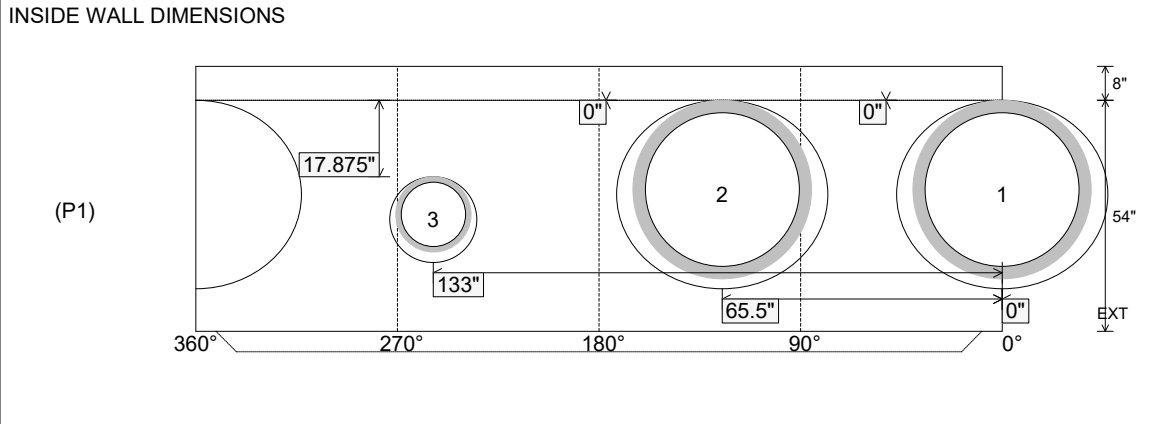

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 54" Height (Ext): 62"	Weight (Net): 6527 lb Volume (Net): 1.67cu.yd
----------------------------------	---------------------------------	--	--	--