


Contractor: KY Earthworks

Plant: 100




Slack: 2.17"

Structure Total:	9328 lb
------------------	---------

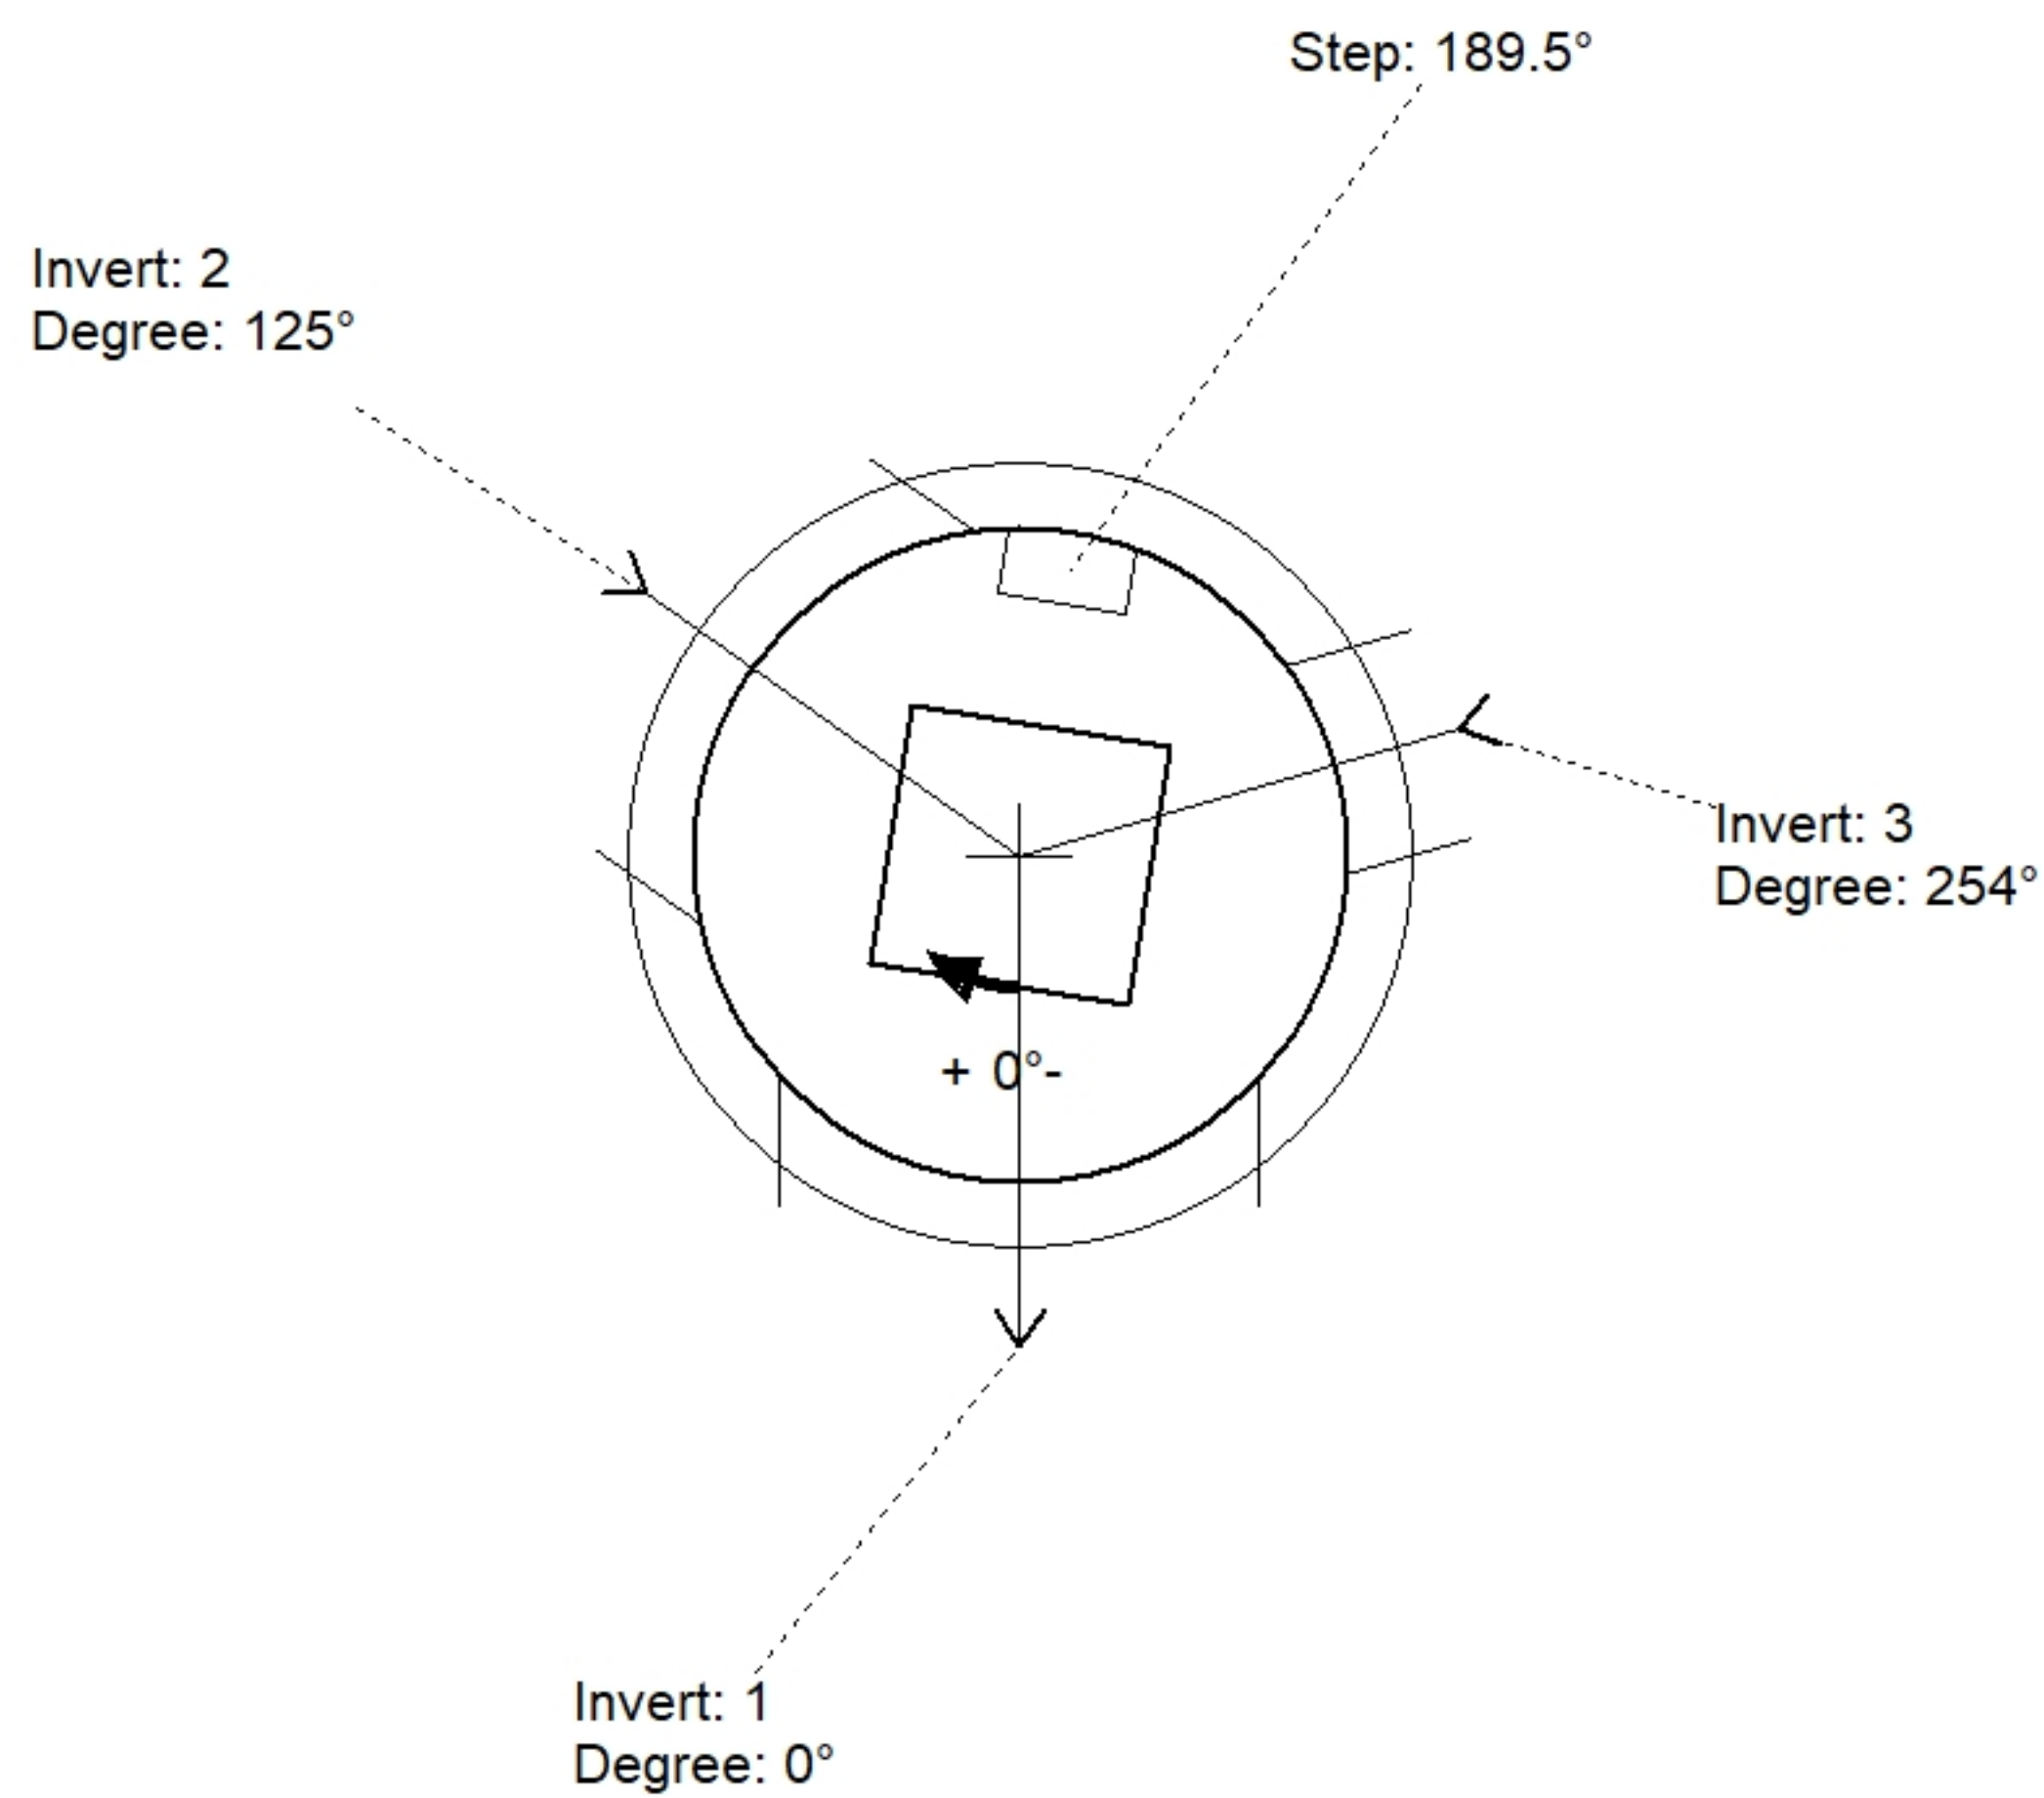

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	933.1'							
Reducer								
Invert 1	927.24'	0°	36" HDPE	41.7"	44"	Hole 44	0"	P1
Invert 2	927.24'	125°	36" HDPE	41.7"	44"	Hole 44	0"	P1
Invert 3	928.6'	254°	15" HDPE	17.6"	20"	Hole 20	17.87"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

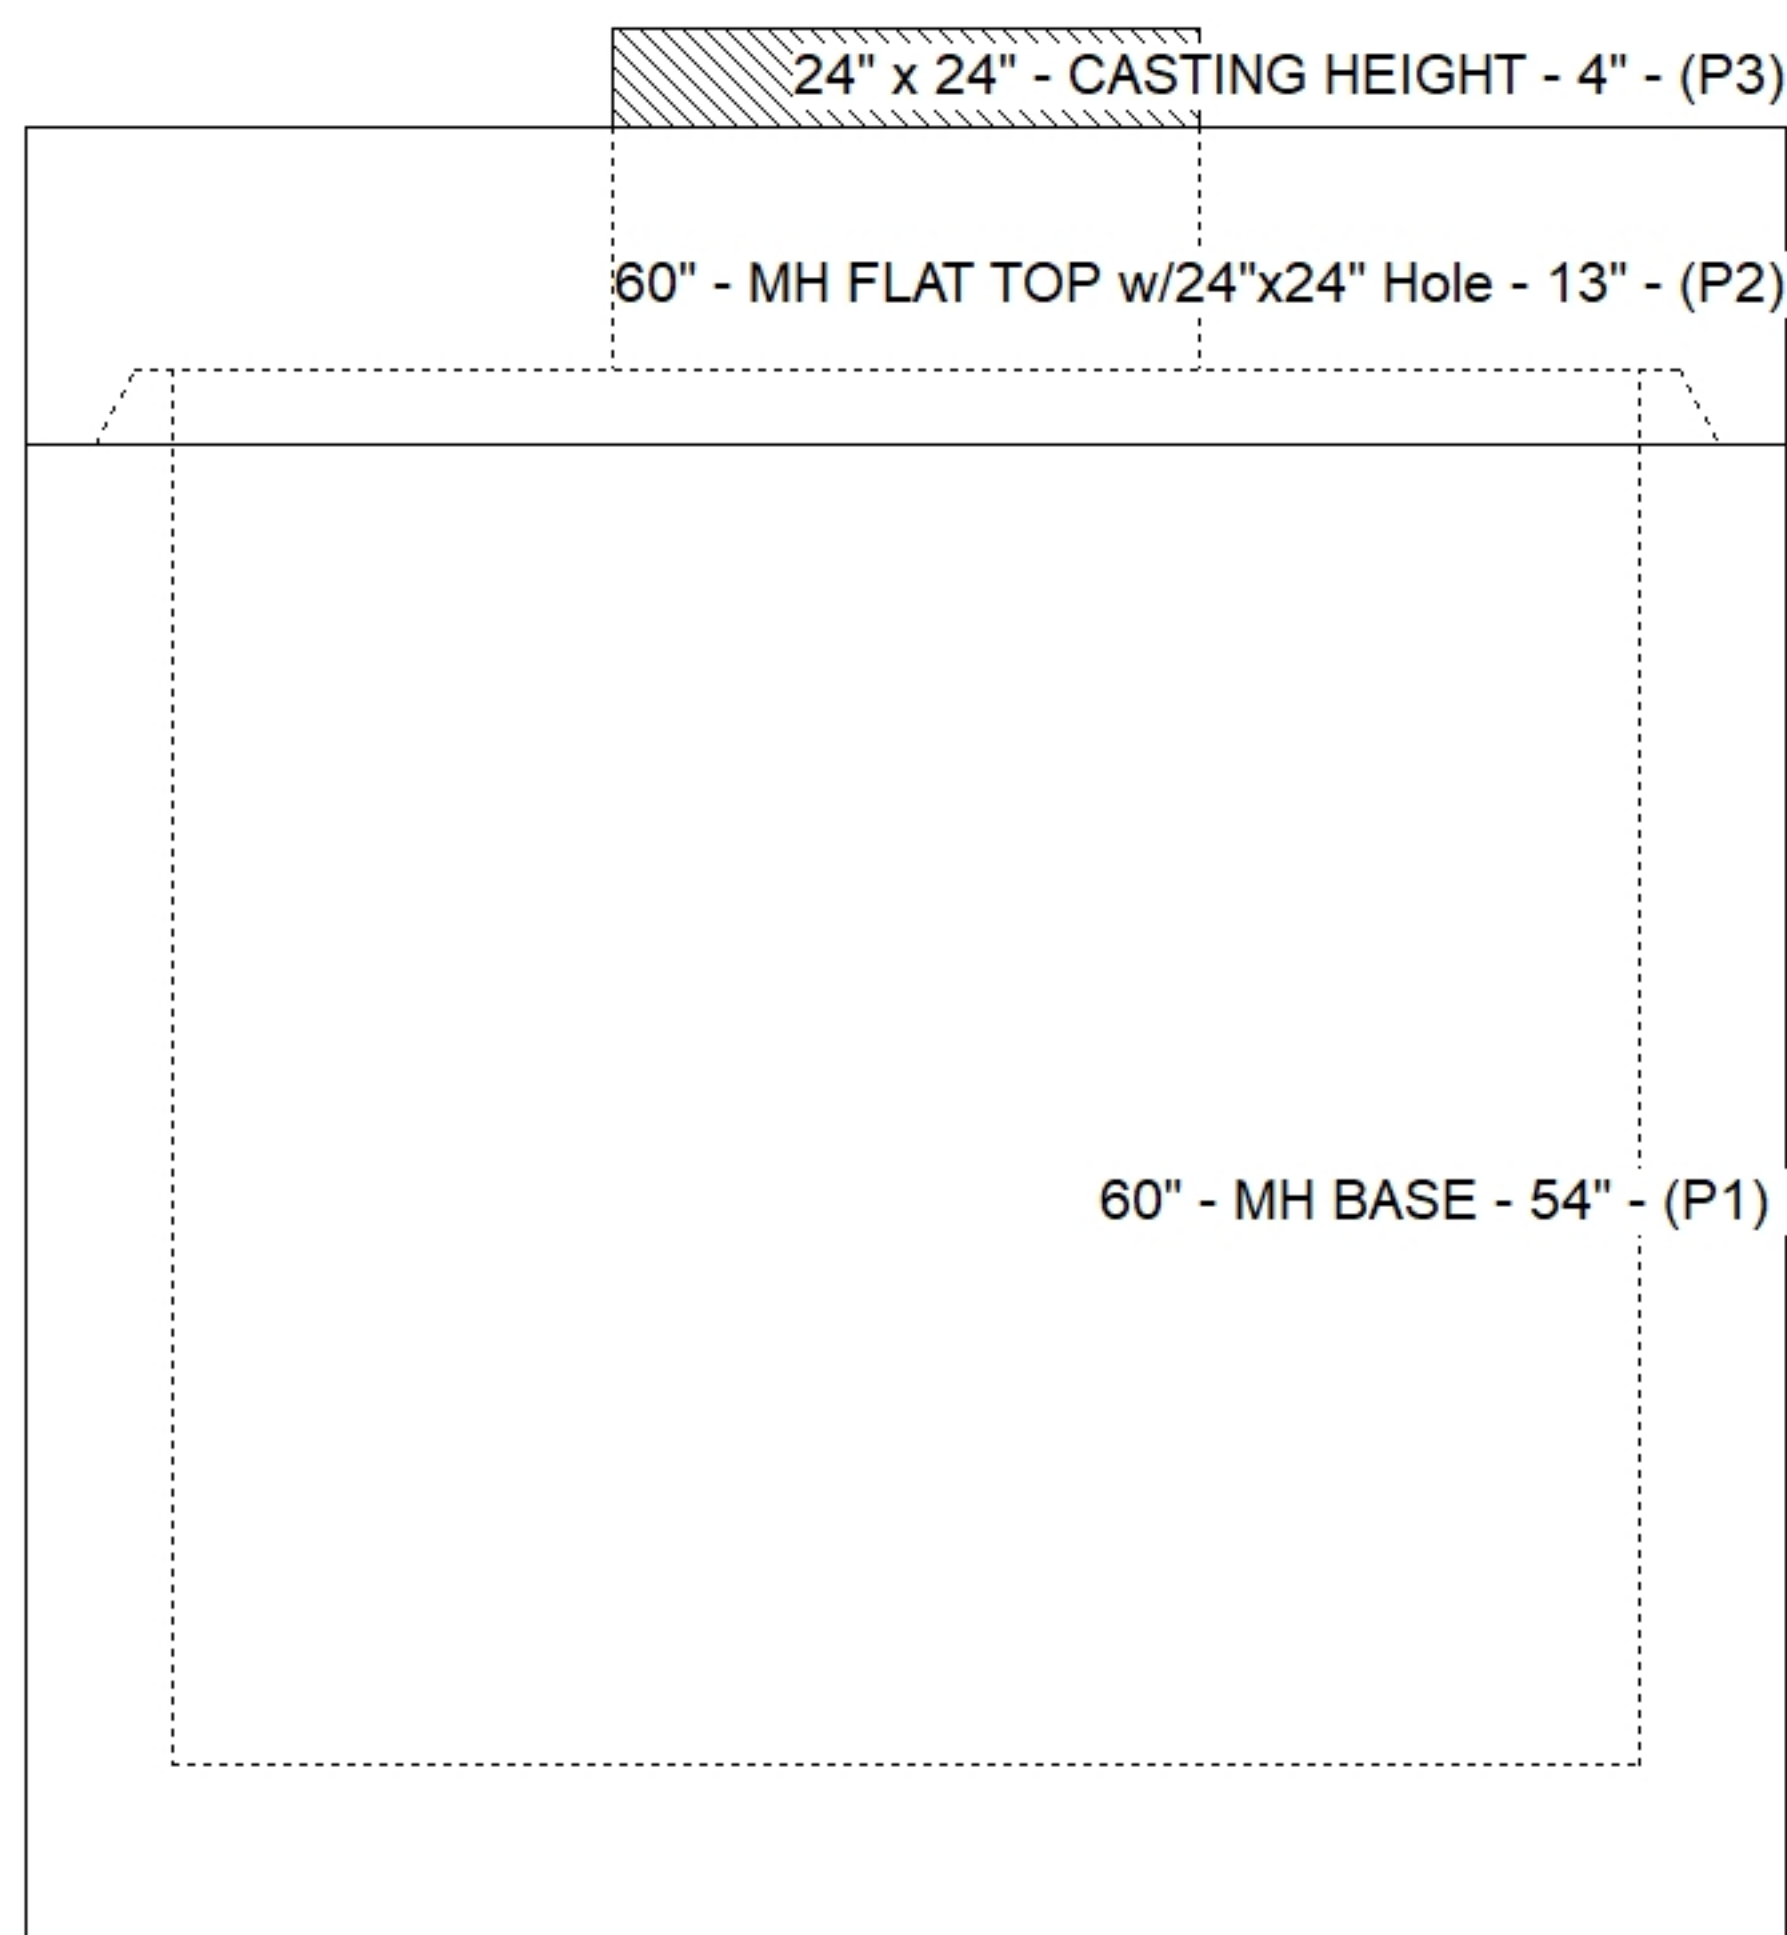

SUBMITTAL
APPROVED BY: