




Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/24/2026 11:31:27 AM		Tech: Jared - F PC: E. Bradley				
Structure ID: D6 ST-CI											
P1 MH060BA54		MH BASE T/n									
P4) 24" x 36" - CASTING HEIGHT - 6" P3) 24" x 36" - GRADE RING F/F - 3" P2) 60" - MH FLAT TOP w/24"x36" Hole F/G - 13" P1) 60" - MH BASE T/n - 54" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 60" - Conseal CS-102 1.00" 2) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 44 1) Hole - 38 1) Hole - 24 4) MH Step ML-10-TDS-NCR - 10"						0 lb 306 lb 3499 lb 6686 lb 442 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 525 LV SET (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 933.85' Rim to Invert: 6.3' Slack: 2.475" Sump: 2.875" Step Position: 270°						Structure Total: 10933 lb					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	927.55'	0°	0"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"	
Invert 2	927.55'	115°	72.25"	30" HDPE	35.1"	Hole 38	38"	41.151"	0.375"	0"	
Invert 3	927.55'	194°	121.875"	18" HDPE	21.2"	Hole 24	24"	24.691"	1.25"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

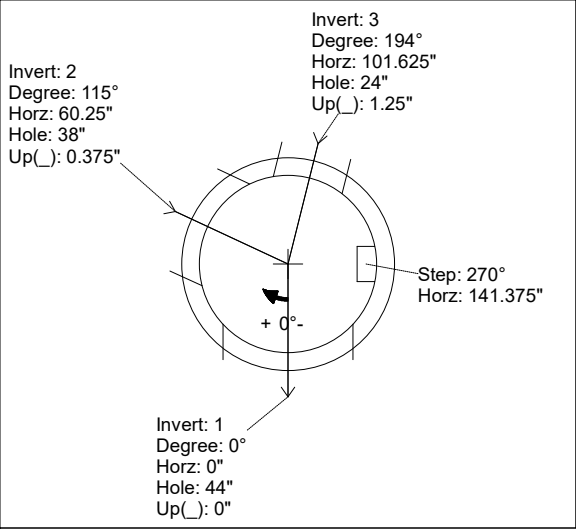


UPSIDE-DOWN VIEW (int. dimensions)

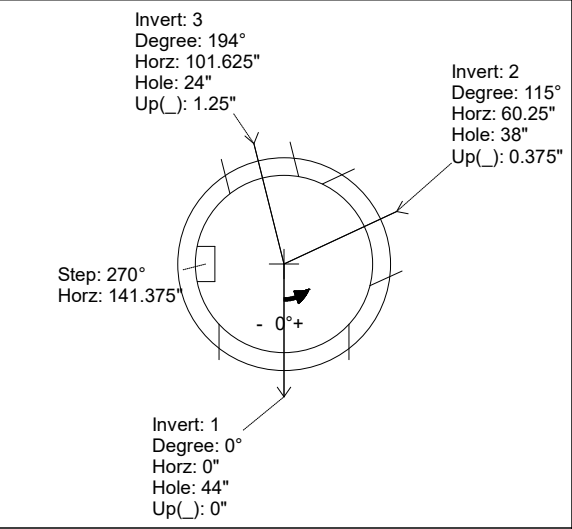



INSIDE WALL DIMENSIONS

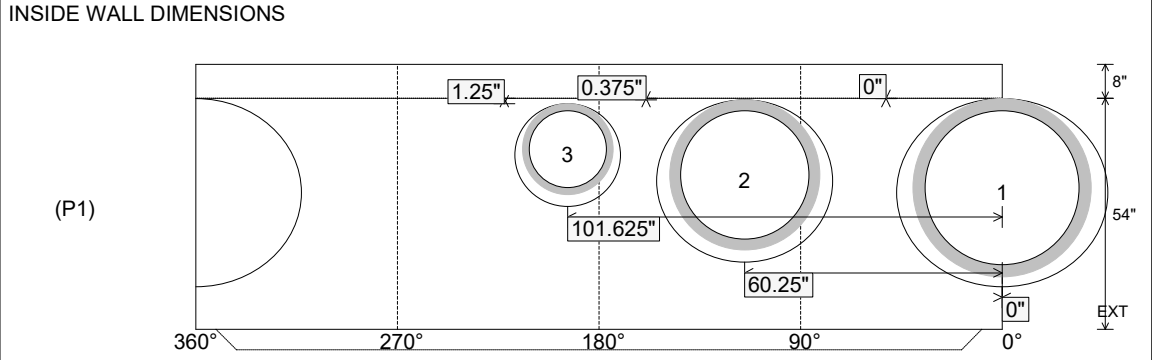

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 54" Height (Ext): 62"	Weight (Net): 6686 lb Volume (Net): 1.71cu.yd
----------------------------------	---------------------------------	--	--	--