



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks					Plant: 100 9/24/2026 11:31:13 AM		Tech: Jared - F PC: E. Bradley			
Structure ID: F9.3 ST-CI										
P1 BX2436-08BVF BOX BASE 8inW, 8inF, Variable Ht F/n										
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 28" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 24" x 36" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 26"x28" 1) Hole - 22					0 lb 3562 lb 442 lb 0 lb 0 lb 0 lb ----- Structure Total: 4004 lb		<u>Structure Notes:</u> 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 525 LV SET (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 934.39' Rim to Invert: 2.77' Slack: 1.74" Sump: 2.5" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	931.62'	90°	26"	18" RCP B WALL	23"	DOGHOUSE INVRTD 26"x28"	26" x 28"	26"	0"	0"
Invert 2	931.62'	270°	26"	15" RCP B WALL	19.5"	Hole 22	22"	22"	0.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										



(P1) <<

(P2)


RIGHT-SIDE UP VIEW (int. dimensions)

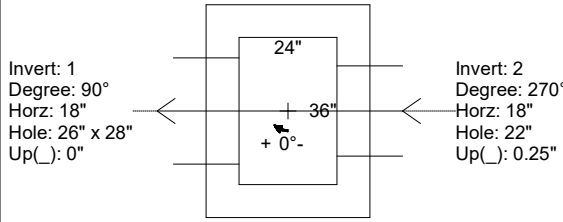

Invert: 1
Degree: 90°
Horz: 18"
Hole: 26" x 28"
Up(): 0"

Invert: 2
Degree: 270°
Horz: 18"
Hole: 22"
Up(): 0.25"


UPSIDE-DOWN VIEW (int. dimensions)

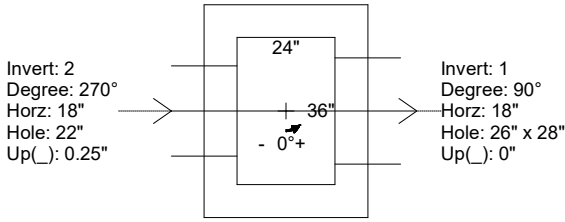

Invert: 2
Degree: 270°
Horz: 18"
Hole: 22"
Up(): 0.25"

Invert: 1
Degree: 90°
Horz: 18"
Hole: 26" x 28"
Up(): 0"

INSIDE WALL DIMENSIONS

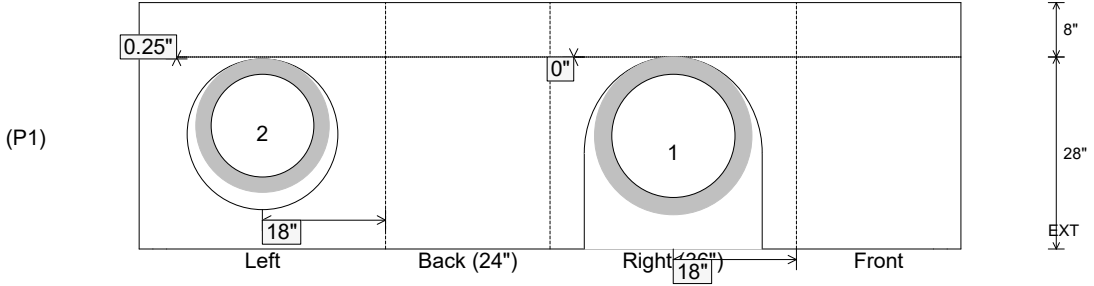

(P1)

0.25"

18"

Back (24")

Right (26")

Front

Left

8"

28"

EXT

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 28" Height (Ext): 36"	Weight (Net): 3562 lb Volume (Net): 0.91cu.yd
----------------------------------	-------------------------------	--	--	--