



Job Name: 26-1822 - Project Versailles Job Location: Versailles, KY Contractor: KY Earthworks				Plant: 100 9/24/2026 11:31:07 AM		Tech: Jared - F PC: E. Bradley				
Structure ID: G3 ST-CI										
P1 BX2436-08BVF				BOX BASE 8inW, 8inF, Variable Ht F/n						
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 37" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 24"				0 lb 4564 lb 442 lb 0 lb 0 lb ----- 0 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 525 LV SET (F/G/H)) REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 926.23' Rim to Invert: 3.59' Slack: 1.705" Sump: 1.625" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	922.64'	90°	26"	18" HDPE	21.2"	Hole 24	24"	24"	0"	0"
Invert 2	922.64'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										



RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

INSIDE WALL DIMENSIONS

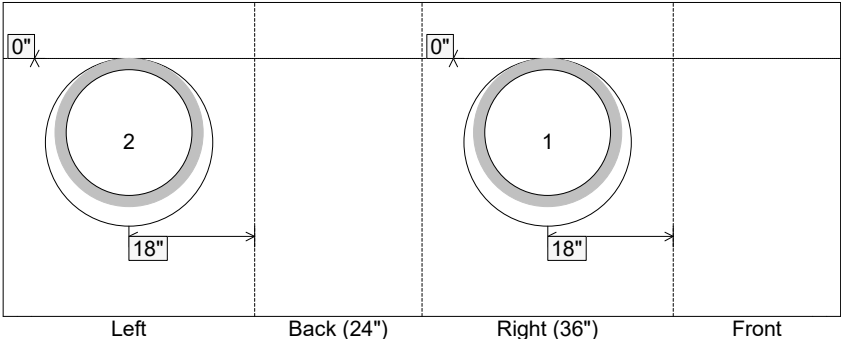

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 37" Height (Ext): 45"	Weight (Net): 4564 lb Volume (Net): 1.17cu.yd
----------------------------------	-------------------------------	--	--	--