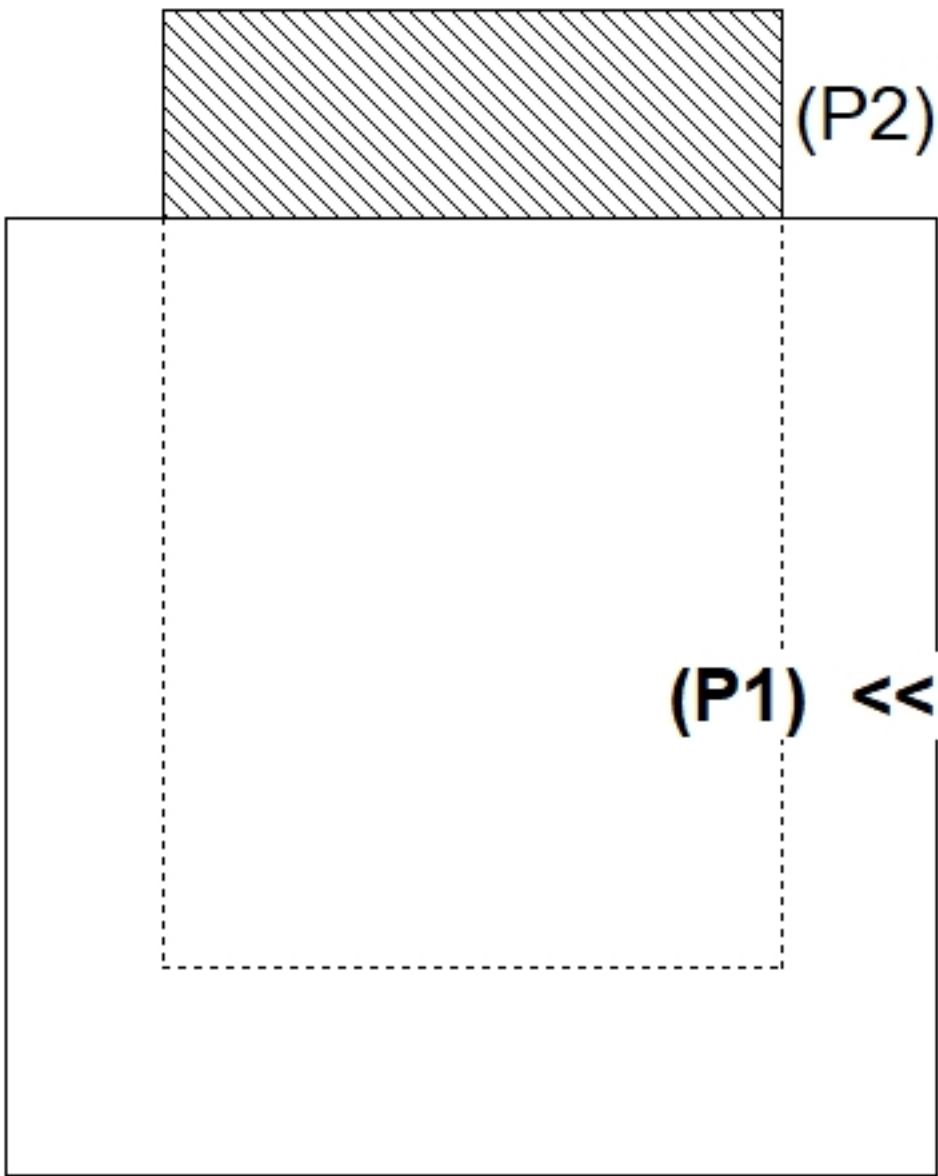
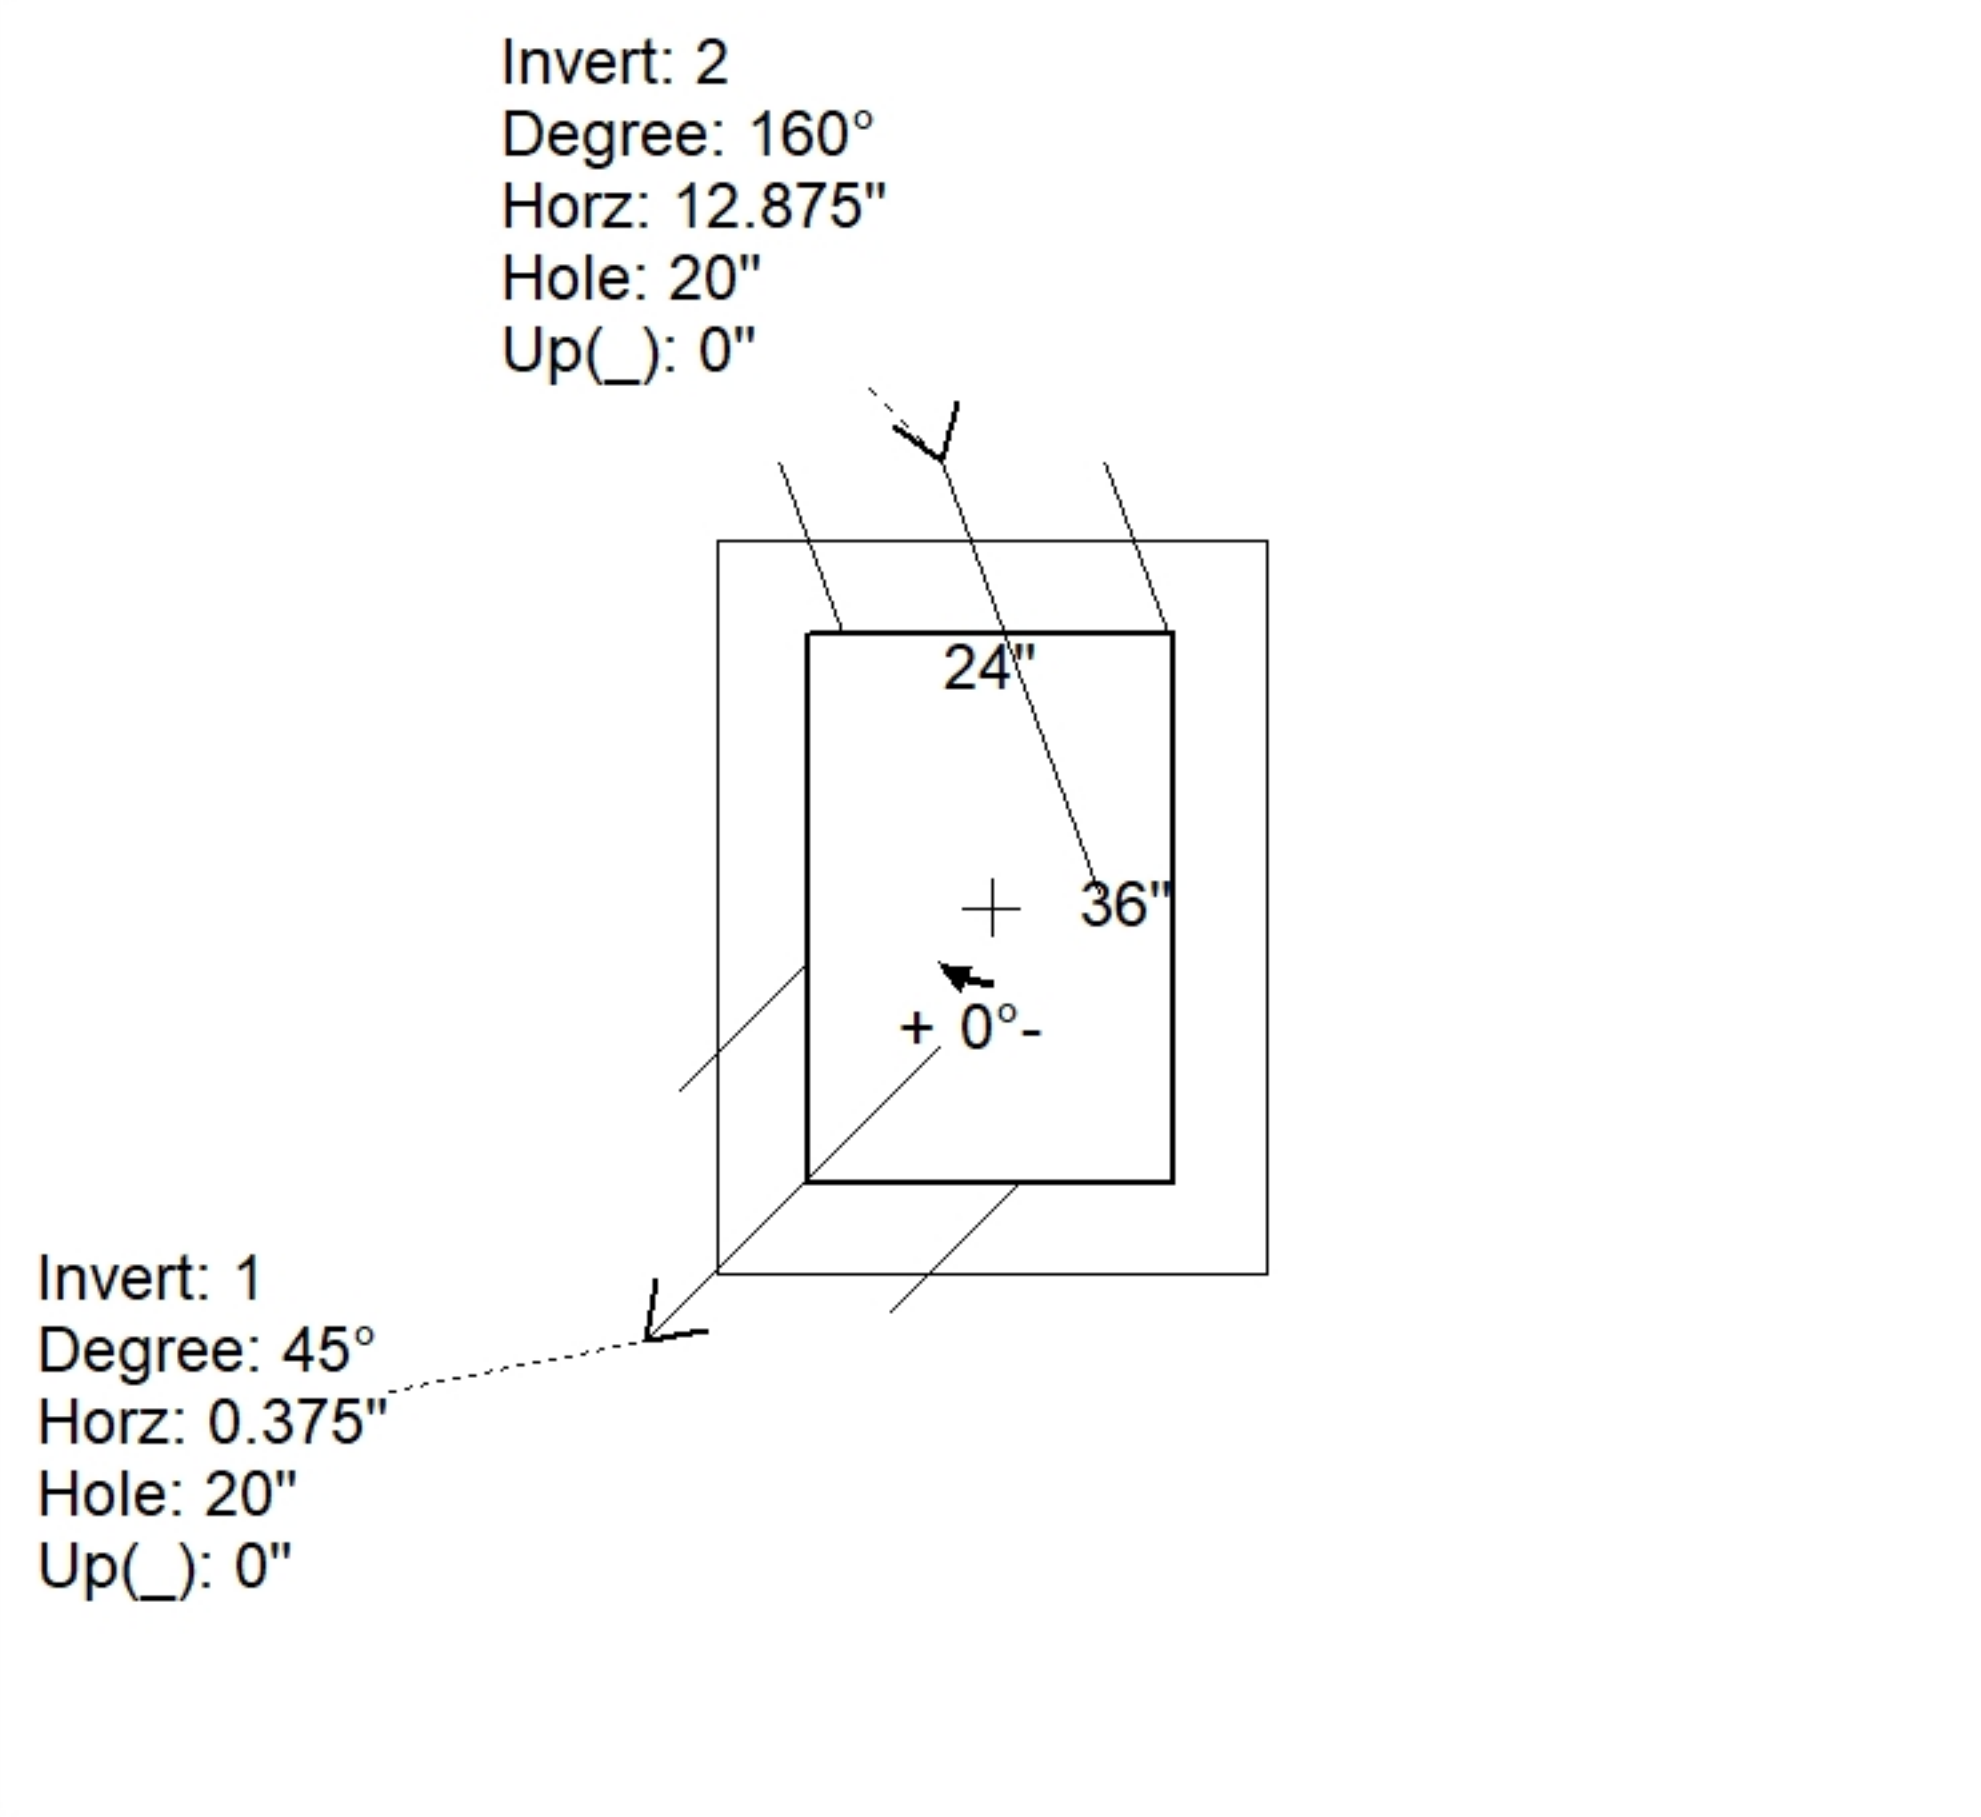
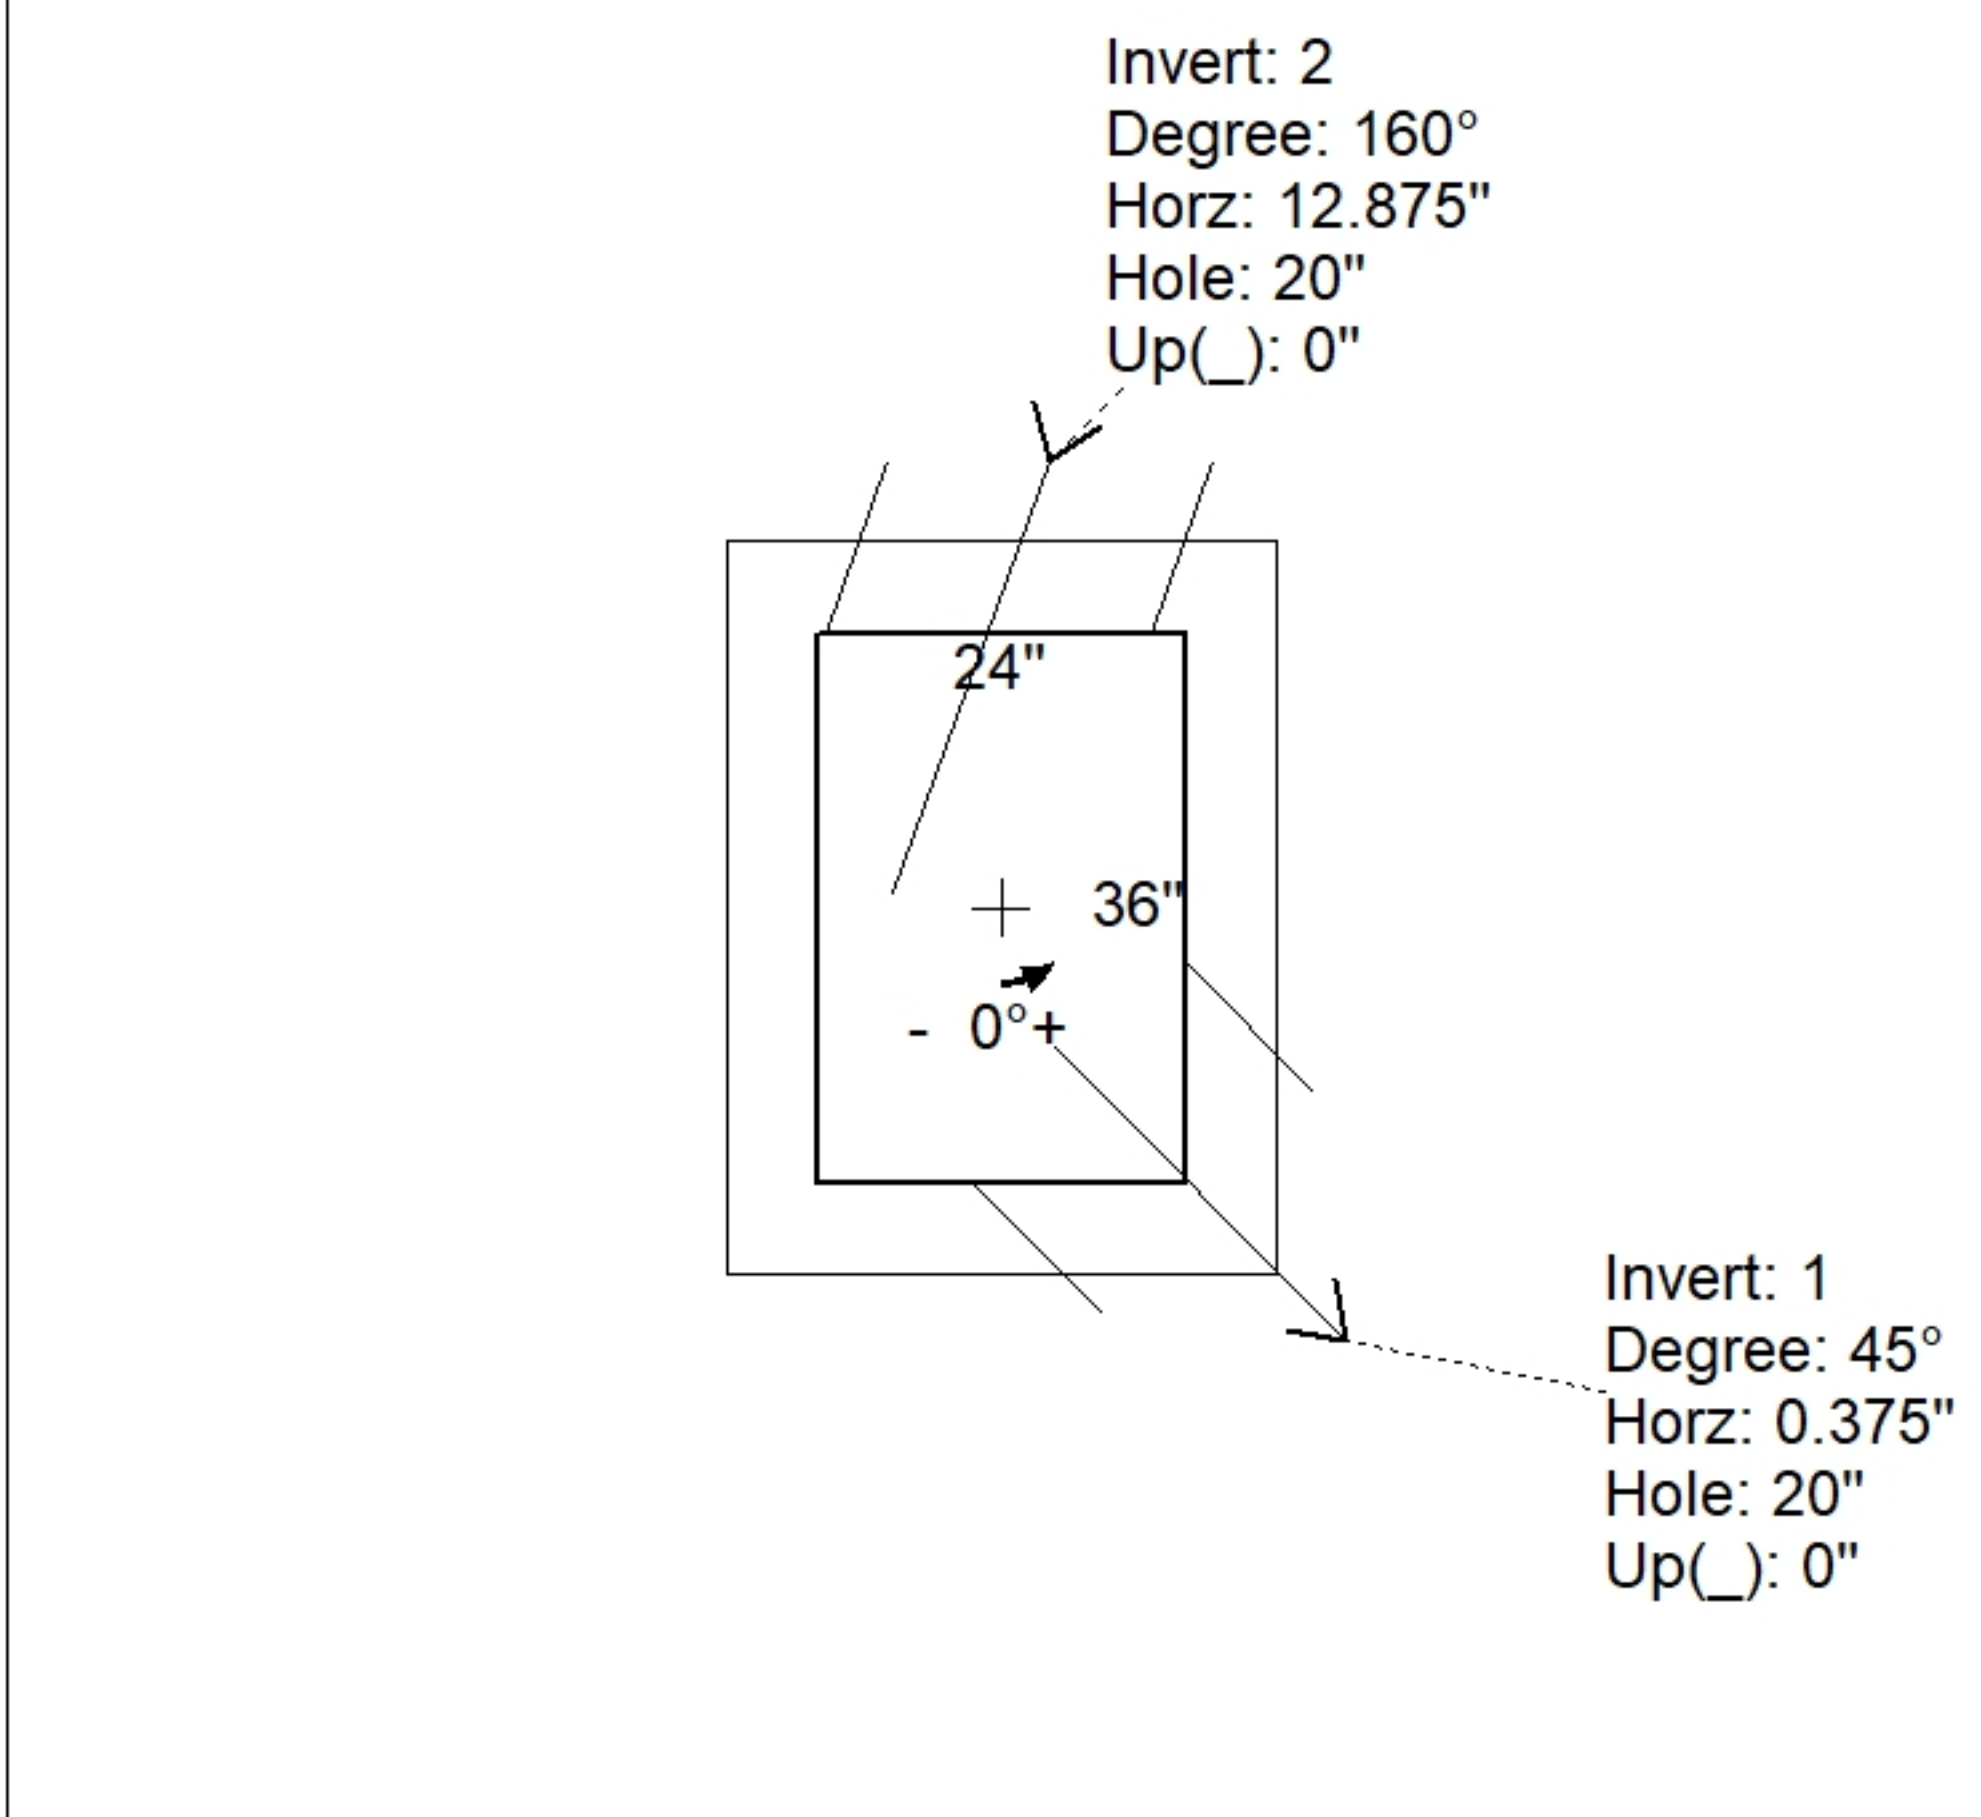
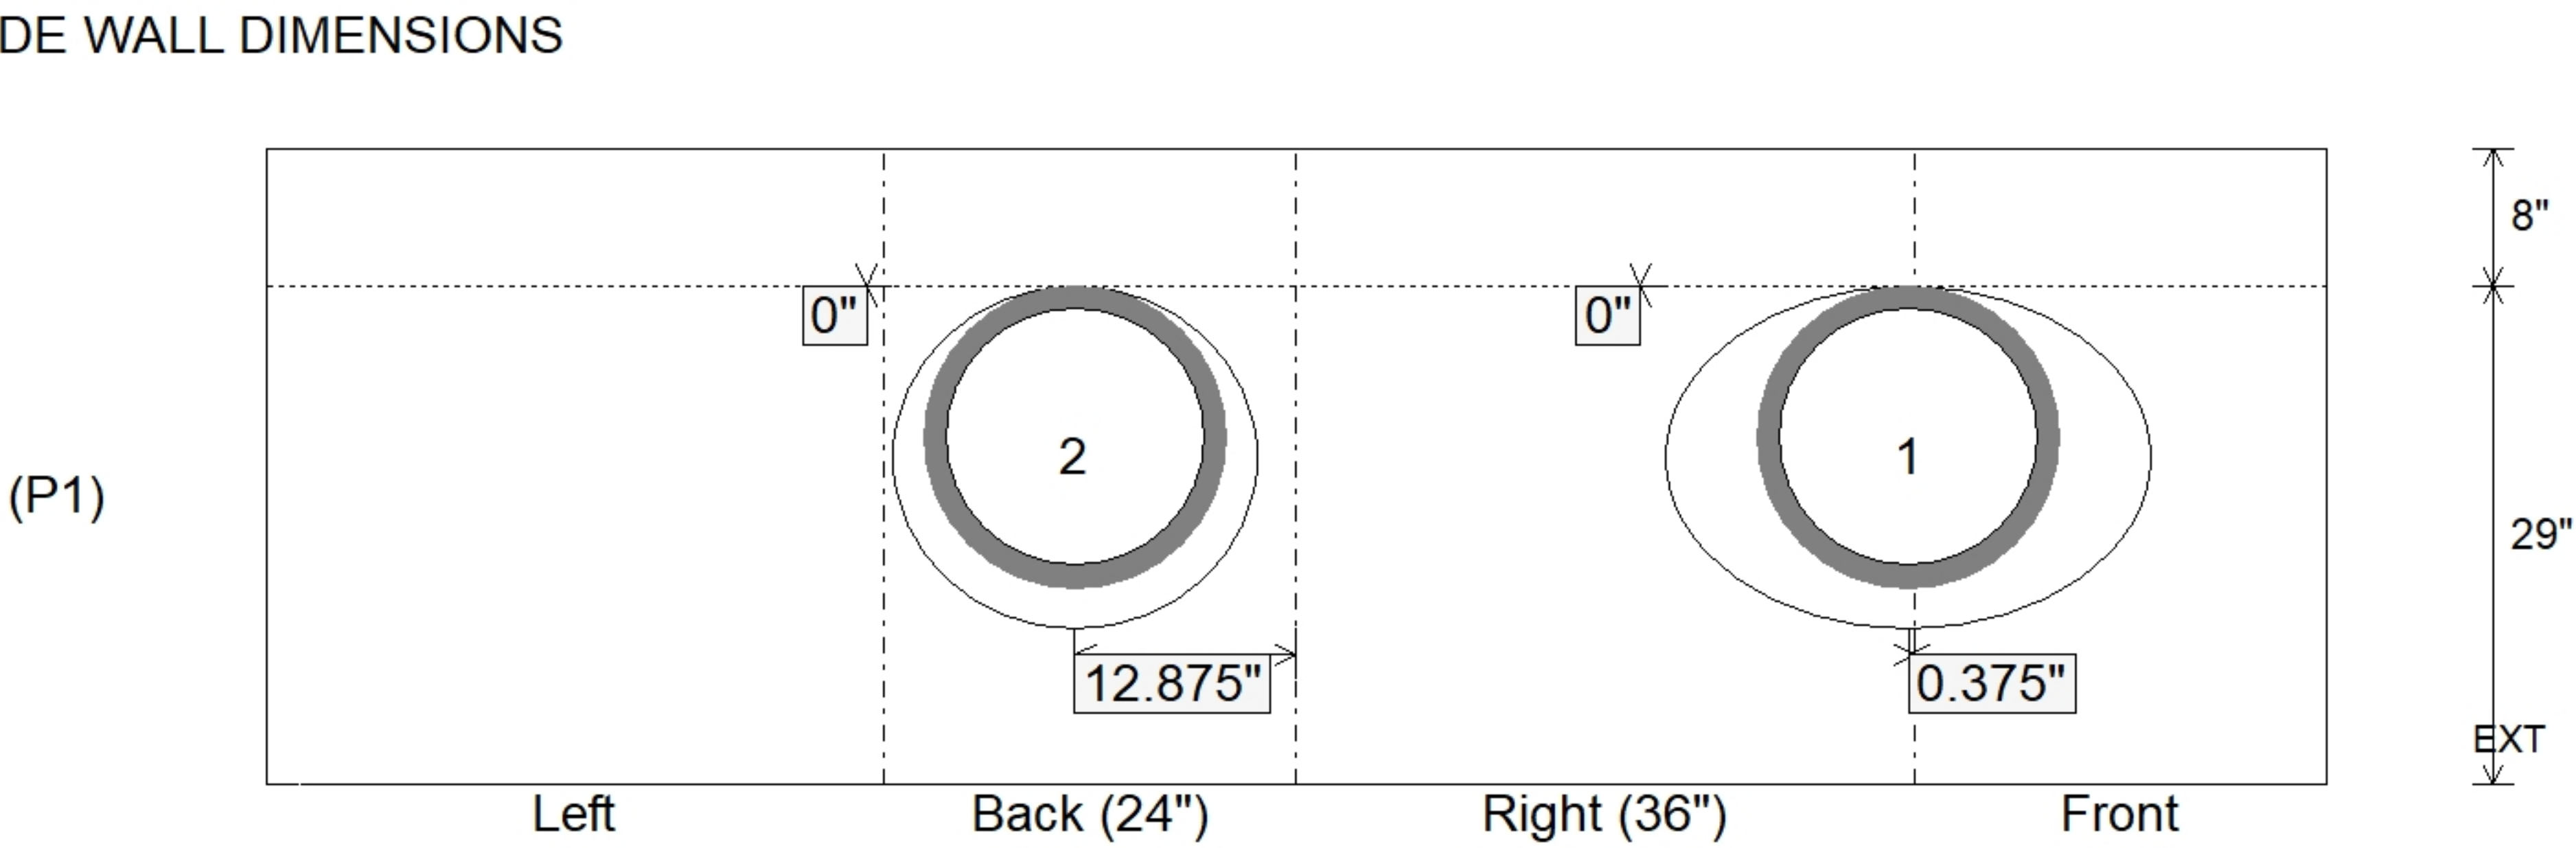


Job Name: 26-1852 - Oakland City CCMG Job Location: Oakland City, IN Contractor: SAMM Trucking & Excavating, Inc.						Plant: 100 7/15/2026 12:46:32 PM		Tech: J. Horsley PC: J. Jarvis			
Structure ID: QL4 INJ10 LT - Mill & Jackson Streets											
P1		BX2436-06W08F-BAVF				BOX BASE 6inW, 8inF, Variable Ht F/n					
P2) 24" x 36" - CASTING HEIGHT - 8" P1) 24" x 36" - BOX BASE 6inW, 8inF, Variable Ht F/n - 29" 1) 24" x 36" - SGL 1"x14.5' Butyl 2) Hole - 20						0 lb 2870 lb 0 lb 0 lb ----- 2870 lb		Structure Notes: 1. INDOT INLET TYPE J / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING (HOE R-3827-10V F/G/H) SUPPLIED BY ICAST. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 3'		Rim to Invert: 3'		Slack: 0.296"		Sump: 1.296"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	0'	45°	0.375"	15" HDPE	17.6"	Hole 20	20"	14.485", 13.799"	0"	-4"	
Invert 2	0'	160°	16.75"	15" HDPE	17.6"	Hole 20	20"	21.284"	0"	7"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
						RIGHT-SIDE UP VIEW (int. dimensions)			UPSIDE-DOWN VIEW (int. dimensions)		
											
						INSIDE WALL DIMENSIONS					
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 6" Floor Height: 8"		Height (Int): 29" Height (Ext): 37"		Weight (Net): 2870 lb Volume (Net): 0.73cu.yd		