

Contractor: RD Sitework LLC

TECH: Jared - F

Plant: 100



Size: 48"

Rim to Invert: 5'

Floor Height: 6"

Slack: 0"


REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.


1) CASTING - HOE 525 SET FLAT GRATE (F/G/H)
1) 48" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
2) Hole - 26

0 lb
1300 lb
3798 lb
442 lb
0 lb
0 lb
0 lb


Structure Total: 5540 lb

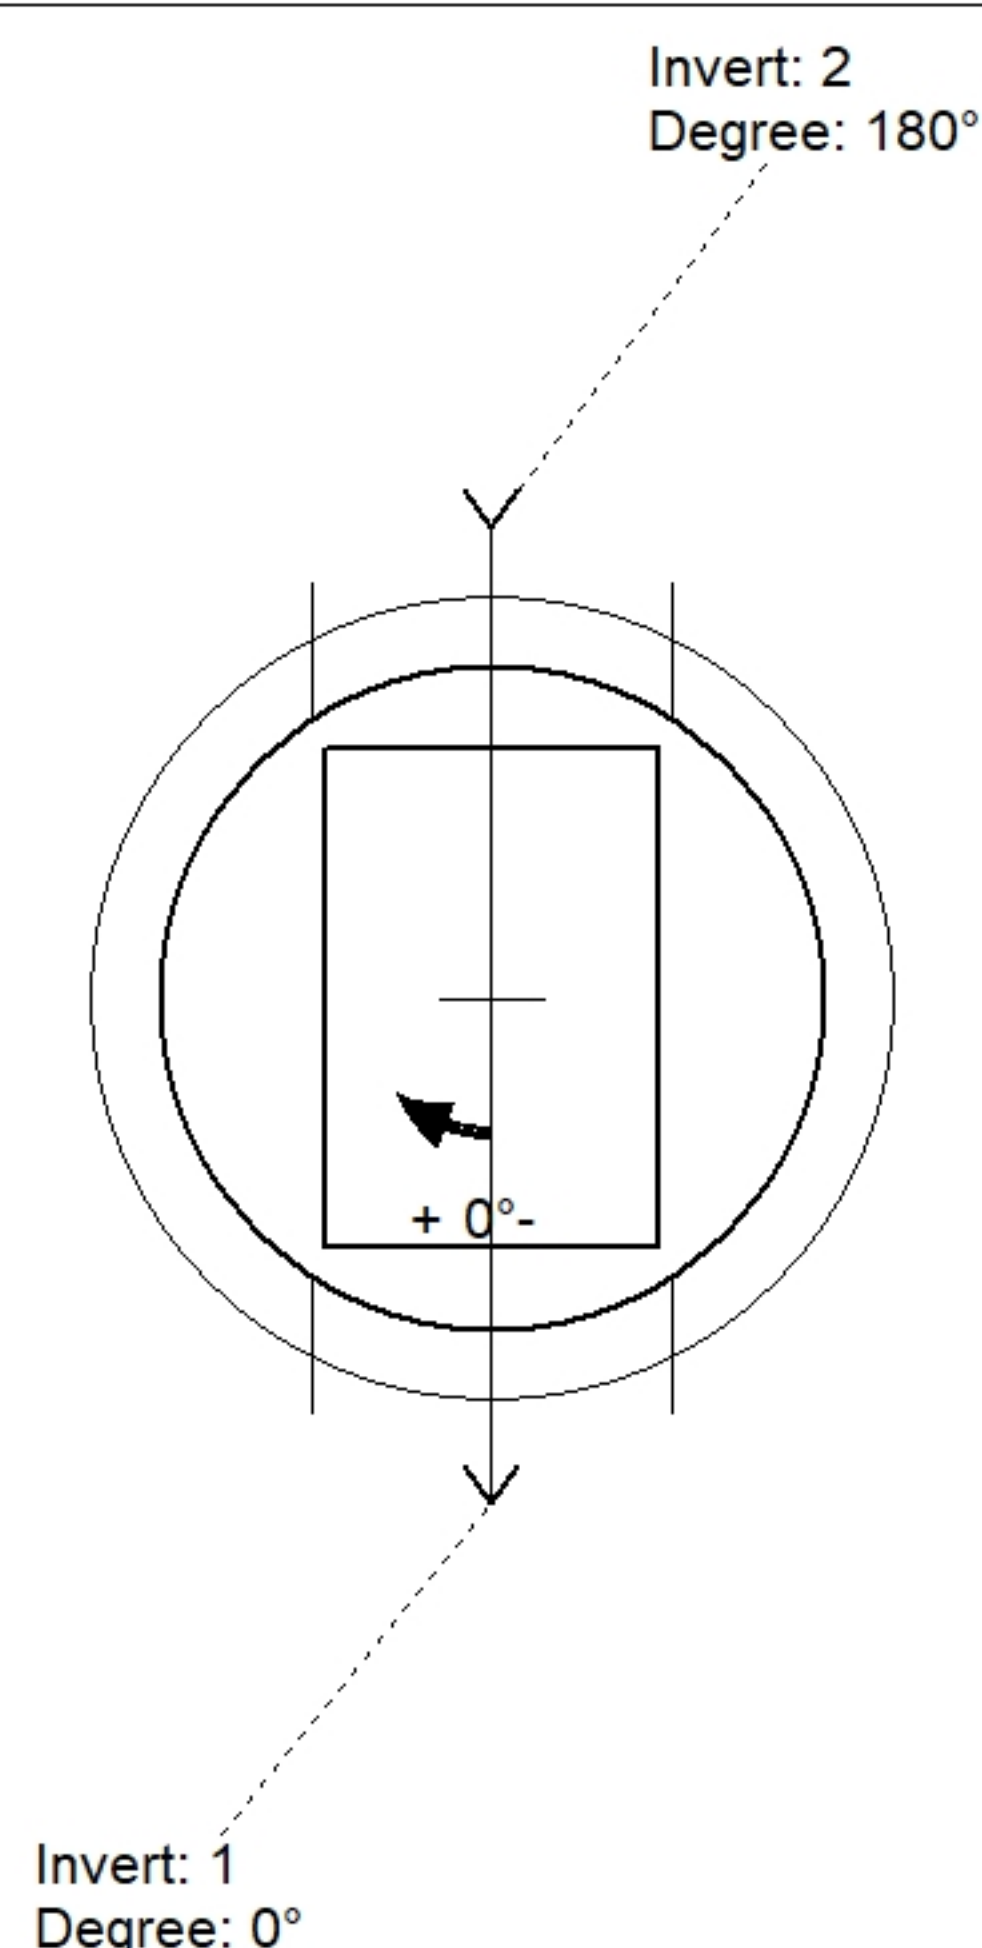

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	689.93'							
Reducer								
Invert 1	684.93'	0°	18" RCP B WALL	23"	26"	Hole 26	-2.5"	P1
Invert 2	684.93'	180°	18" RCP B WALL	23"	26"	Hole 26	-2.5"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

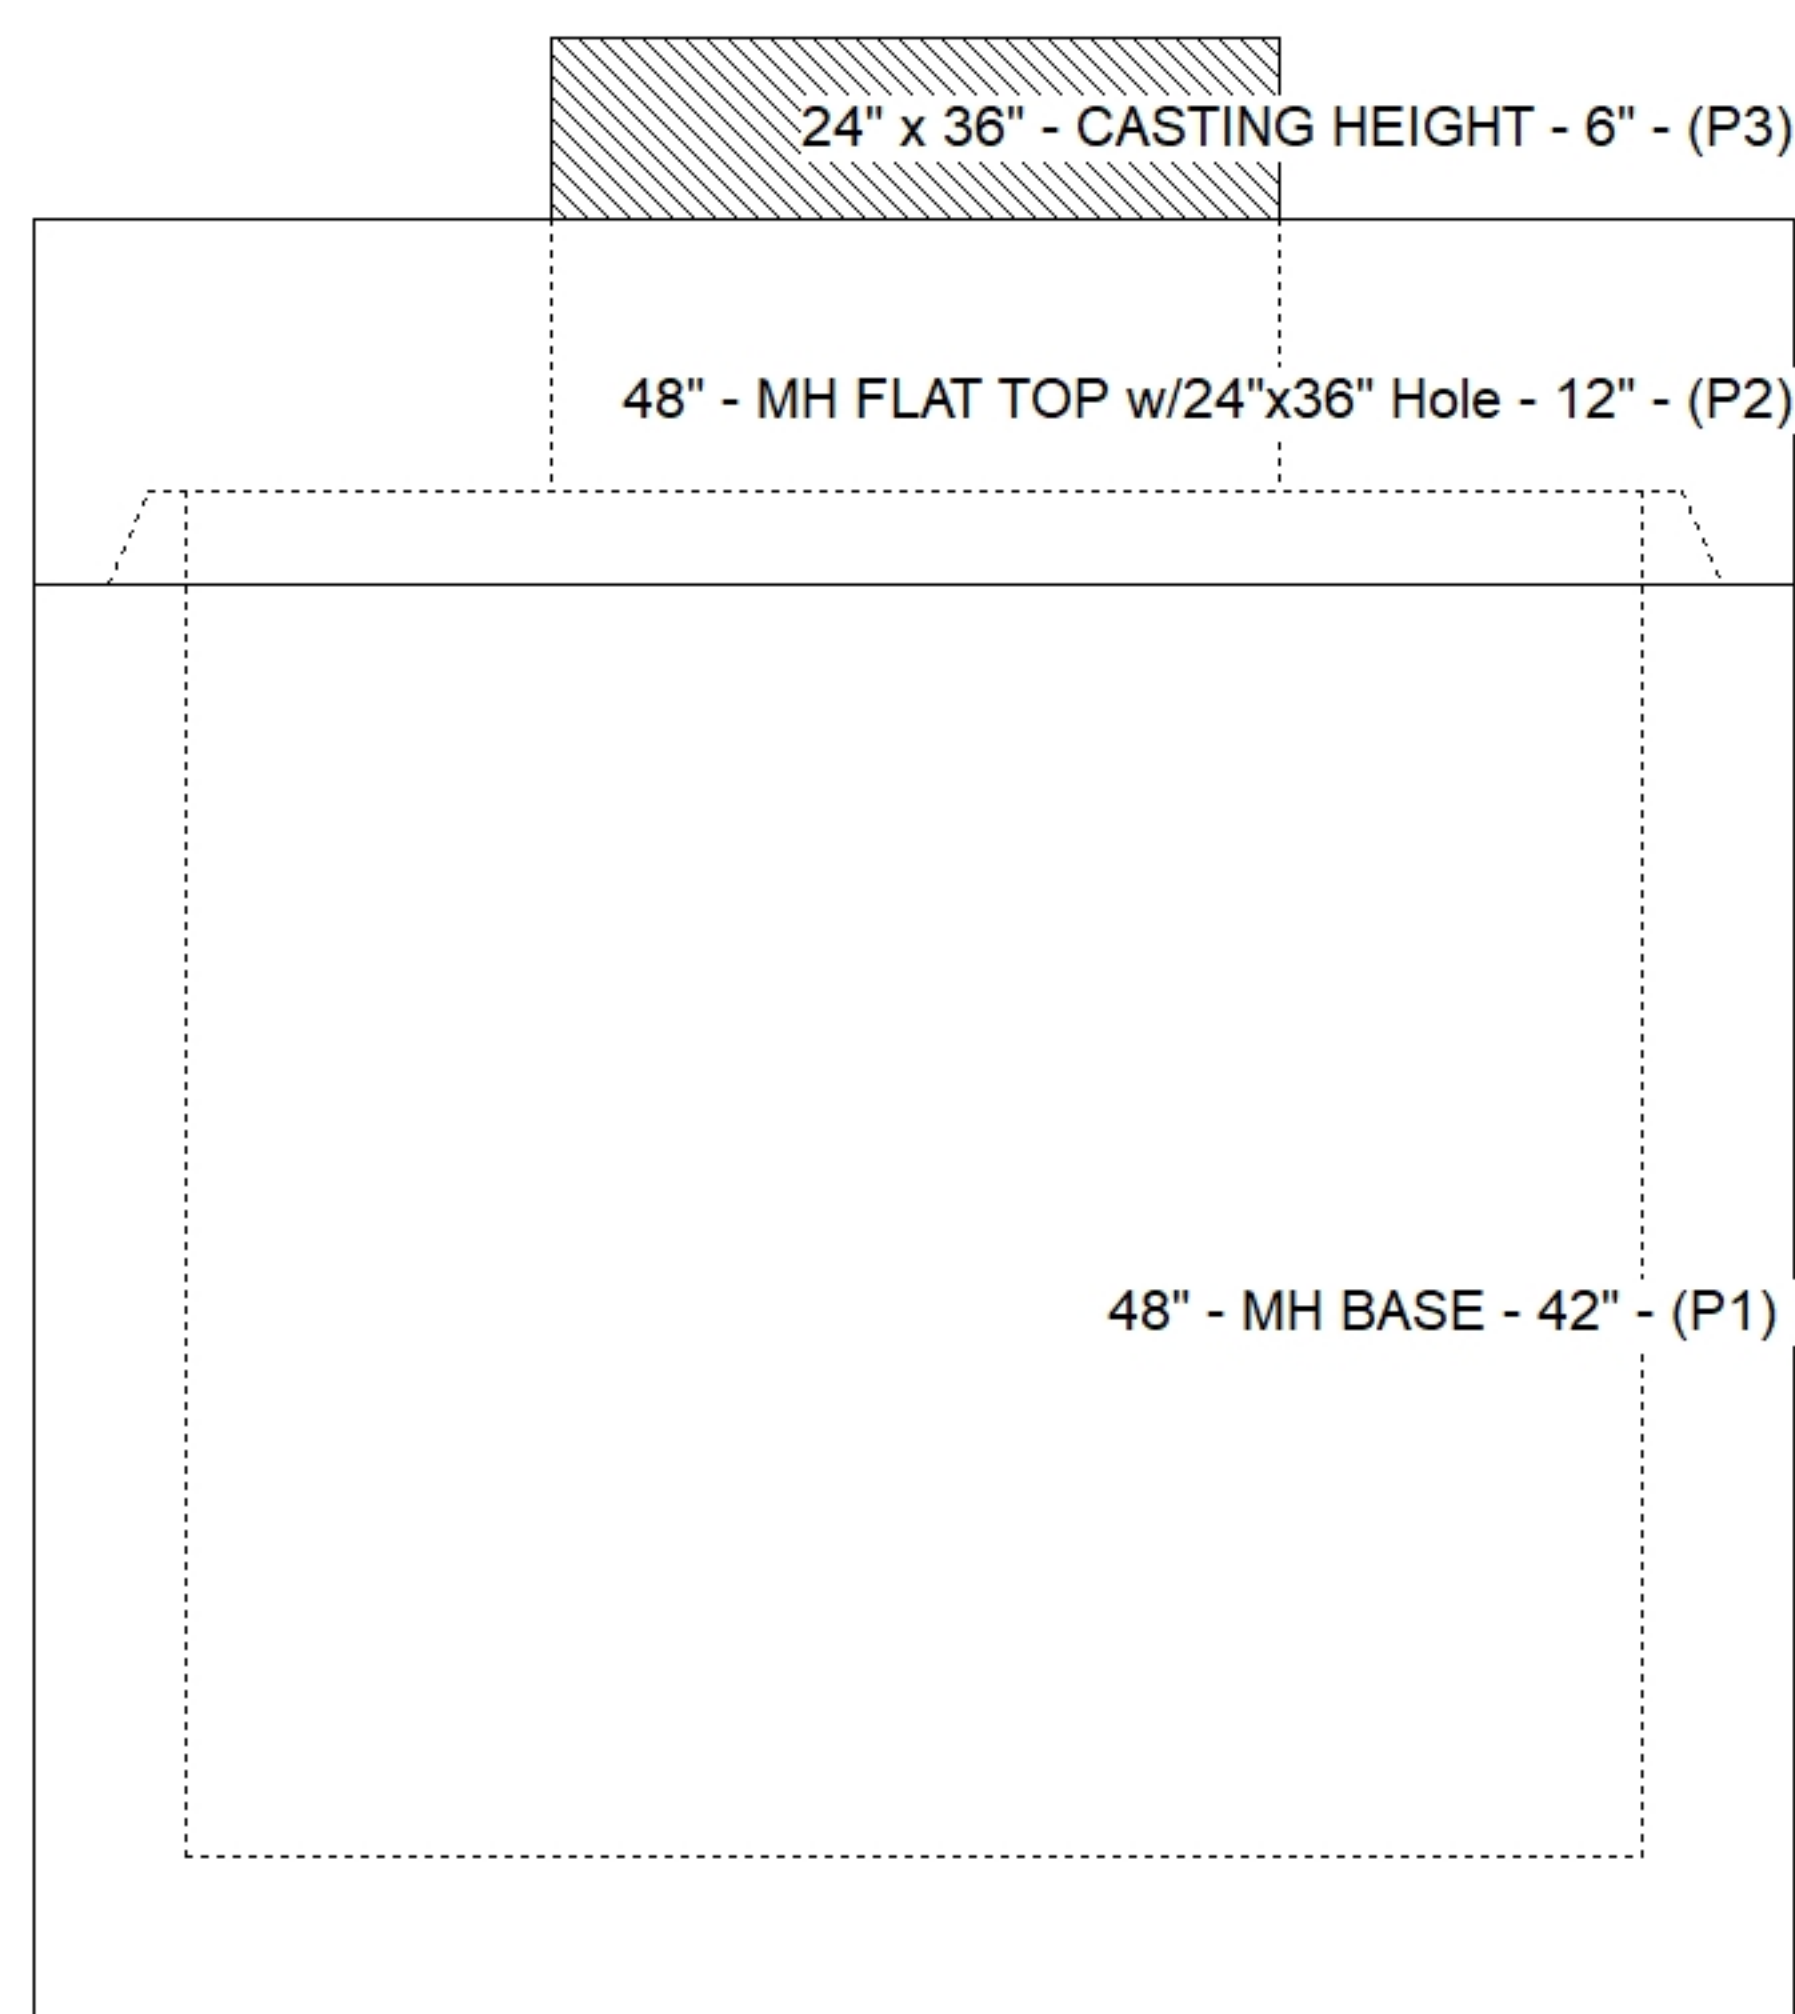

Default - Interior Dimensions

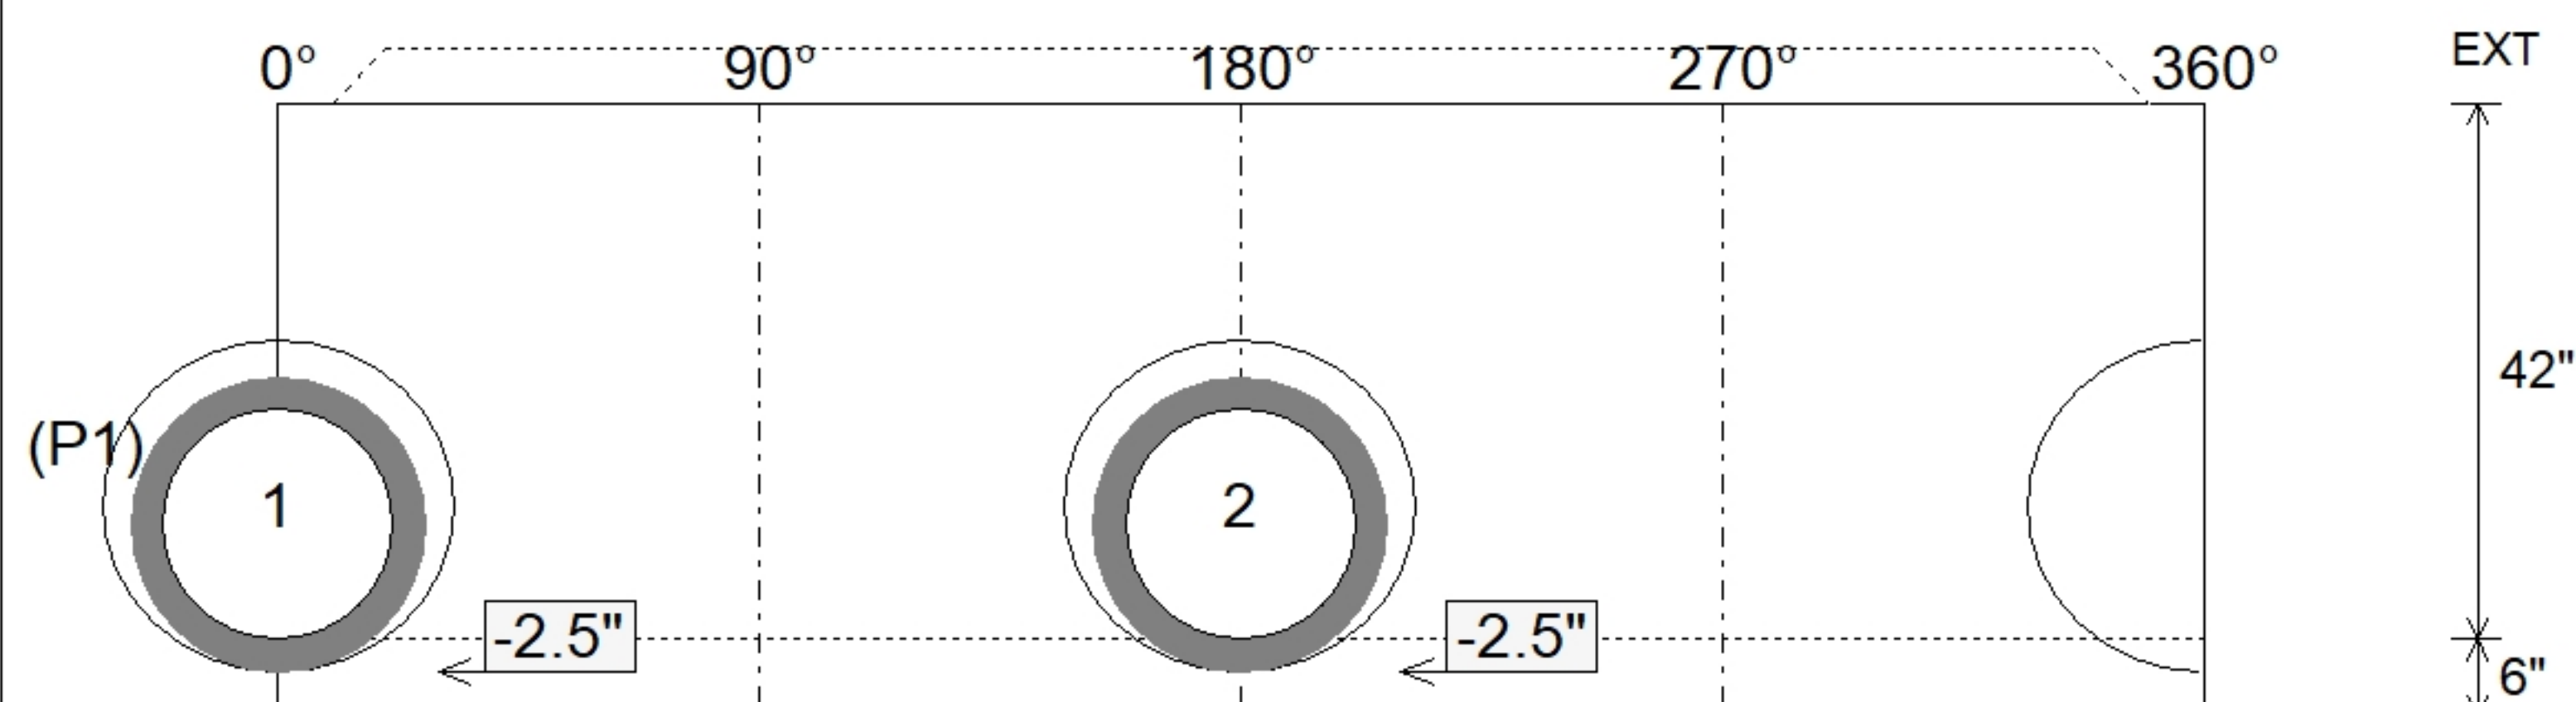

Submittal Drawing
6/8/2026 12:38:56 PM

SUBMITTAL
APPROVED BY: