

Job Name: 26-1899 - Gateway 65 Industrial Road
 Job Location: Franklin, KY
 Contractor: RD Sitework LLC

Plant: 100
 4/20/2026 1:53:55 PM

Tech: Jared - F
 PC: E. Bardley




Structure ID: 40 HW

P1 HWPC36


36" - PIPE CULVERT HEADWALL F/F

DIMENSIONS									
PIPE Ø	A	B	C	D	E	F	G	H	WEIGHT
36"	6'-0"	6'-0"	6'-0"	1'-0"	5'-0"	3'-0"	11'-0"	3'-0"	6,820 lbs.
42"	6'-0"	6'-0"	6'-0"	1'-0"	5'-0"	3'-0"	11'-0"	3'-0"	6,820 lbs.
48"	6'-0"	6'-0"	6'-0"	1'-0"	5'-0"	3'-0"	11'-0"	3'-0"	13,233 lbs.
54"	6'-0"	6'-0"	6'-0"	1'-0"	5'-0"	3'-0"	11'-0"	3'-0"	13,233 lbs.
60"	7'-0"	7'-0"	6'-0"	2'-0"	7'-0"	3'-0"	13'-0"	6'-0"	18,422 lbs.
66"	7'-0"	7'-0"	6'-0"	2'-0"	7'-0"	3'-0"	13'-0"	6'-0"	18,422 lbs.

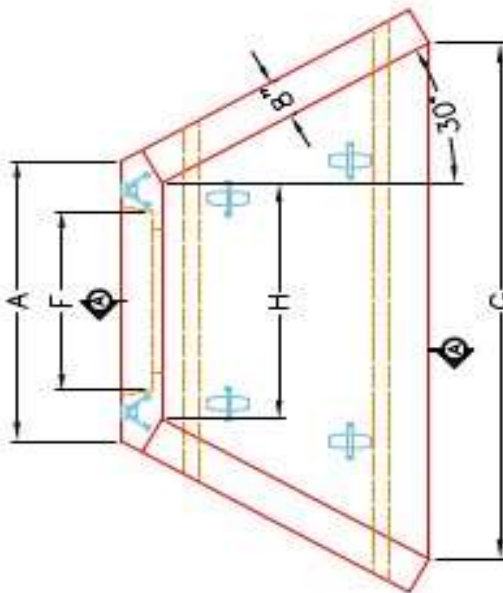


PLAN VIEW

"A"-ANCHOR LIFTING SYSTEM FOR PLANT & FIELD HANDLING.

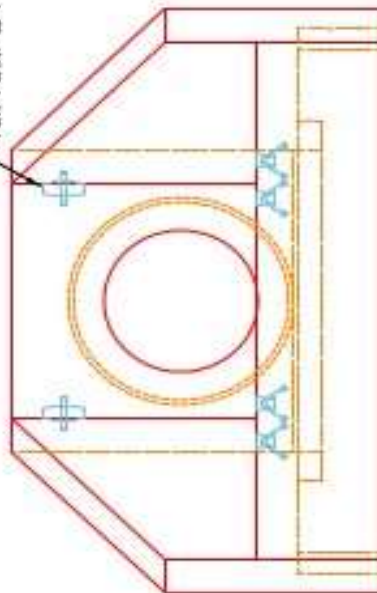


FRONT ELEVATION

ISOMETRIC VIEW

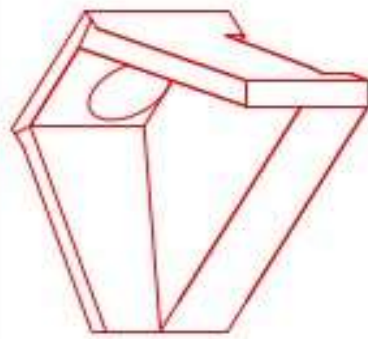

STEPPED HOLE FORMER FOR CORRESPONDING PIPE Ø.
 (PIPE O.D. + 3" - 4")

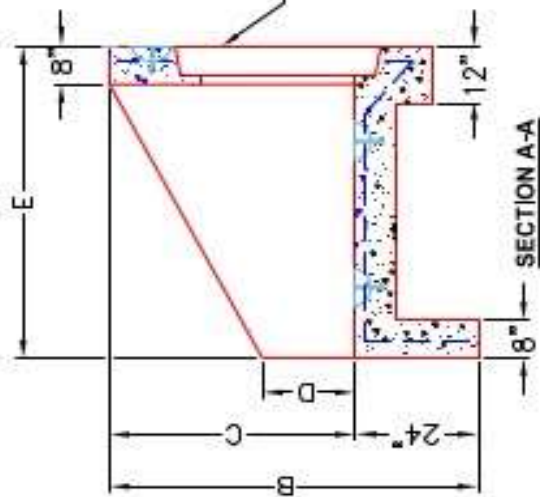

SECTION A-A

NOTES:

1. CONCRETE: KYTC APPROVED.
2. REINFORCING: #5 BAR @ 12" C/C E.W. - GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-110-02, RDH-210-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. 3" CHAMFER ON ALL EXPOSED EDGES.
7. PREFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3" - 4".

APPROVED FOR DESIGN ONLY

APPROVED

AS PER SPECIFICATION 1102

KYTC ON OF CONSTRUCTION

BY: _____

DATE: 1/20/2021 9:50 am

INSTRUCTION

INFRASTRUCTURE PRECAST, INC.
 601 WEST 7TH ST., MANASSAS, VA 20108
 PHONE: (703) 338-0228, FAX: (703) 338-0400

KYTC 30" - 80" PIPE CULVERT HEADWALL

DRAWING NO. ITPC-110-02 DATED 12-14-20
 DESIGNED BY: J.H. RUSSELL, INC. DRAWN BY: N. RICHARDS
 WEB: WWW.ICASTING.COM SCALE: 1/8"