

Contractor: RD Sitework LLC


TECH: Jared - F

Plant: 100




Slack: 0.92"


Structure Total:	5174 lb
------------------	---------

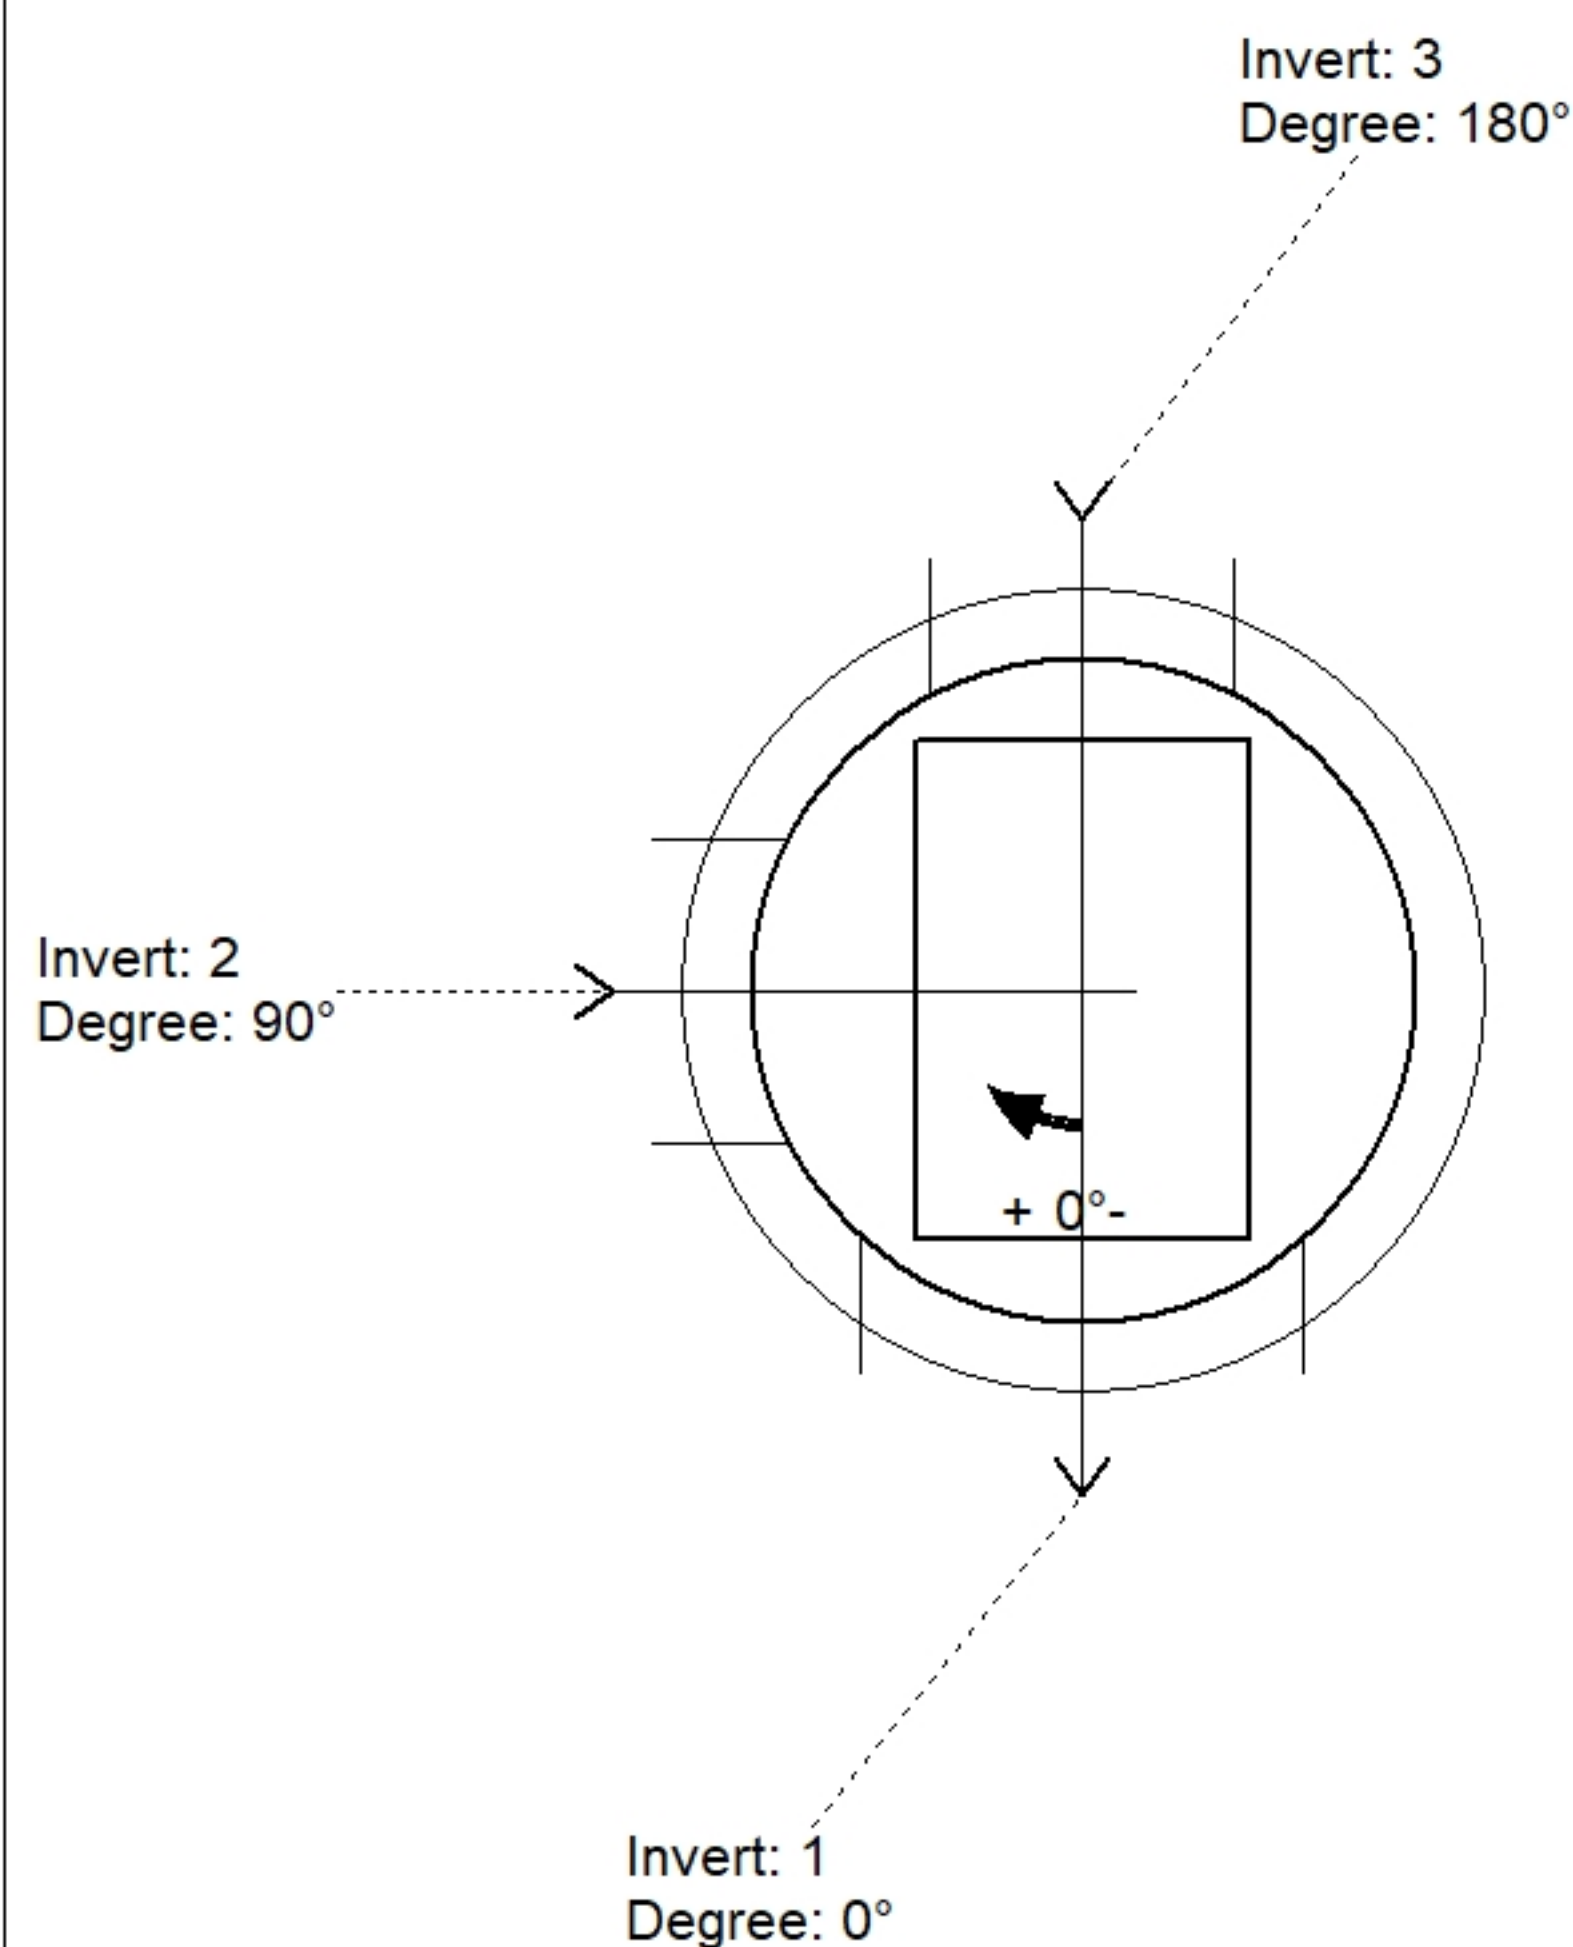

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	695.29'							
Reducer								
Invert 1	690.63'	0°	24" RCP B WALL	30"	32"	Hole 32	0"	P1
Invert 2	690.63'	90°	15" RCP B WALL	19.5"	22"	Hole 22	0.75"	P1
Invert 3	690.63'	180°	15" RCP B WALL	19.5"	22"	Hole 22	0.75"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

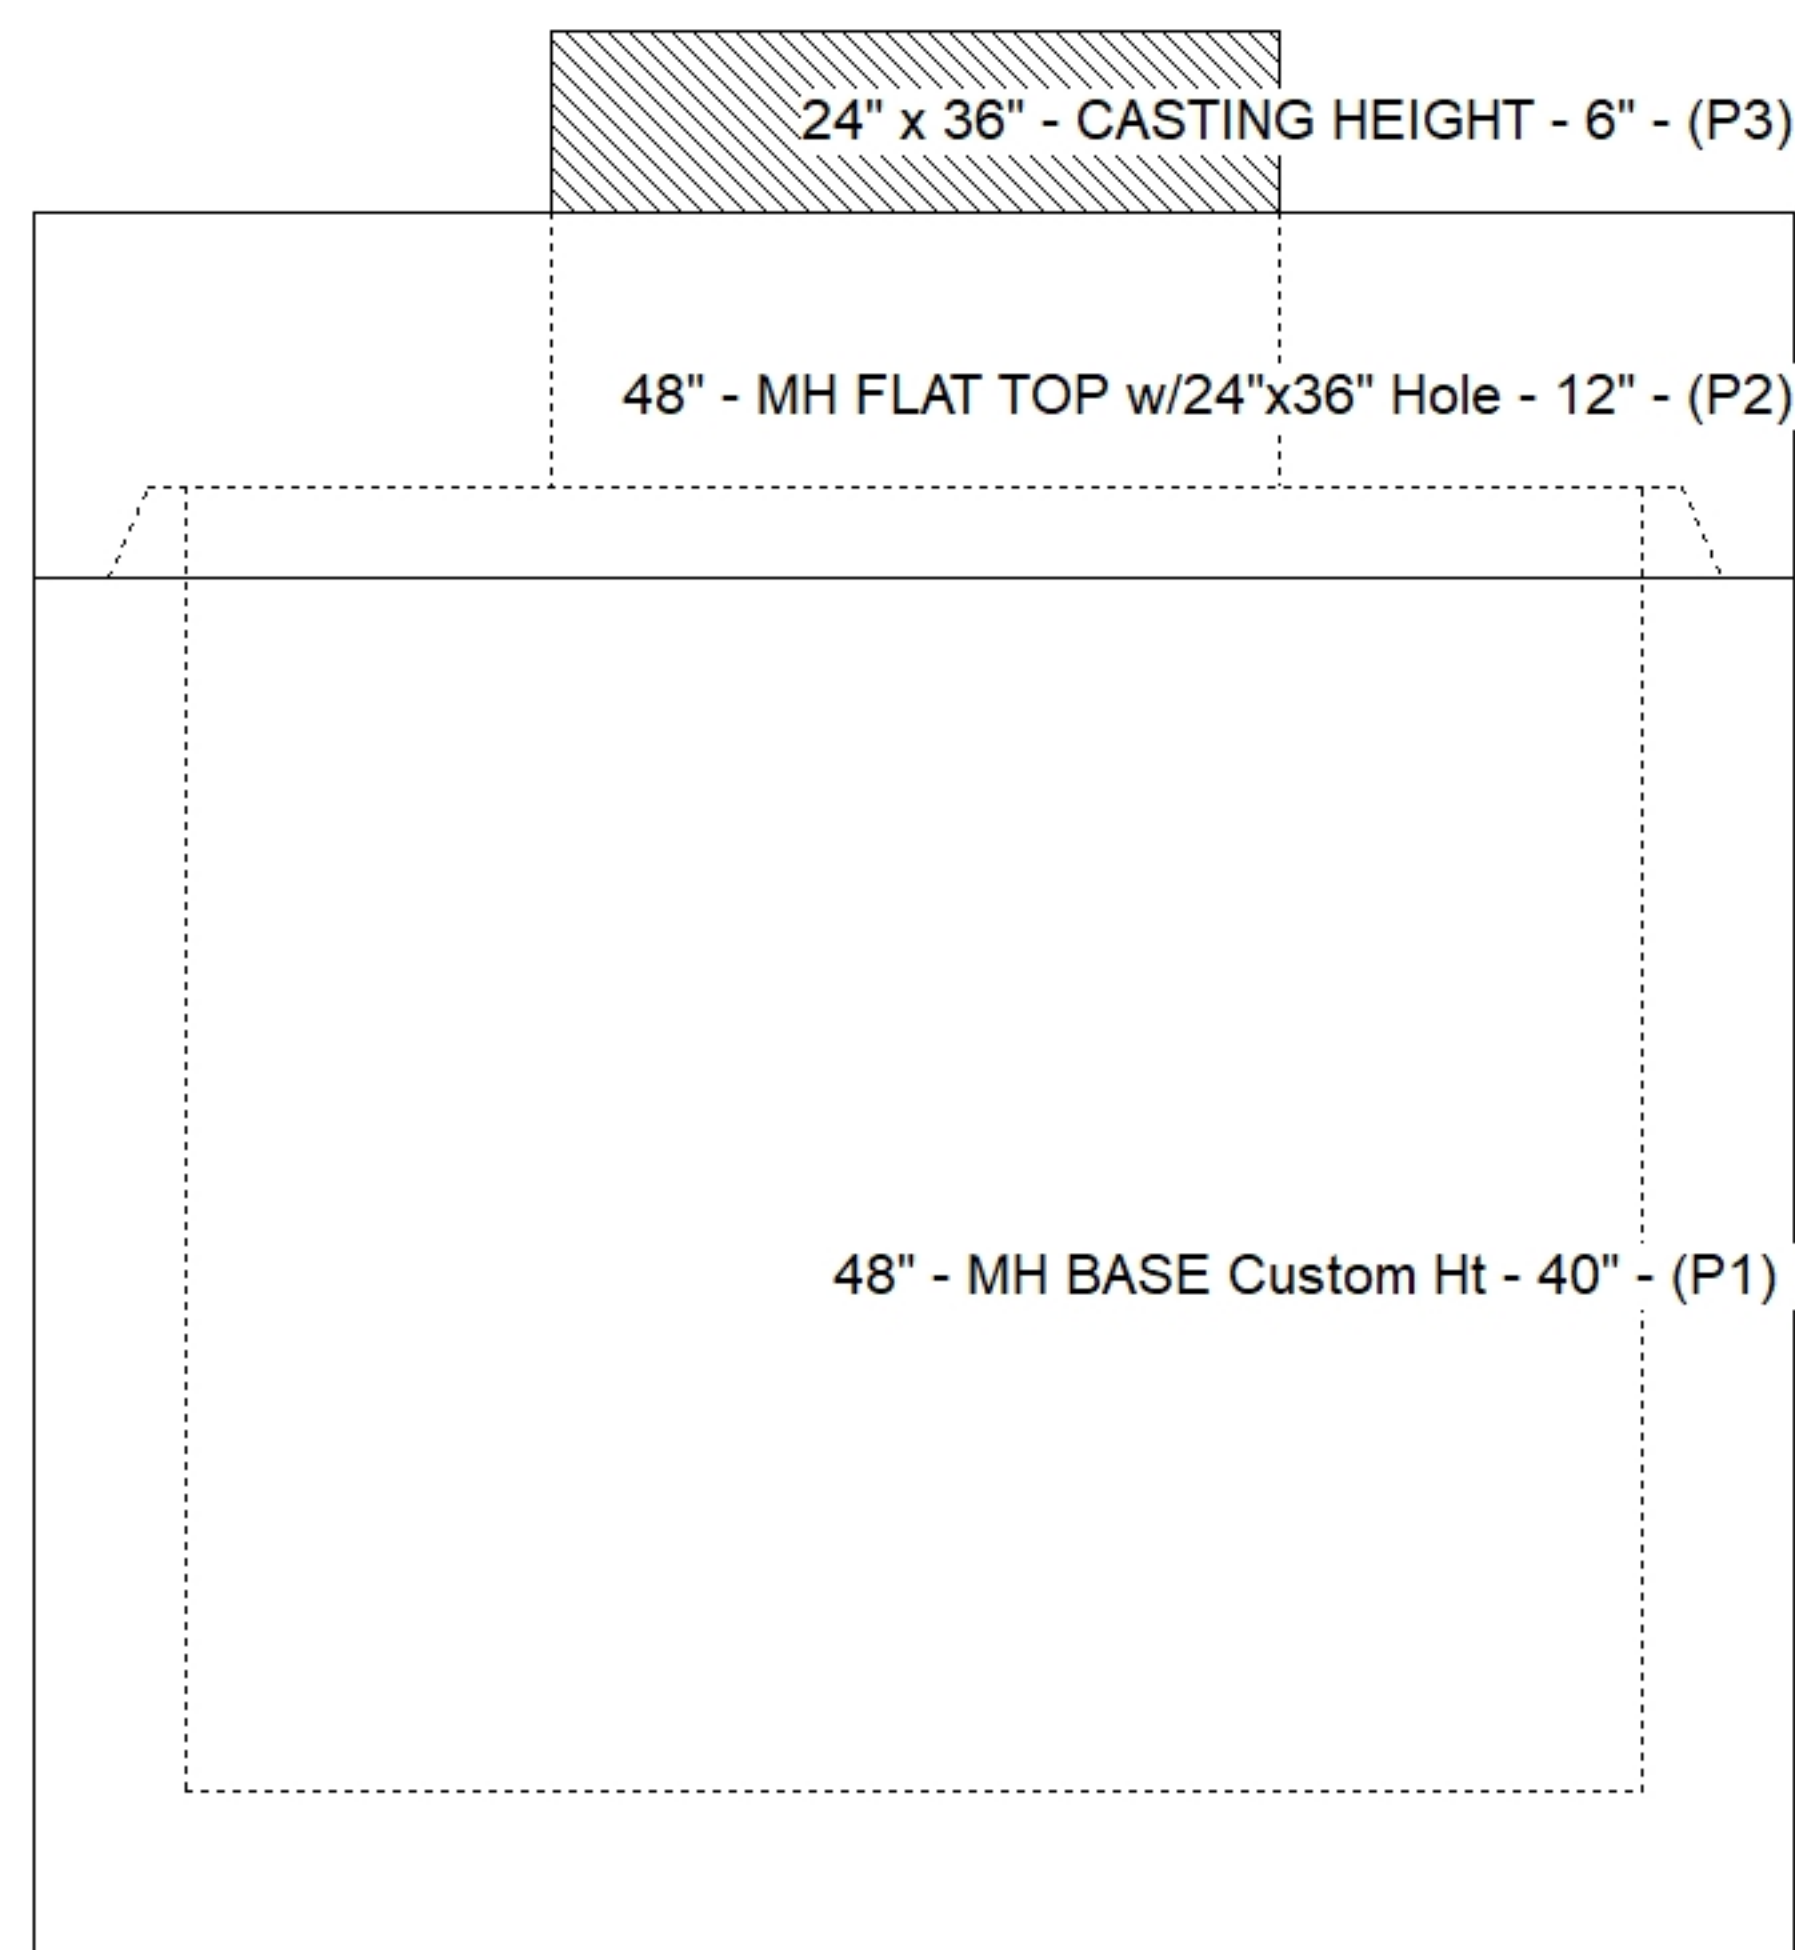

Default - Interior Dimensions

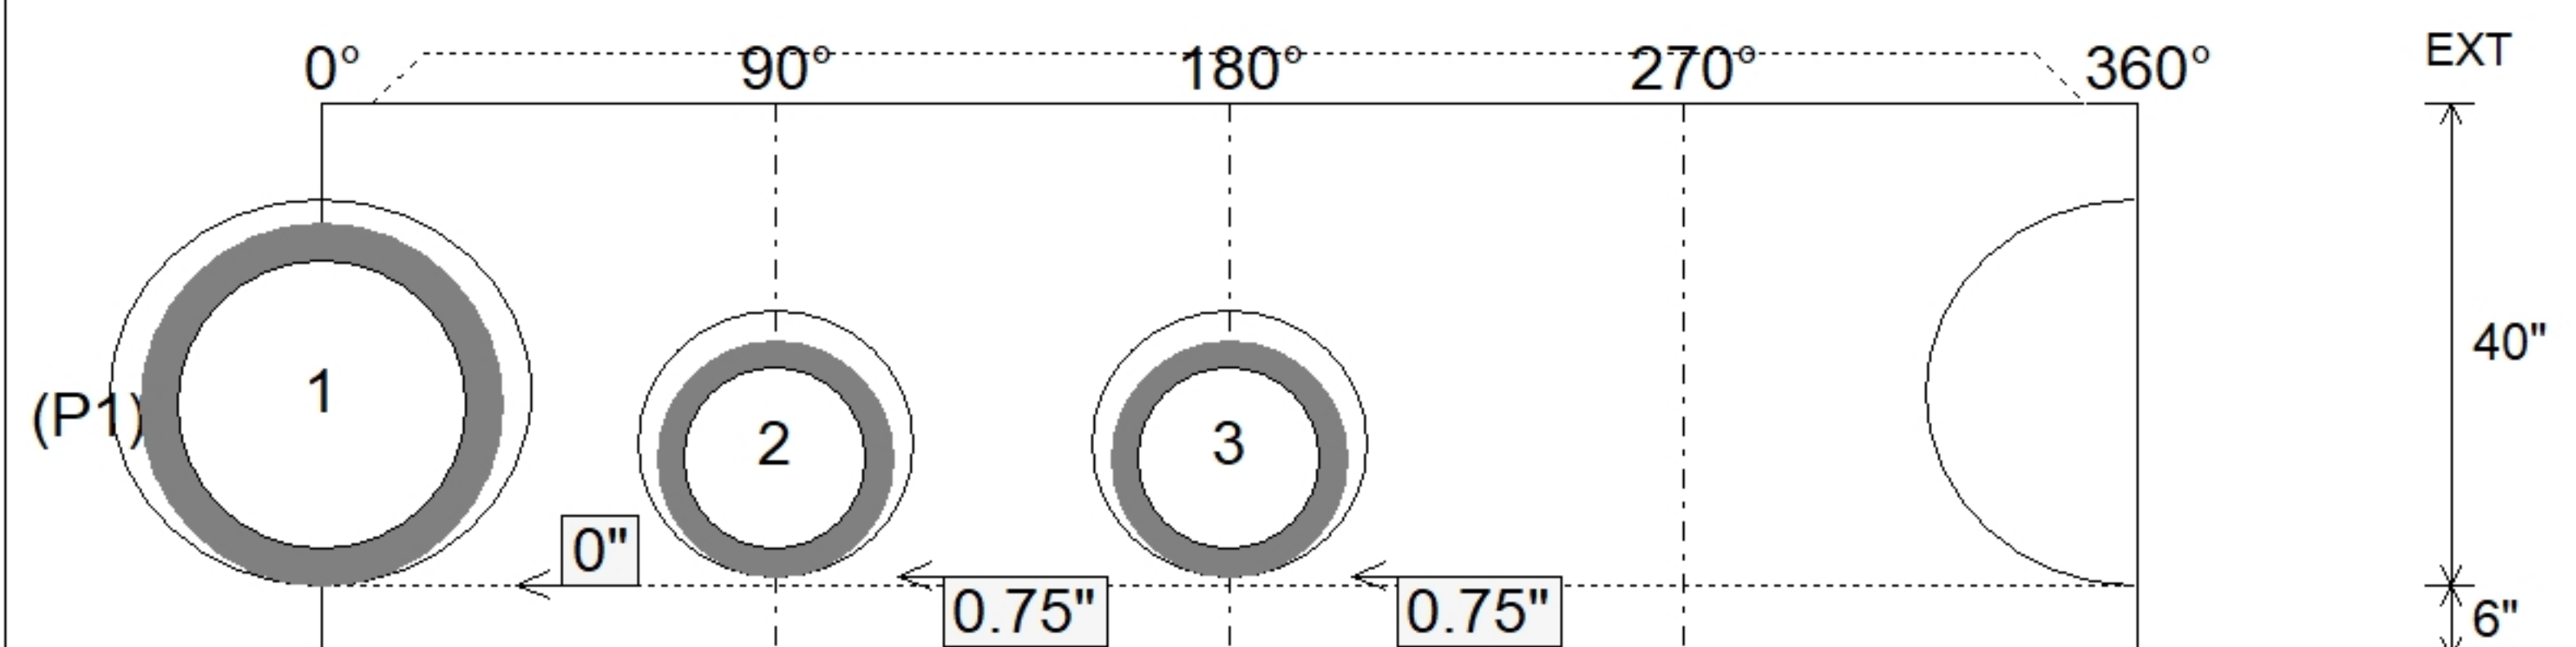

SUBMITTAL
APPROVED BY: