


Contractor: RD Sitework LLC

Plant: 100




Slack: 0.92"


Structure Total: 5582 lb

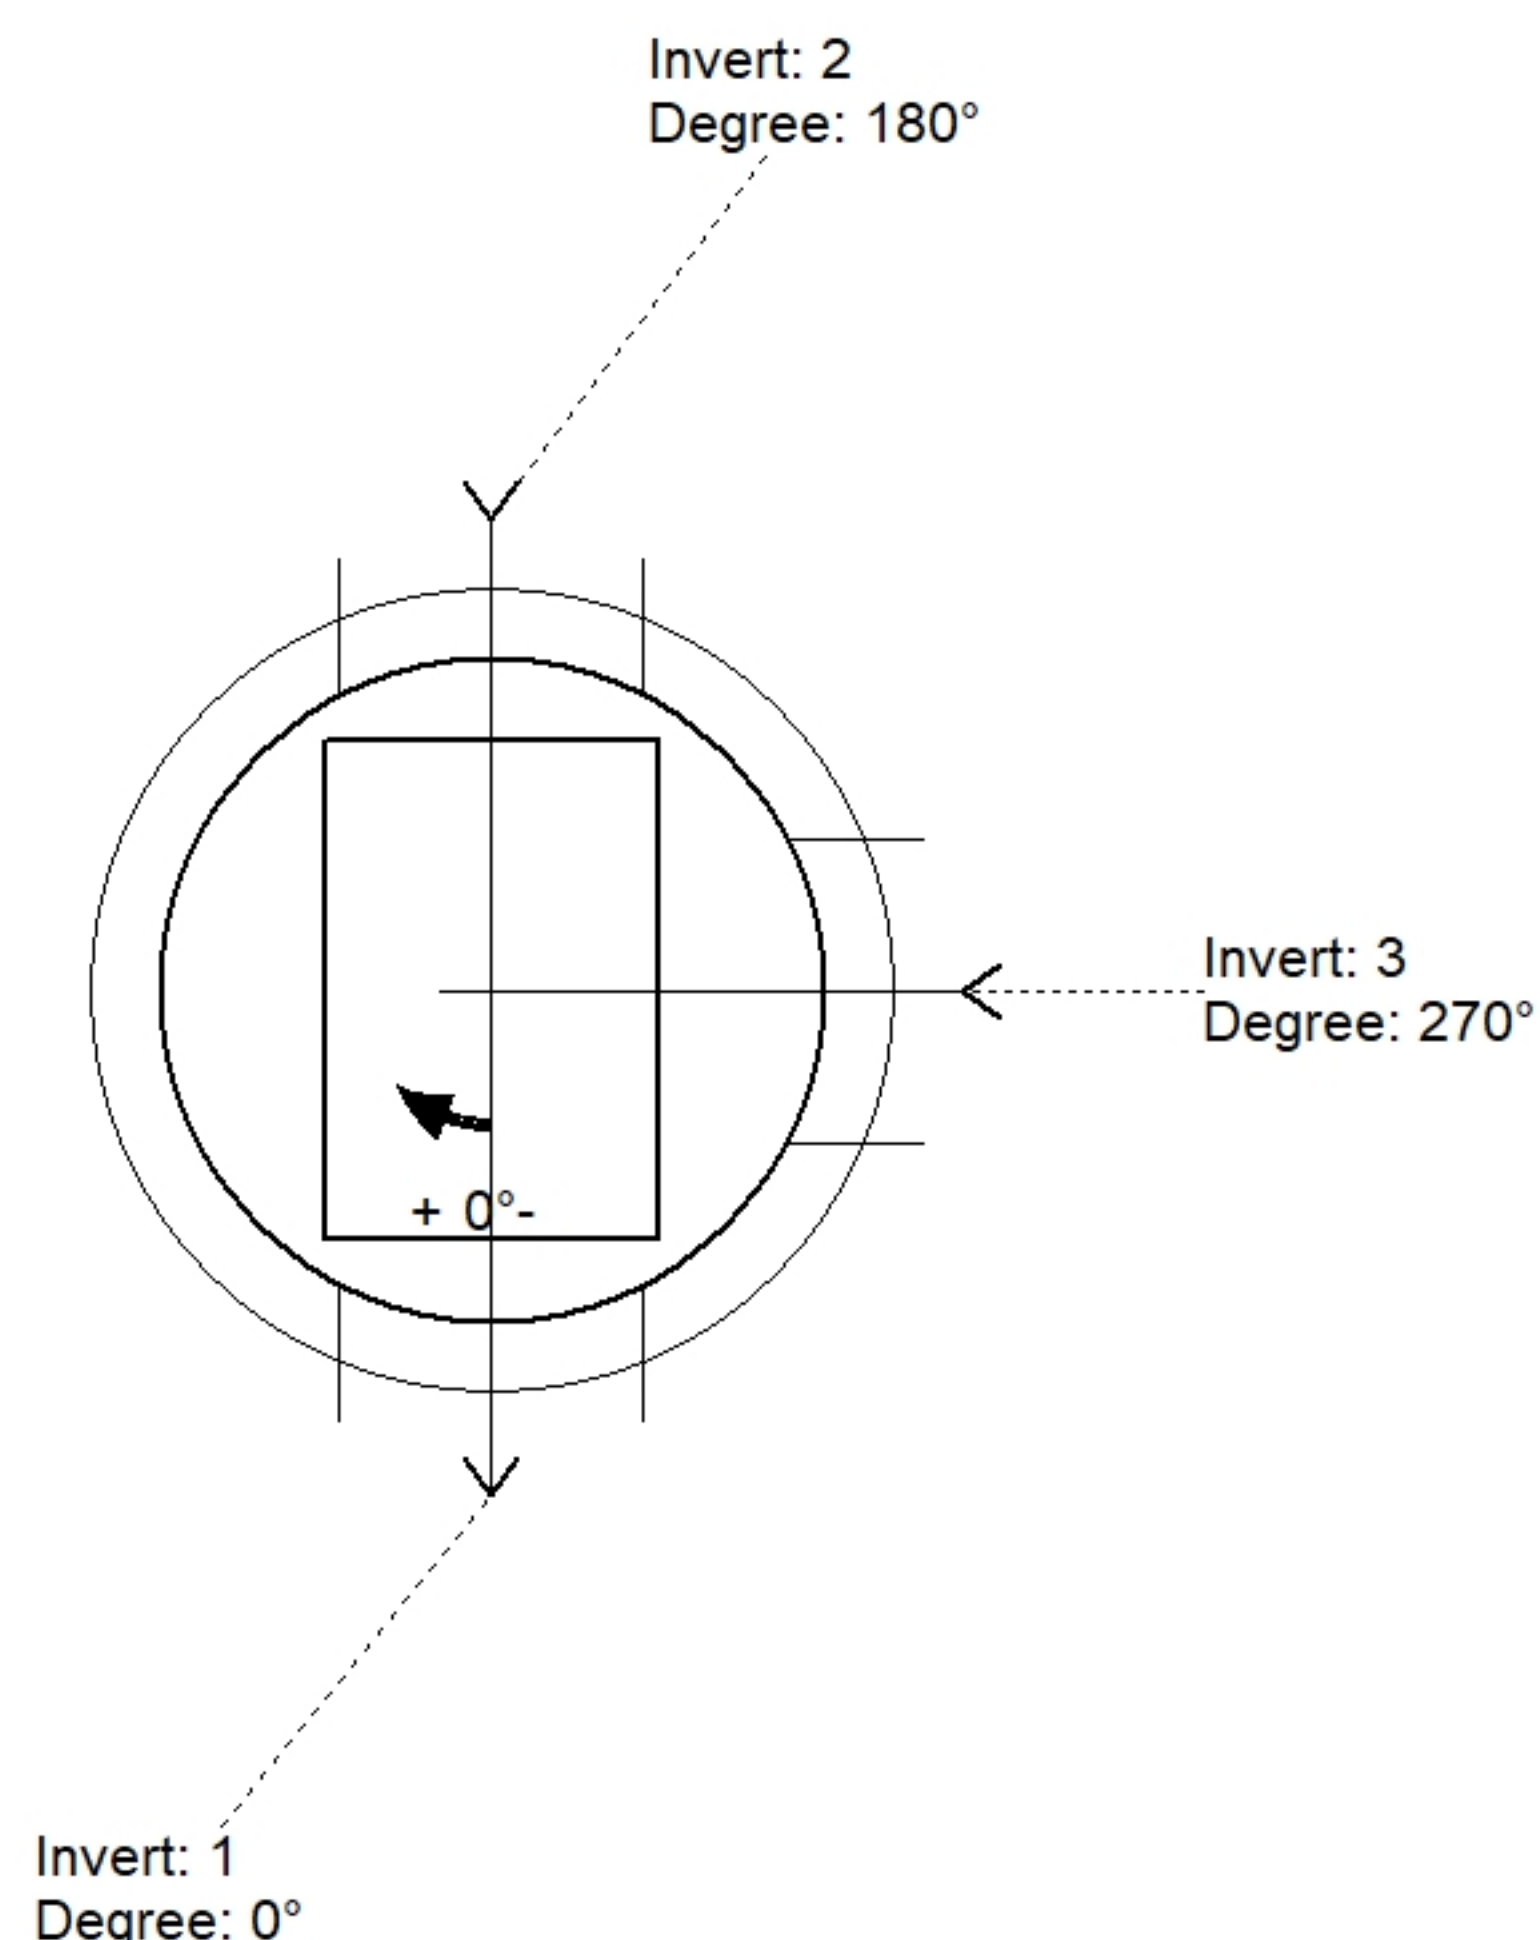

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	683.06'							
Reducer								
Invert 1	677.9'	0°	15" RCP B WALL	19.5"	22"	Hole 22	-2.25"	P1
Invert 2	677.9'	180°	15" RCP B WALL	19.5"	22"	Hole 22	-2.25"	P1
Invert 3	677.9'	270°	15" RCP B WALL	19.5"	22"	Hole 22	-2.25"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

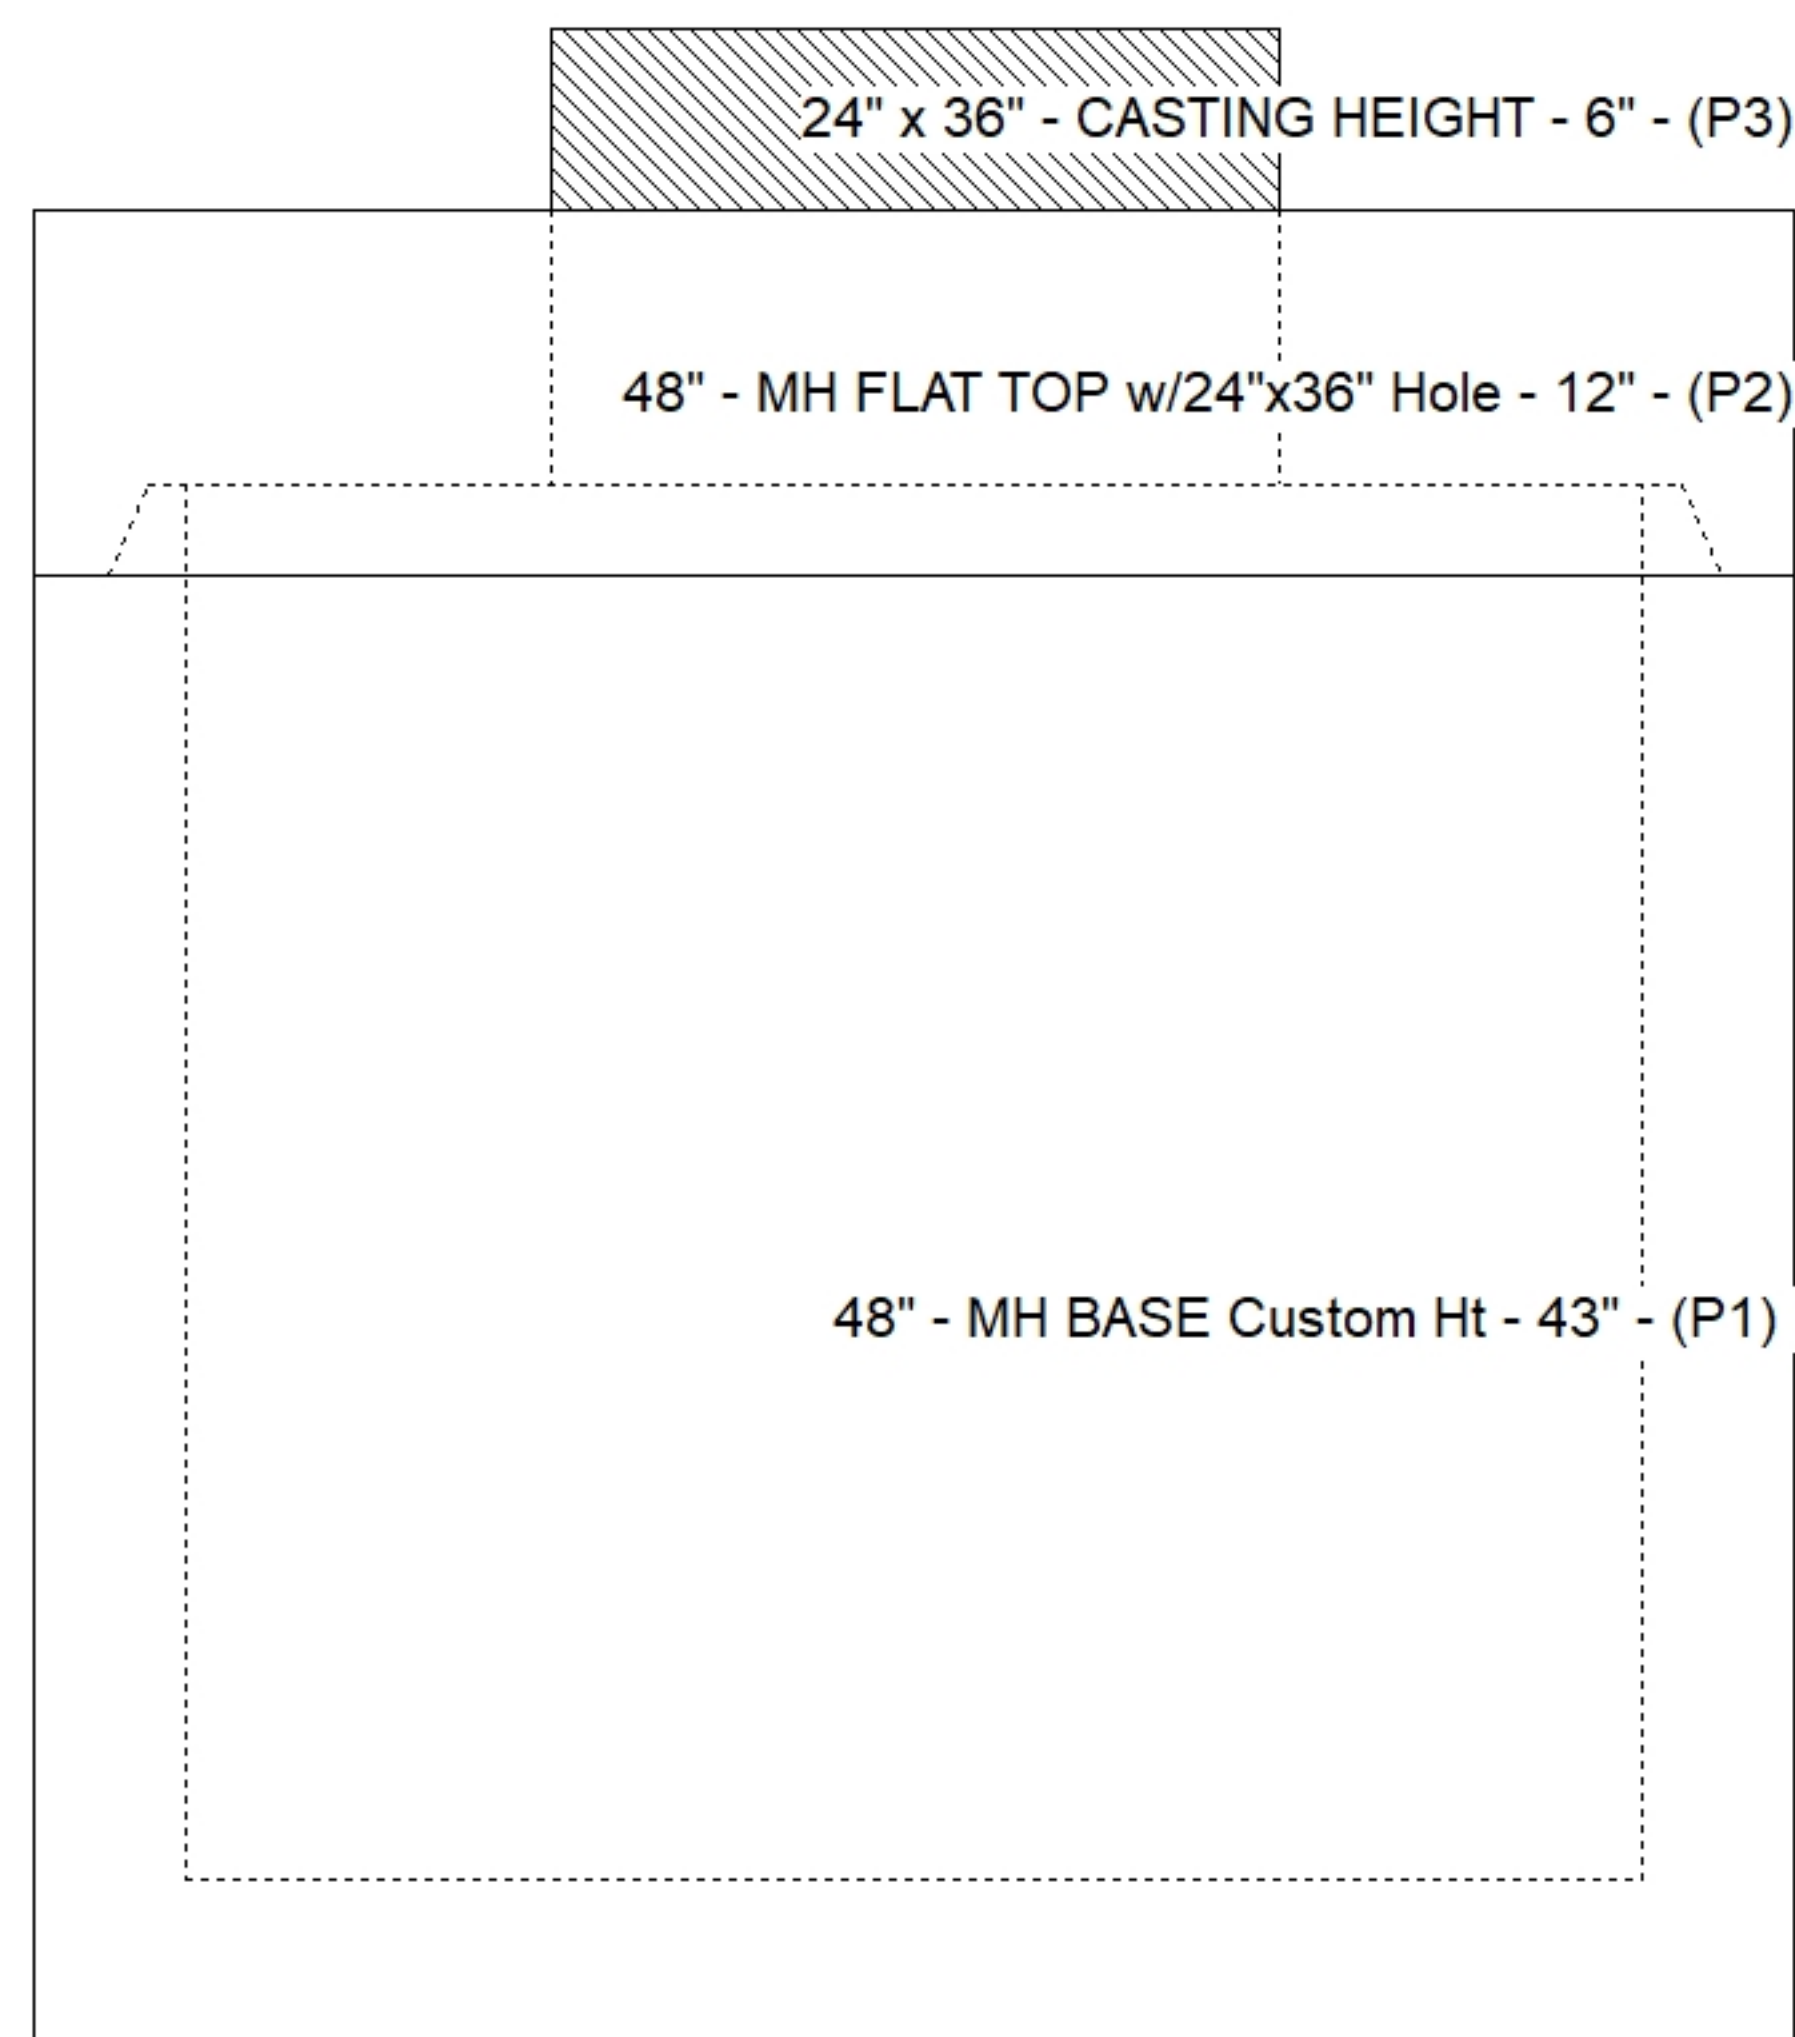

Default - Interior Dimensions

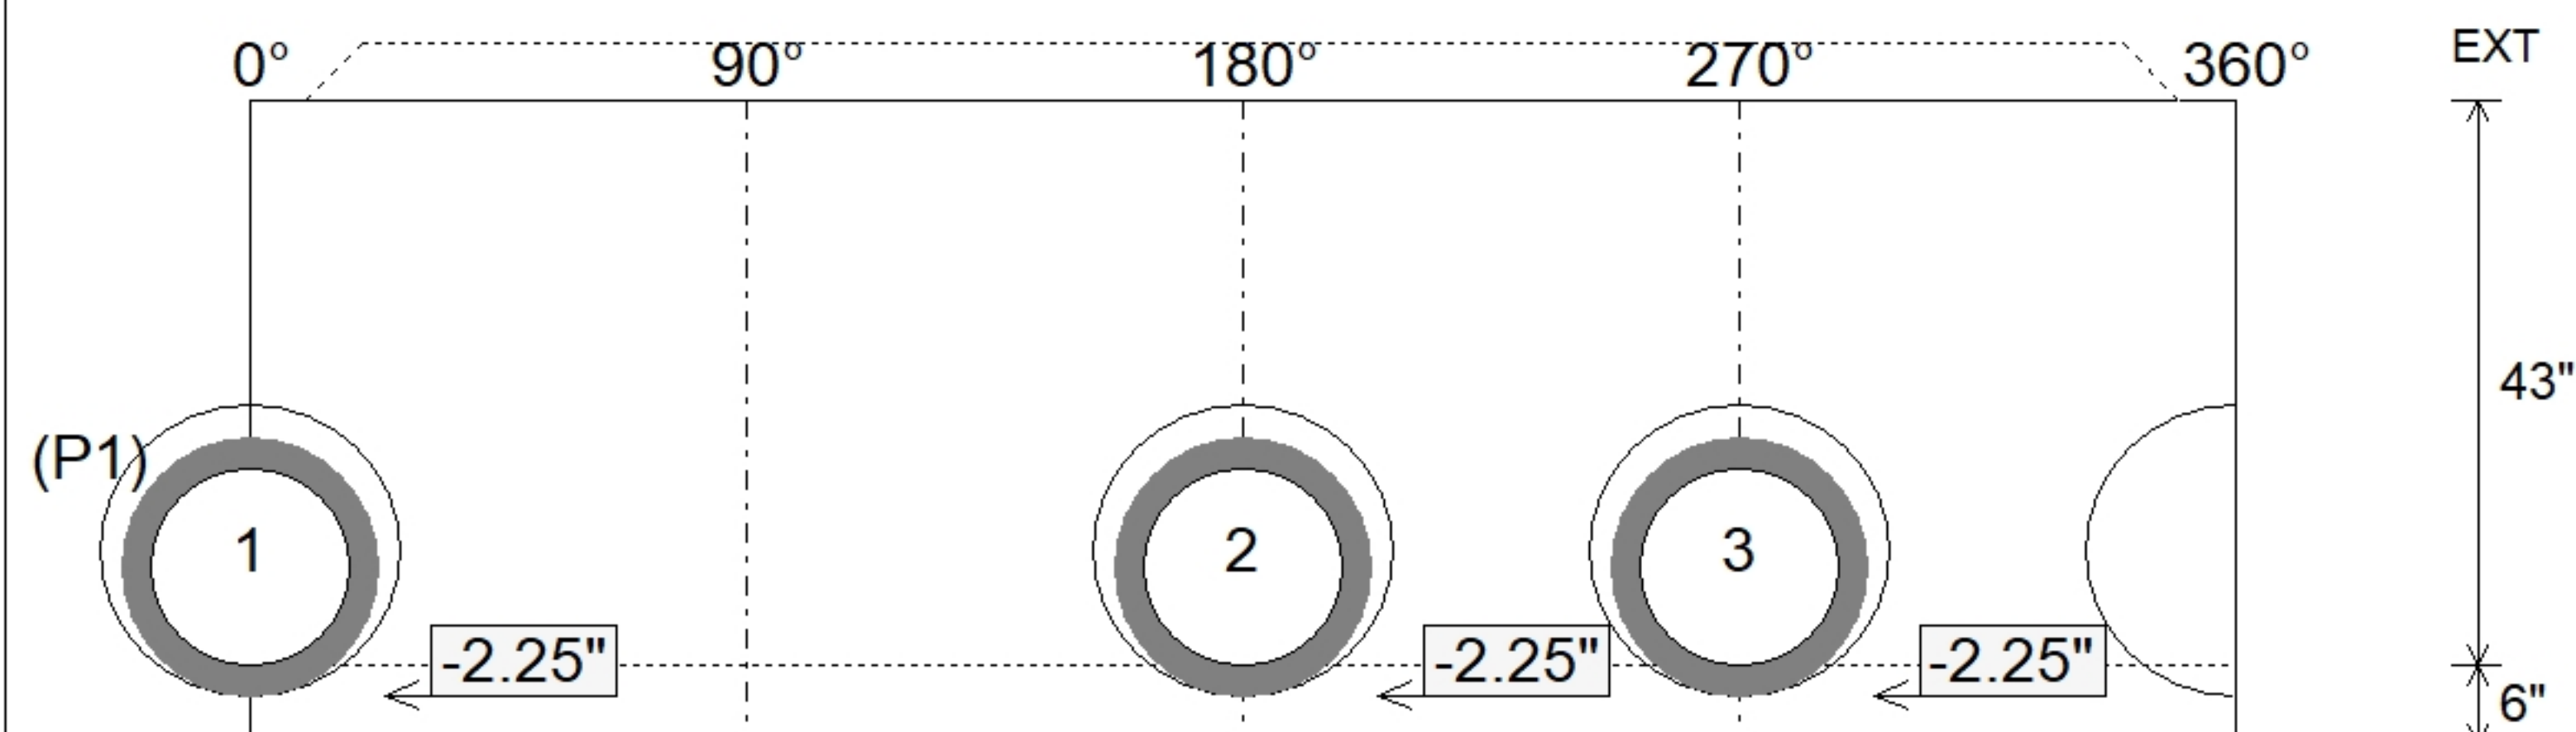

SUBMITTAL
APPROVED BY: