
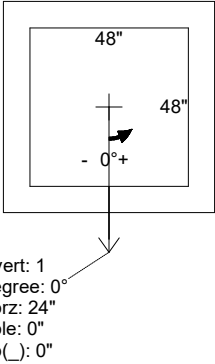
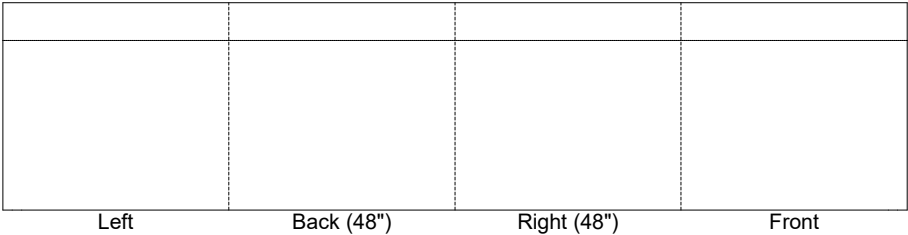


Job Name: 26-1899 - Gateway 65 Industrial Road Job Location: Franklin, KY Contractor: RD Sitework LLC					Plant: 100 6/4/2026 4:34:30 PM		Tech: Jared - F PC: E. Bardley				
Structure ID: QL70-1 POND2											
P1 BX4848-08BA36 BOX BASE 8inW, 8inF F/n											
P3) 24" x 24" - CASTING HEIGHT - 4" P2) 48" x 48" - BX FLAT LID 8inW w/CC 24"x24" HOLE F/F - 8" P1) 48" x 48" - BOX BASE 8inW, 8inF F/n - 36" 1) CASTING - HOE-326-BH F/G 1) 48" x 48" - Conseal CS-102 1.00" 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 0						0 lb 2363 lb 8163 lb 289 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 10815 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE-326-BH F/G OR EJ 6626). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 669' Rim to Invert: 4' Slack: 0" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	665'	0°	32"	0" No Hole	0.01"	Hole 0	0"	0"	0"	0"	0"
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  12" DIA. OPENING, FOR 8" WELL CASING PIPE. UPSIDE-DOWN VIEW (int. dimenions)  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 36" Height (Ext): 44"		Weight (Net): 8163 lb Volume (Net): 2.08cu.yd		