

Structure ID: QL3-3


P1 HWSF24CUST

24" - HW SLOPED & FLARED CUSTOM F/F





NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH NON-SHRINK GROUT AFTER SETTING.
5. WEIGHT: **1ST POUR - BASE W/TOE 2,521 LBS.**
 2ND POUR - WALLS - 1,549 LBS.
 TOTAL - 4,070 LBS.

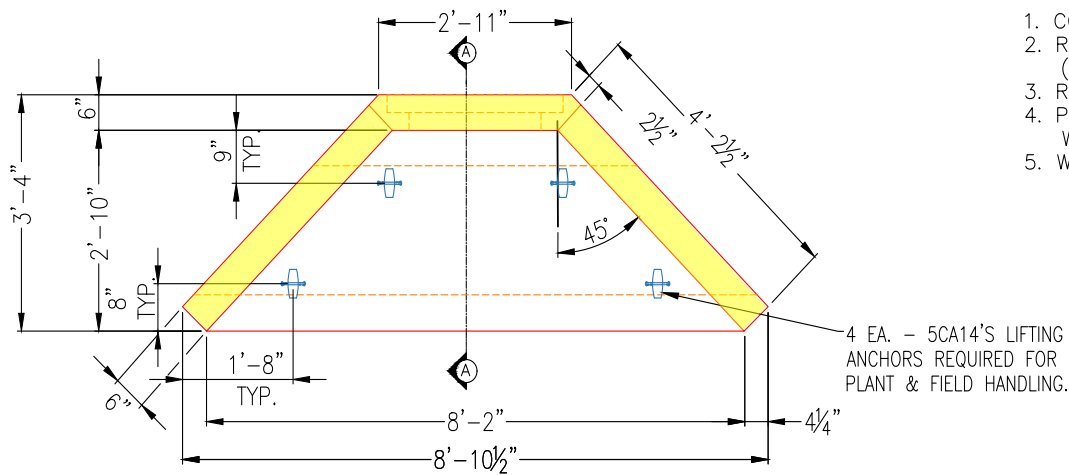

FIRST POUR DRAWING

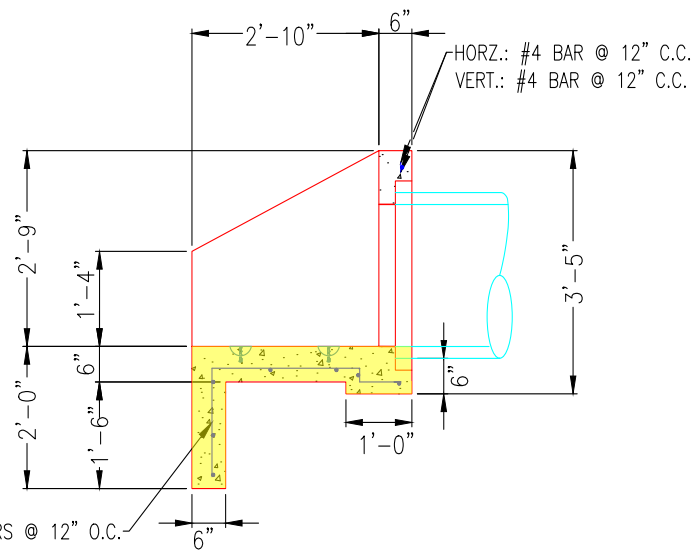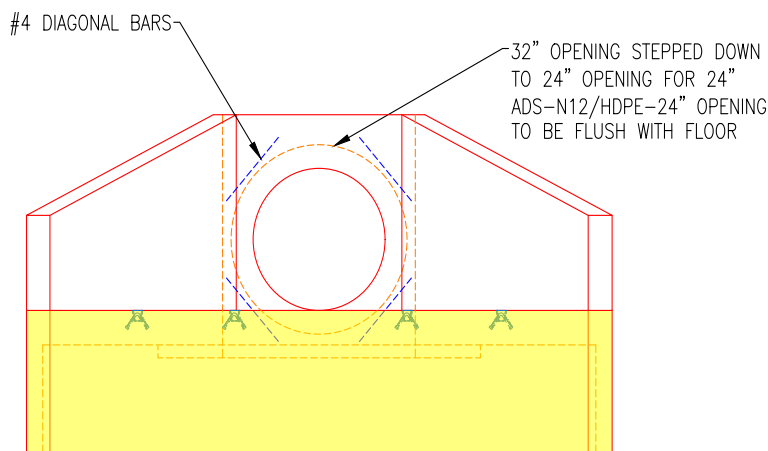

REVISION INFORMATION

REV. DATE: NO REVISIONS TO DATE



SUBMITTAL DRAWING: 24" WINGWALL
 CUSTOMER: TRITON CONSTRUCTION
 PROJECT: WV TURNPIKE CULVERT RETROFIT (1C-26)
 STRUCTURE: QL3-3
 QUOTE/SALES ORDER NO: 26-1908
 PC: E. BRADLEY
 DATE: 09/03/26

DRAWN BY: FMT
 SCALE: NTS
 PG. 1 of 1

Structure ID: QL3-3



P1 HWSF24CUST

24" - HW SLOPED & FLARED CUSTOM F/F




NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS
2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH NON-SHRINK GROUT AFTER SETTING.
5. WEIGHT: 1ST POUR - BASE W/TOE 2,521 LBS.
 2ND POUR - WALLS - 1,549 LBS.
 TOTAL - 4,070 LBS.

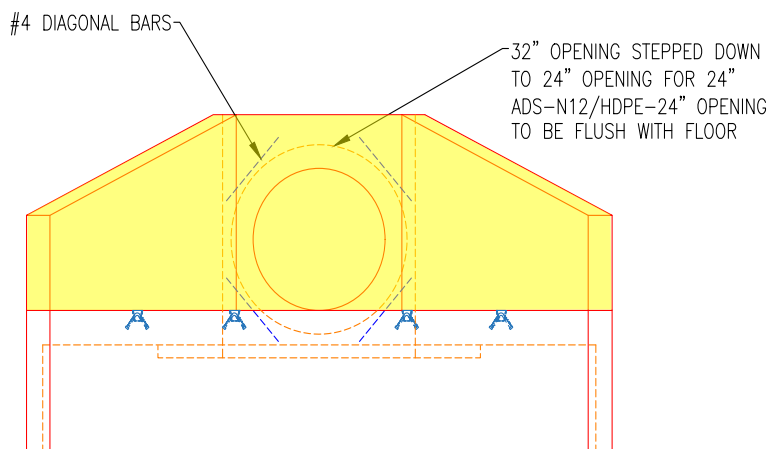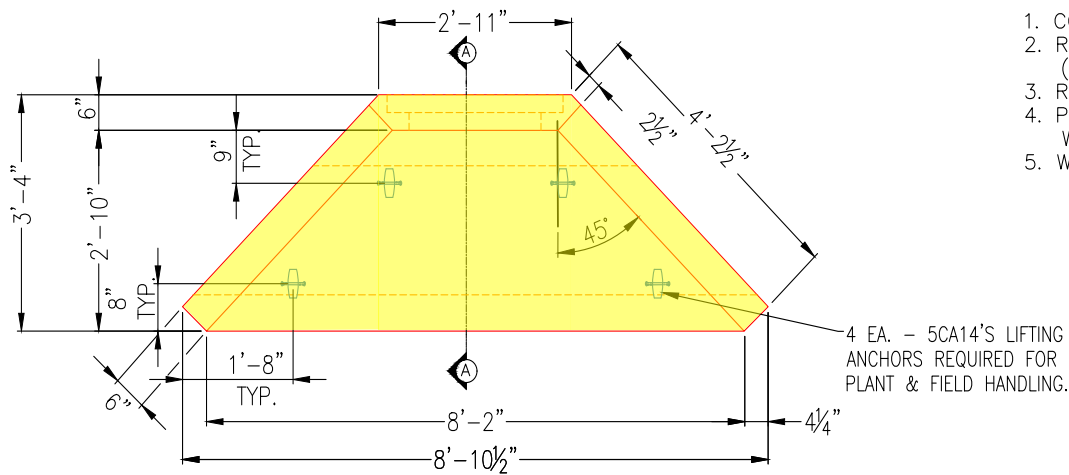

SECOND POUR DRAWING

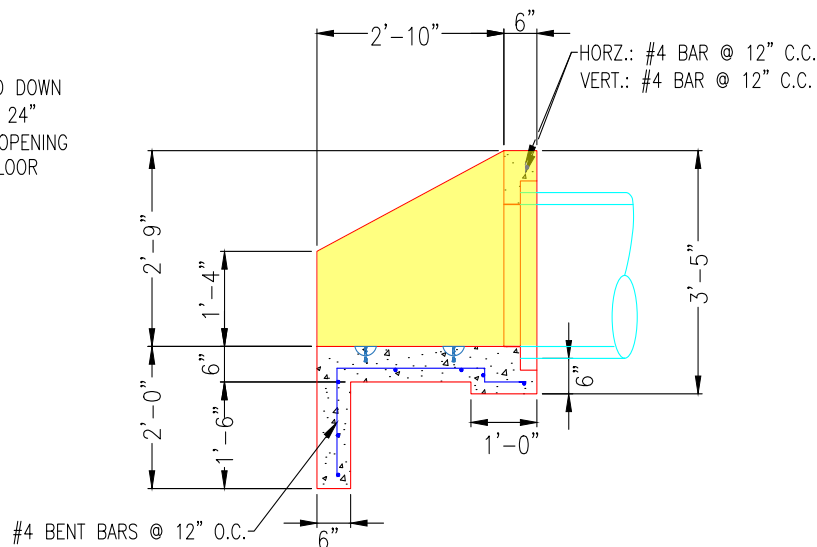

REVISION INFORMATION

REV. DATE: NO REVISIONS TO DATE



SUBMITTAL DRAWING: 24" WINGWALL
 CUSTOMER: TRITON CONSTRUCTION
 PROJECT: WV TURNPIKE CULVERT RETROFIT (1C-26)
 STRUCTURE: QL3-3
 QUOTE/SALES ORDER NO: 26-1908
 PC: E. BRADLEY DRAWN BY: FMT
 DATE: 09/03/26 SCALE: NTS PG. 1 of 1