



P5) 24" x 36" - CASTING HEIGHT - 6"					0 lb	Structure Notes: .
P4) 120" - MH FLAT TOP w/24"x36" Hole - 18"					16263 lb	**INDOT STATE PROJECT**
P3) 120" - MH RISER - 96"					36363 lb	1. INDOT MH TYPE M / ASTM C478 SPEC'S.
P2) 120" - MH RISER - 96"					36468 lb	2. CONCRETE = 4,000 PSI AT 28 DAYS.
P1) 120" - MH BASE - 96"					39415 lb	3. NO INVERT CHANNEL.
3) 120" - Conseal CS-102 1.00"					0 lb	4. REINFORCING PER ASTM A615 (GRADE 60).
1) 24" x 36" - Conseal CS-102 1.00"					0 lb	- TOP SLAB = H20 LOADING.
2) Hole - 90					0 lb	- RISER/WALLS (As .30)
4) Hole - 6					0 lb	- FLOOR (As .62) #5 BARS AT 6" C.C.E.W.
23) MH Step ML-10-TDS-NCR - 10"					0 lb	5. TOP SLAB IS ON HOLD
						6. CASTING BY OTHERS
Structure Total:					128509 lb	
Rim: 512.42'						
Rim to Invert: 26.6'						
Slack: 14.2"						
Sump: 7"						
Step Position: 225°						

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3	505.92'	0°	0"	4" HDPE	4.8"	Hole 6	6"	6.003"	49.8"	0"
Invert 4	505.92'	90°	111.527"	4" HDPE	4.8"	Hole 6	6"	6.003"	49.8"	0"
Invert 5	505.92'	180°	223.053"	4" HDPE	4.8"	Hole 6	6"	6.003"	49.8"	0"
Invert 6	505.92'	270°	334.58"	4" HDPE	4.8"	Hole 6	6"	6.003"	49.8"	0"
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

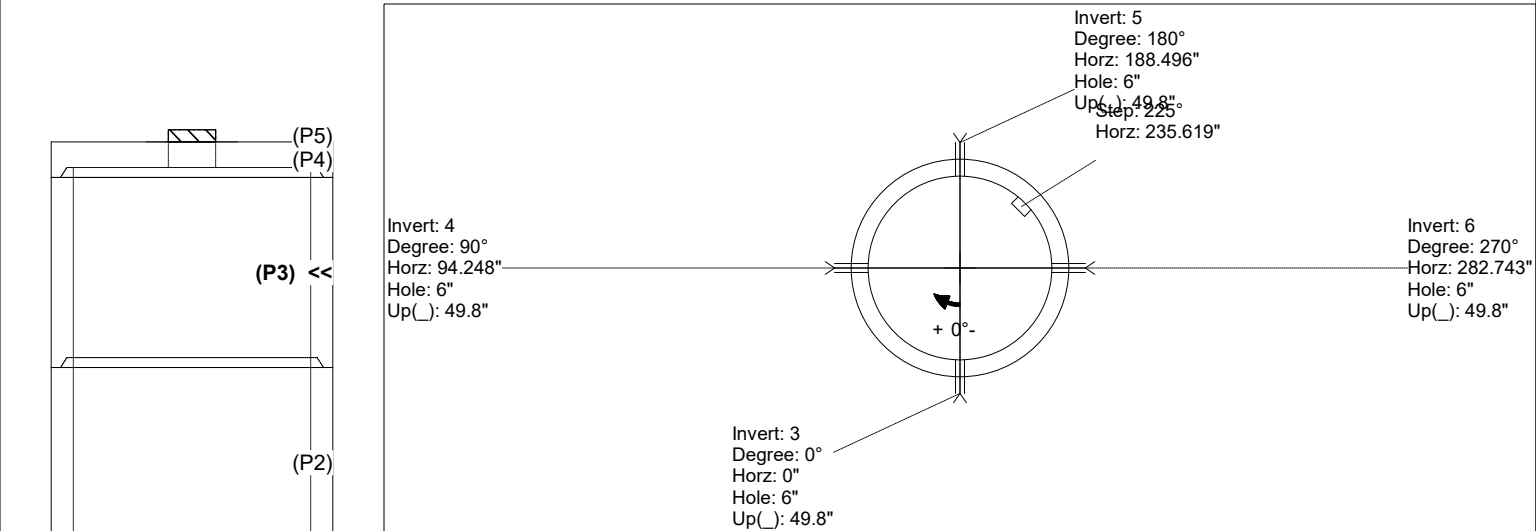

INSIDE WALL DIMENSIONS

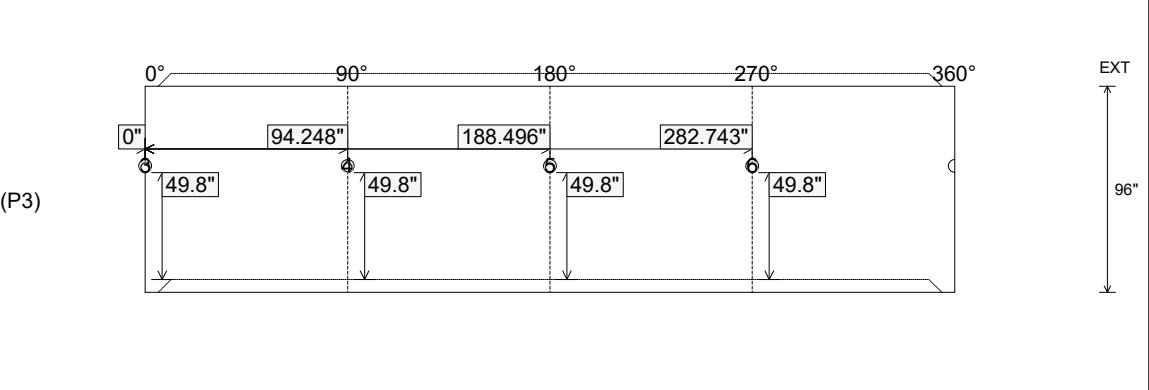

Coating (Int): Coating (Ext):		Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 11" Floor Height: 0"	Height (Int): 96" Height (Ext): 96"	Weight (Net): 36363 lb Volume (Net): 9.29cu.yd
---	--	---	--	---	--