

Job Name: 26-2018 - Hancock County Middle School Addition
 Job Location: Lewisport, KY
 Contractor: Mechanical Consultants Inc

Plant: 100

7/23/2026 5:01:32 PM

Tech: Jared - F

PC: T. Lewis



Structure ID: MH 6 SS-MH

P1 MH048BA36CDARED

MH BASE w/ConBlock-CDA Red T/n

P3) 24" - CASTING HEIGHT - 7"
 P2) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 42"

P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 36"

1) JOINT WRAP - 0.065"x12"x50' CONSEAL CS212

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT

1) ADMIXTURE CONBLOCK CDA RED

1) CASTING - HOE MC-375-SS F/C Self-Sealing Sanitary

1) 48" - Conseal CS-102 1.00" (Double)

1) 24" - Conseal CS-102 1.00" (Double)

2) PSX - 12-08 NYLO

7) MH Step ML-10-TDS-NCR - 10"

0 lb

3116 lb

3749 lb

0 lb

0 lb

1440 lb

0 lb

271 lb

0 lb

0 lb

16 lb

0 lb

Structure Total: 8593 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. ADMIXTURE = CONBLOCK CDA RED.

4. CASTING BY ICAST (HOE MC-375-SS F/C SELF-SEALING SANITARY).

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)

- RISER/WALLS (As .12)




- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 412' Rim to Invert: 7' Slack: 1" Sump: 2" Step Position: 270°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	405'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"
Invert 2	405.1'	180°	91.125"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

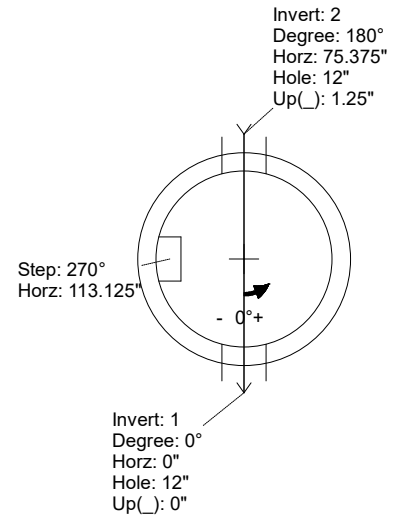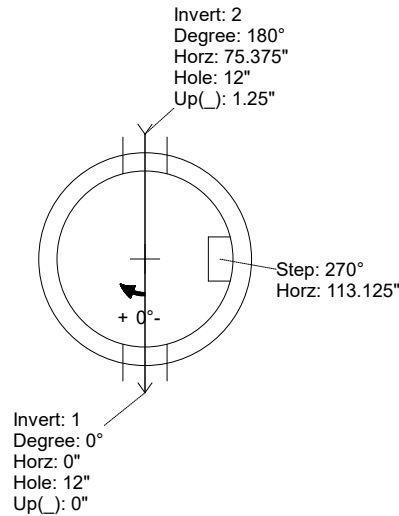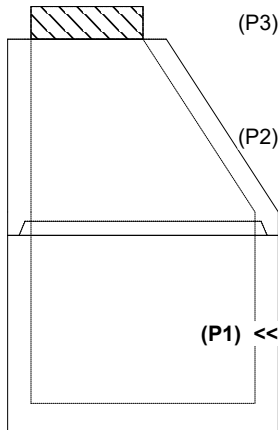

INSIDE WALL DIMENSIONS

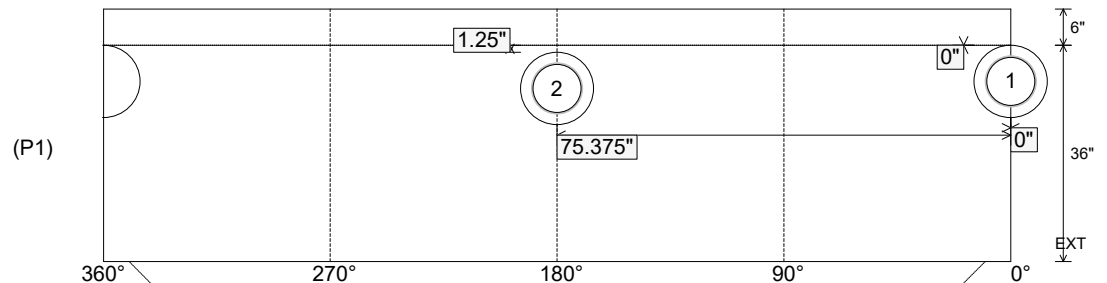

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 5"
 Floor Height: 6"

Height (Int): 36"
 Height (Ext): 42"

Weight (Net): 3749 lb
 Volume (Net): 0.96cu.yd

Job Name: 26-2018 - Hancock County Middle School Addition
 Job Location: Lewisport, KY
 Contractor: Mechanical Consultants Inc

Plant: 100

7/23/2026 5:01:32 PM

Tech: Jared - F

PC: T. Lewis



Structure ID: MH 6 SS-MH

P1 MH048BA36CDARED

MH BASE w/ConBlock-CDA Red T/n

- P3) 24" - CASTING HEIGHT - 7"
 P2) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red F/G - 42"
 P1) 48" - MH BASE w/ConBlock-CDA Red T/n - 36"
 1) JOINT WRAP - 0.065"x12"x50' CONSEAL CS212
 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT

- 1) ADMIXTURE CONBLOCK CDA RED
 1) CASTING - HOE MC-375-SS F/C Self-Sealing Sanitary
 1) 48" - ConSeal CS-102 1.00" (Double)
 1) 24" - ConSeal CS-102 1.00" (Double)
 2) PSX - 12-08 NYLO
 7) MH Step ML-10-TDS-NCR - 10"

0 lb
 3116 lb
 3749 lb
 0 lb
 0 lb
 1440 lb
 0 lb
 271 lb
 0 lb
 0 lb
 16 lb
 0 lb

 Structure Total: 8593 lb

Structure Notes:

- PER ASTM C478 SPECIFICATIONS.
 - CONCRETE = 4,000 PSI AT 28 DAYS.
 - ADMIXTURE = CONBLOCK CDA RED.
 - CASTING BY ICAST (HOE MC-375-SS F/C SELF-SEALING SANITARY).
- REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total:



Rim: 412' Rim to Invert: 7' Slack: 1" Sump: 2" Step Position: 270°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	405'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"
Invert 2	405.1'	180°	91.125"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

FOR INVERT ONLY

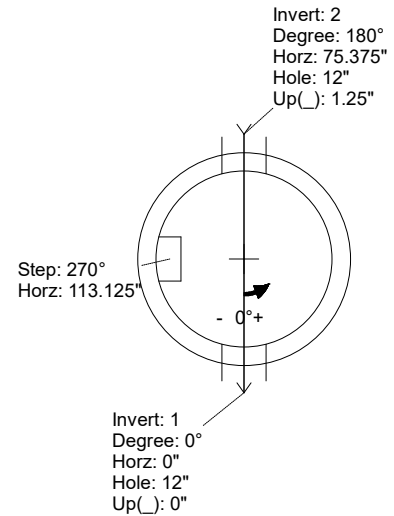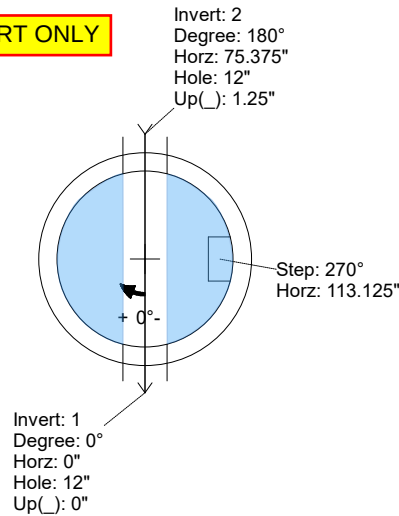

INSIDE WALL DIMENSIONS

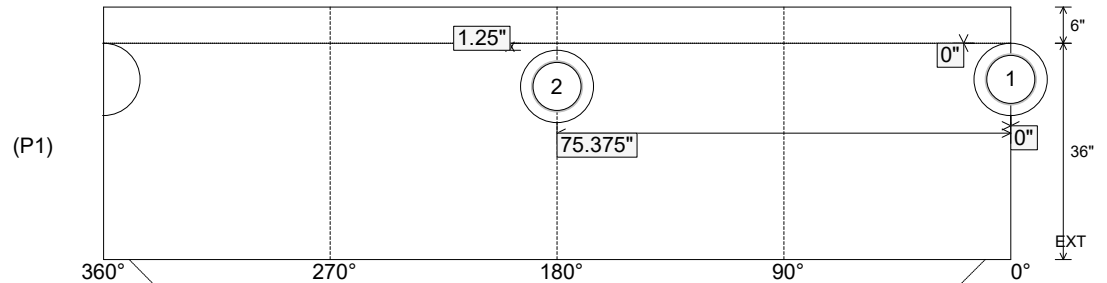

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 5"
 Floor Height: 6"

Height (Int): 36"
 Height (Ext): 42"

Weight (Net): 3749 lb
 Volume (Net): 0.96cu.yd