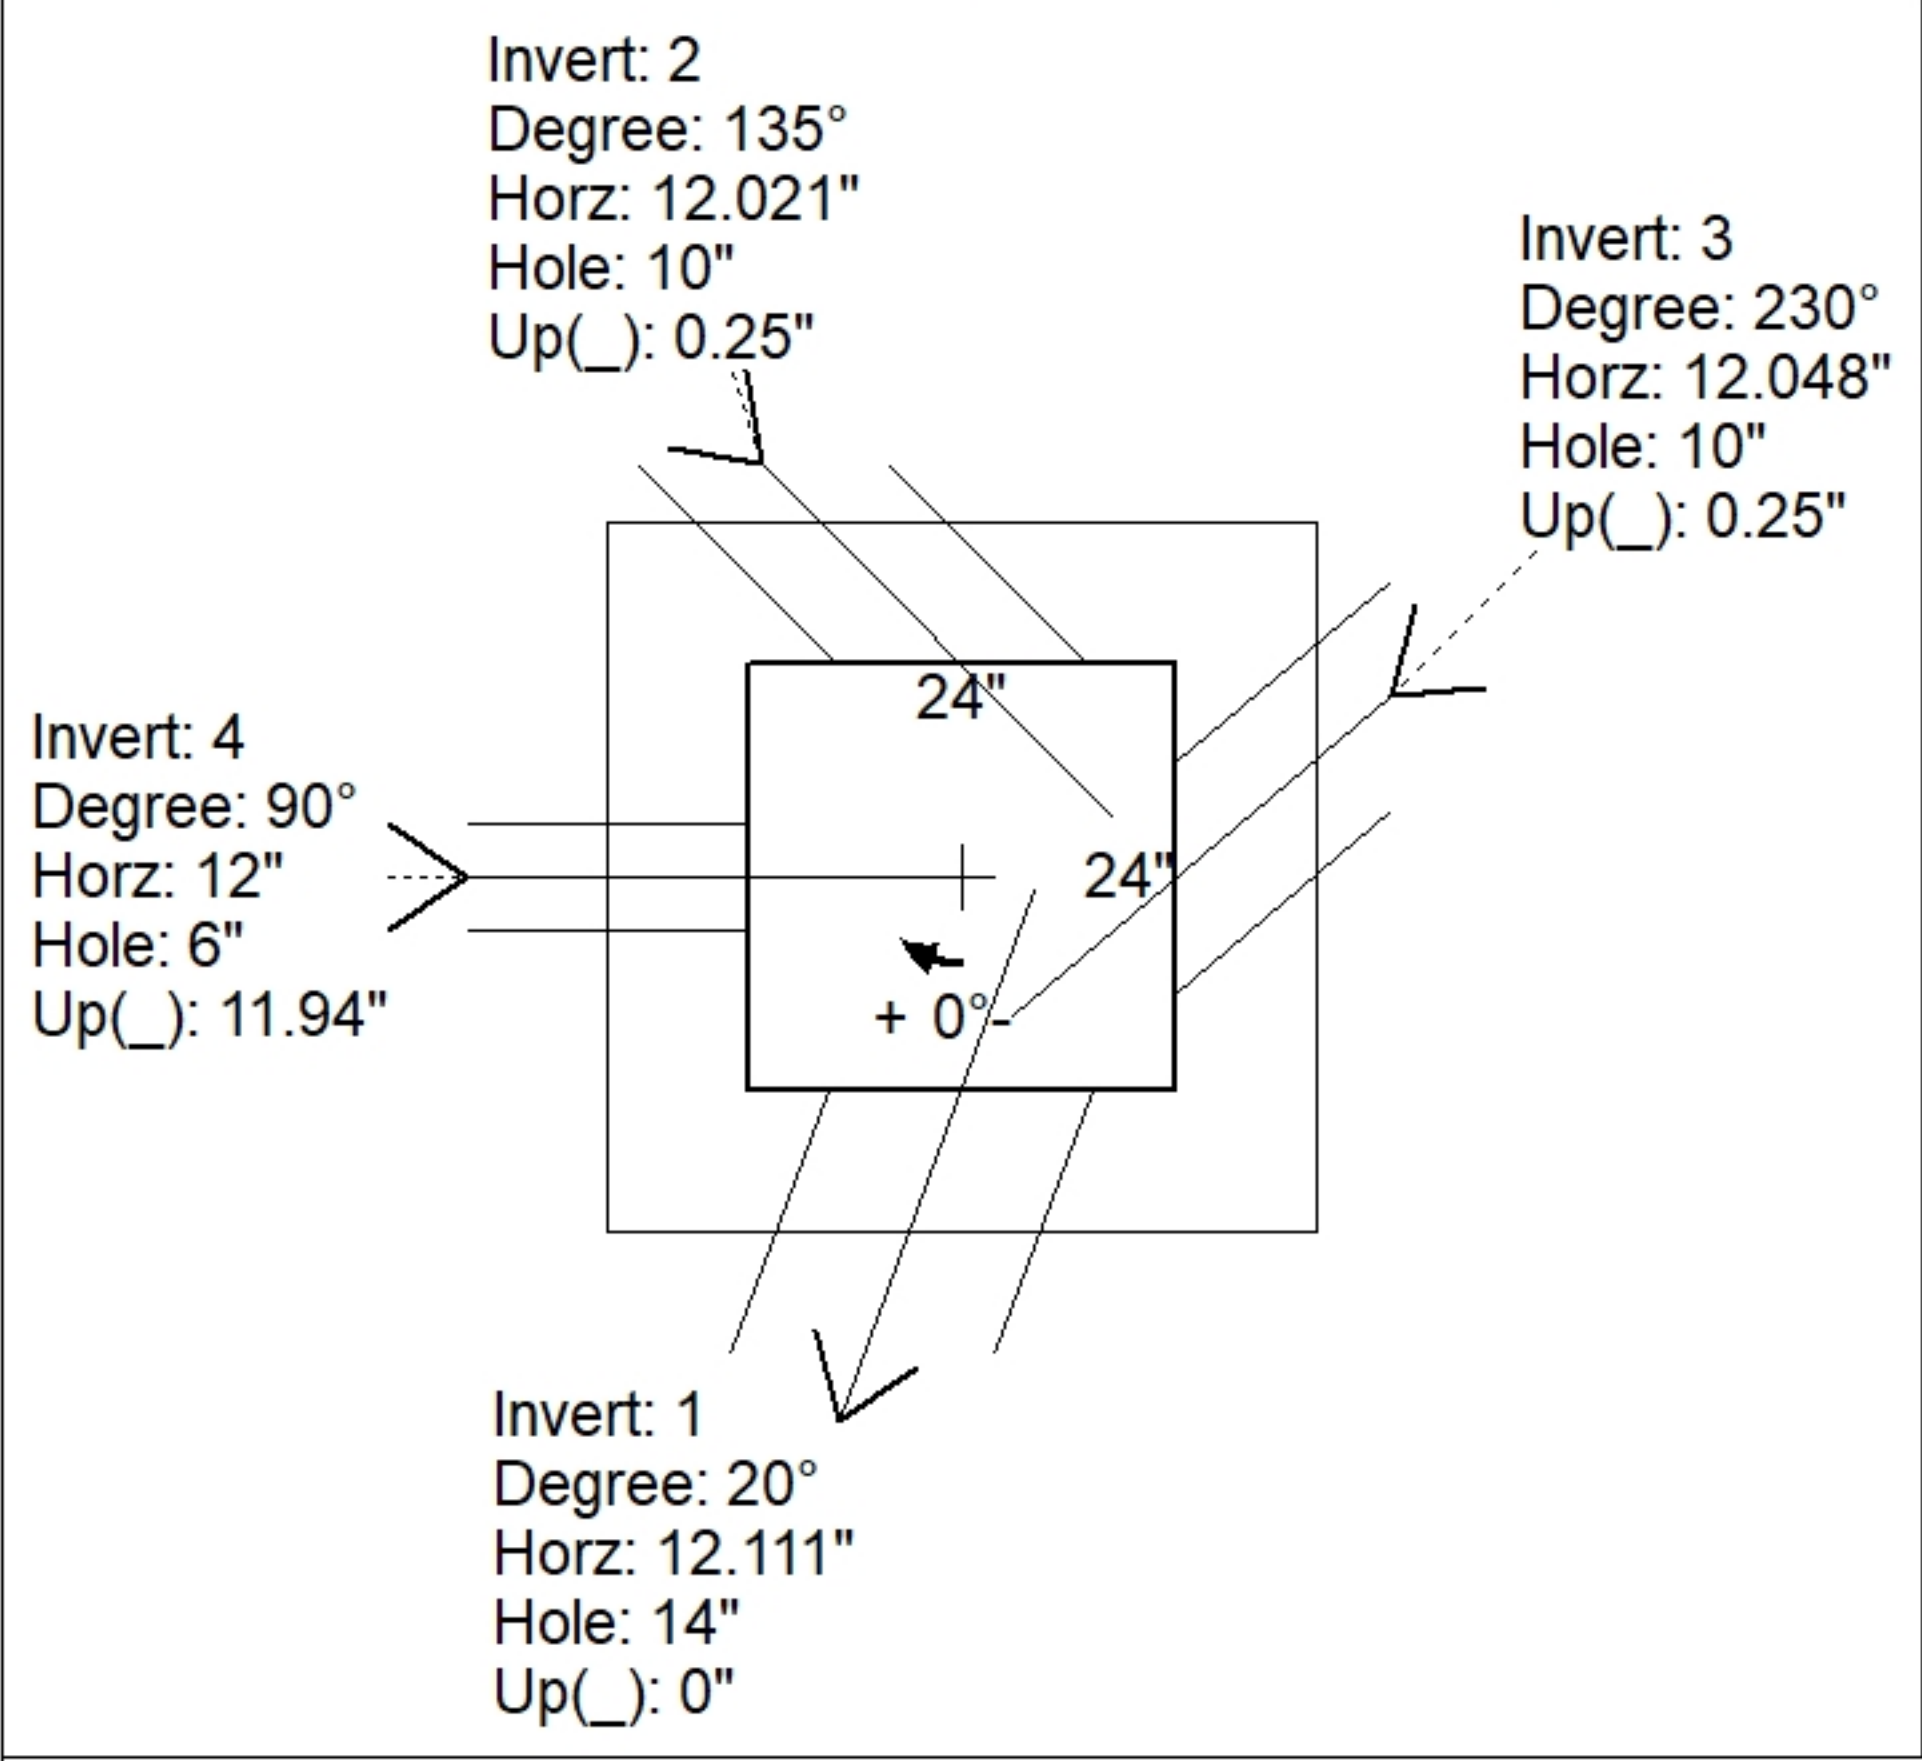
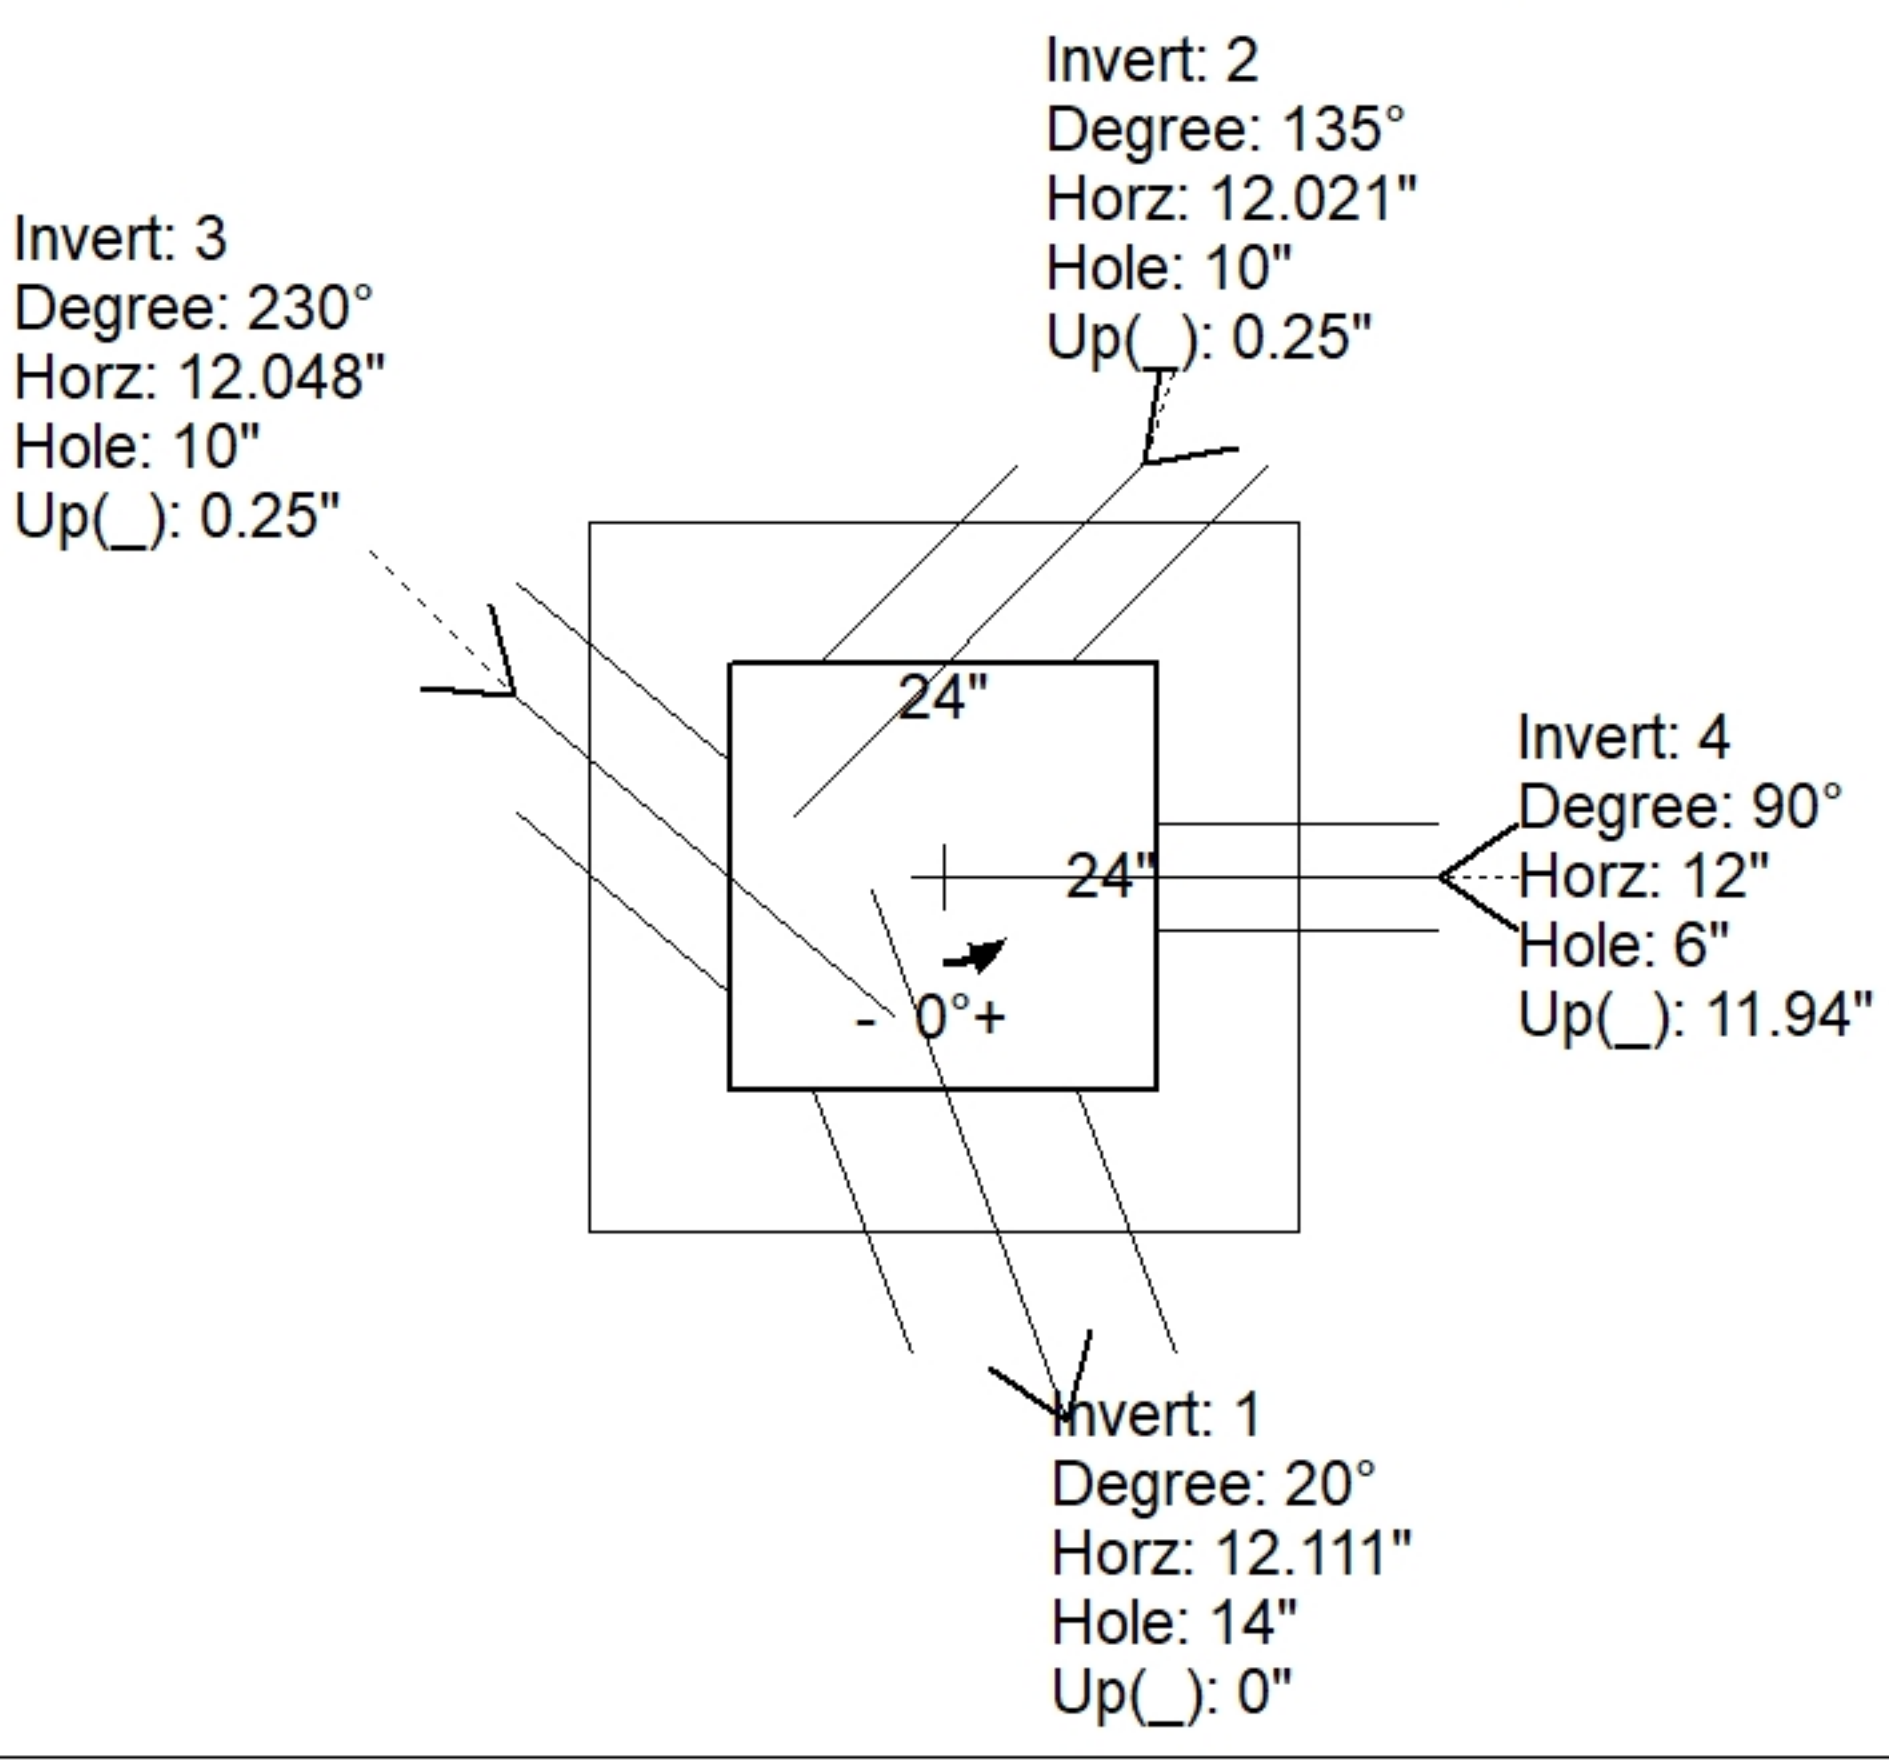
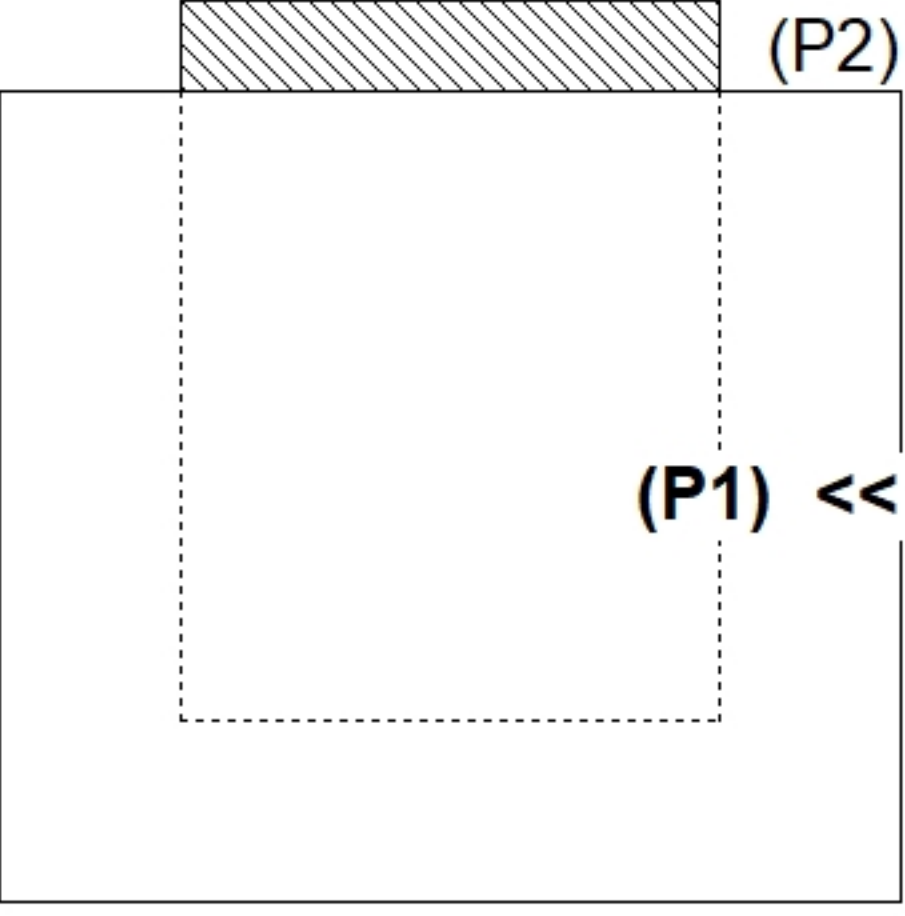
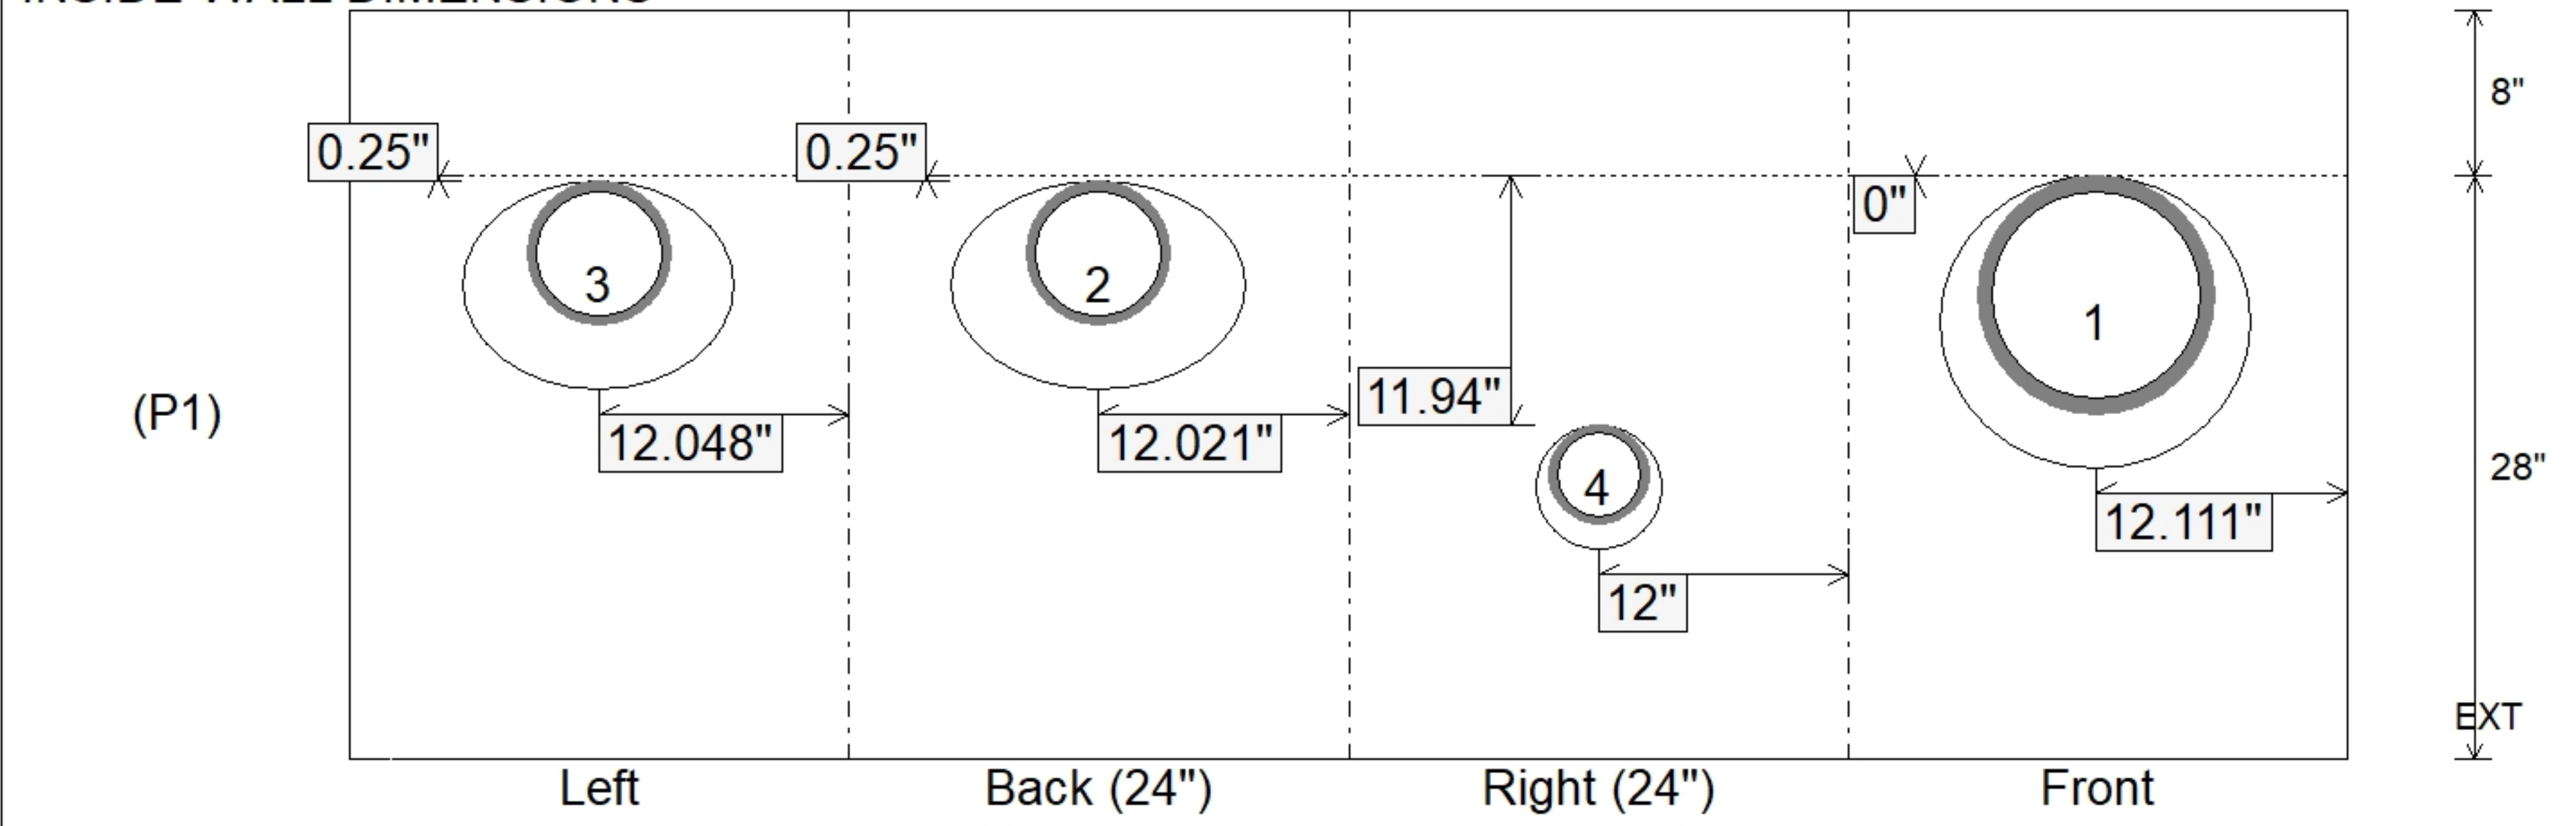


Job Name: 26-2018B Hancock Co Middle School Utility				Plant: Beaver Dam		Tech: S. Felletter				
Job Location: South Lewisport, KY				10/12/2026 8:19:45 AM		PC: A. Chambers				
Contractor: Winwater Hartford KY Co.										
Structure ID: DI-1C ST-IN										
P1		BX2424-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n						
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 28" 1) CASTING - HOE 280 ADA F/G 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 14 2) Hole - 10 1) Hole - 6				0 lb 3208 lb 138 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 3346 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE 280 ADA F/G). . REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 412'		Rim to Invert: 2.67'		Slack: 0.74"		Sump: 0.7"		Step Position:		
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	409.33'	20°	23.023"	10" HDPE	11.4"	Hole 14	14"	14.898"	0"	-4"
Invert 2	409.33'	135°	12.021"	6" HDPE	6.9"	Hole 10	10"	14.142"	0.25"	8.5"
Invert 3	409.33'	230°	13.335"	6" HDPE	6.9"	Hole 10	10"	13.054"	0.25"	7.75"
Invert 4	410.3'	90°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	11.94"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS 										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 28" Height (Ext): 36"		Weight (Net): 3208 lb Volume (Net): 0.82cu.yd	