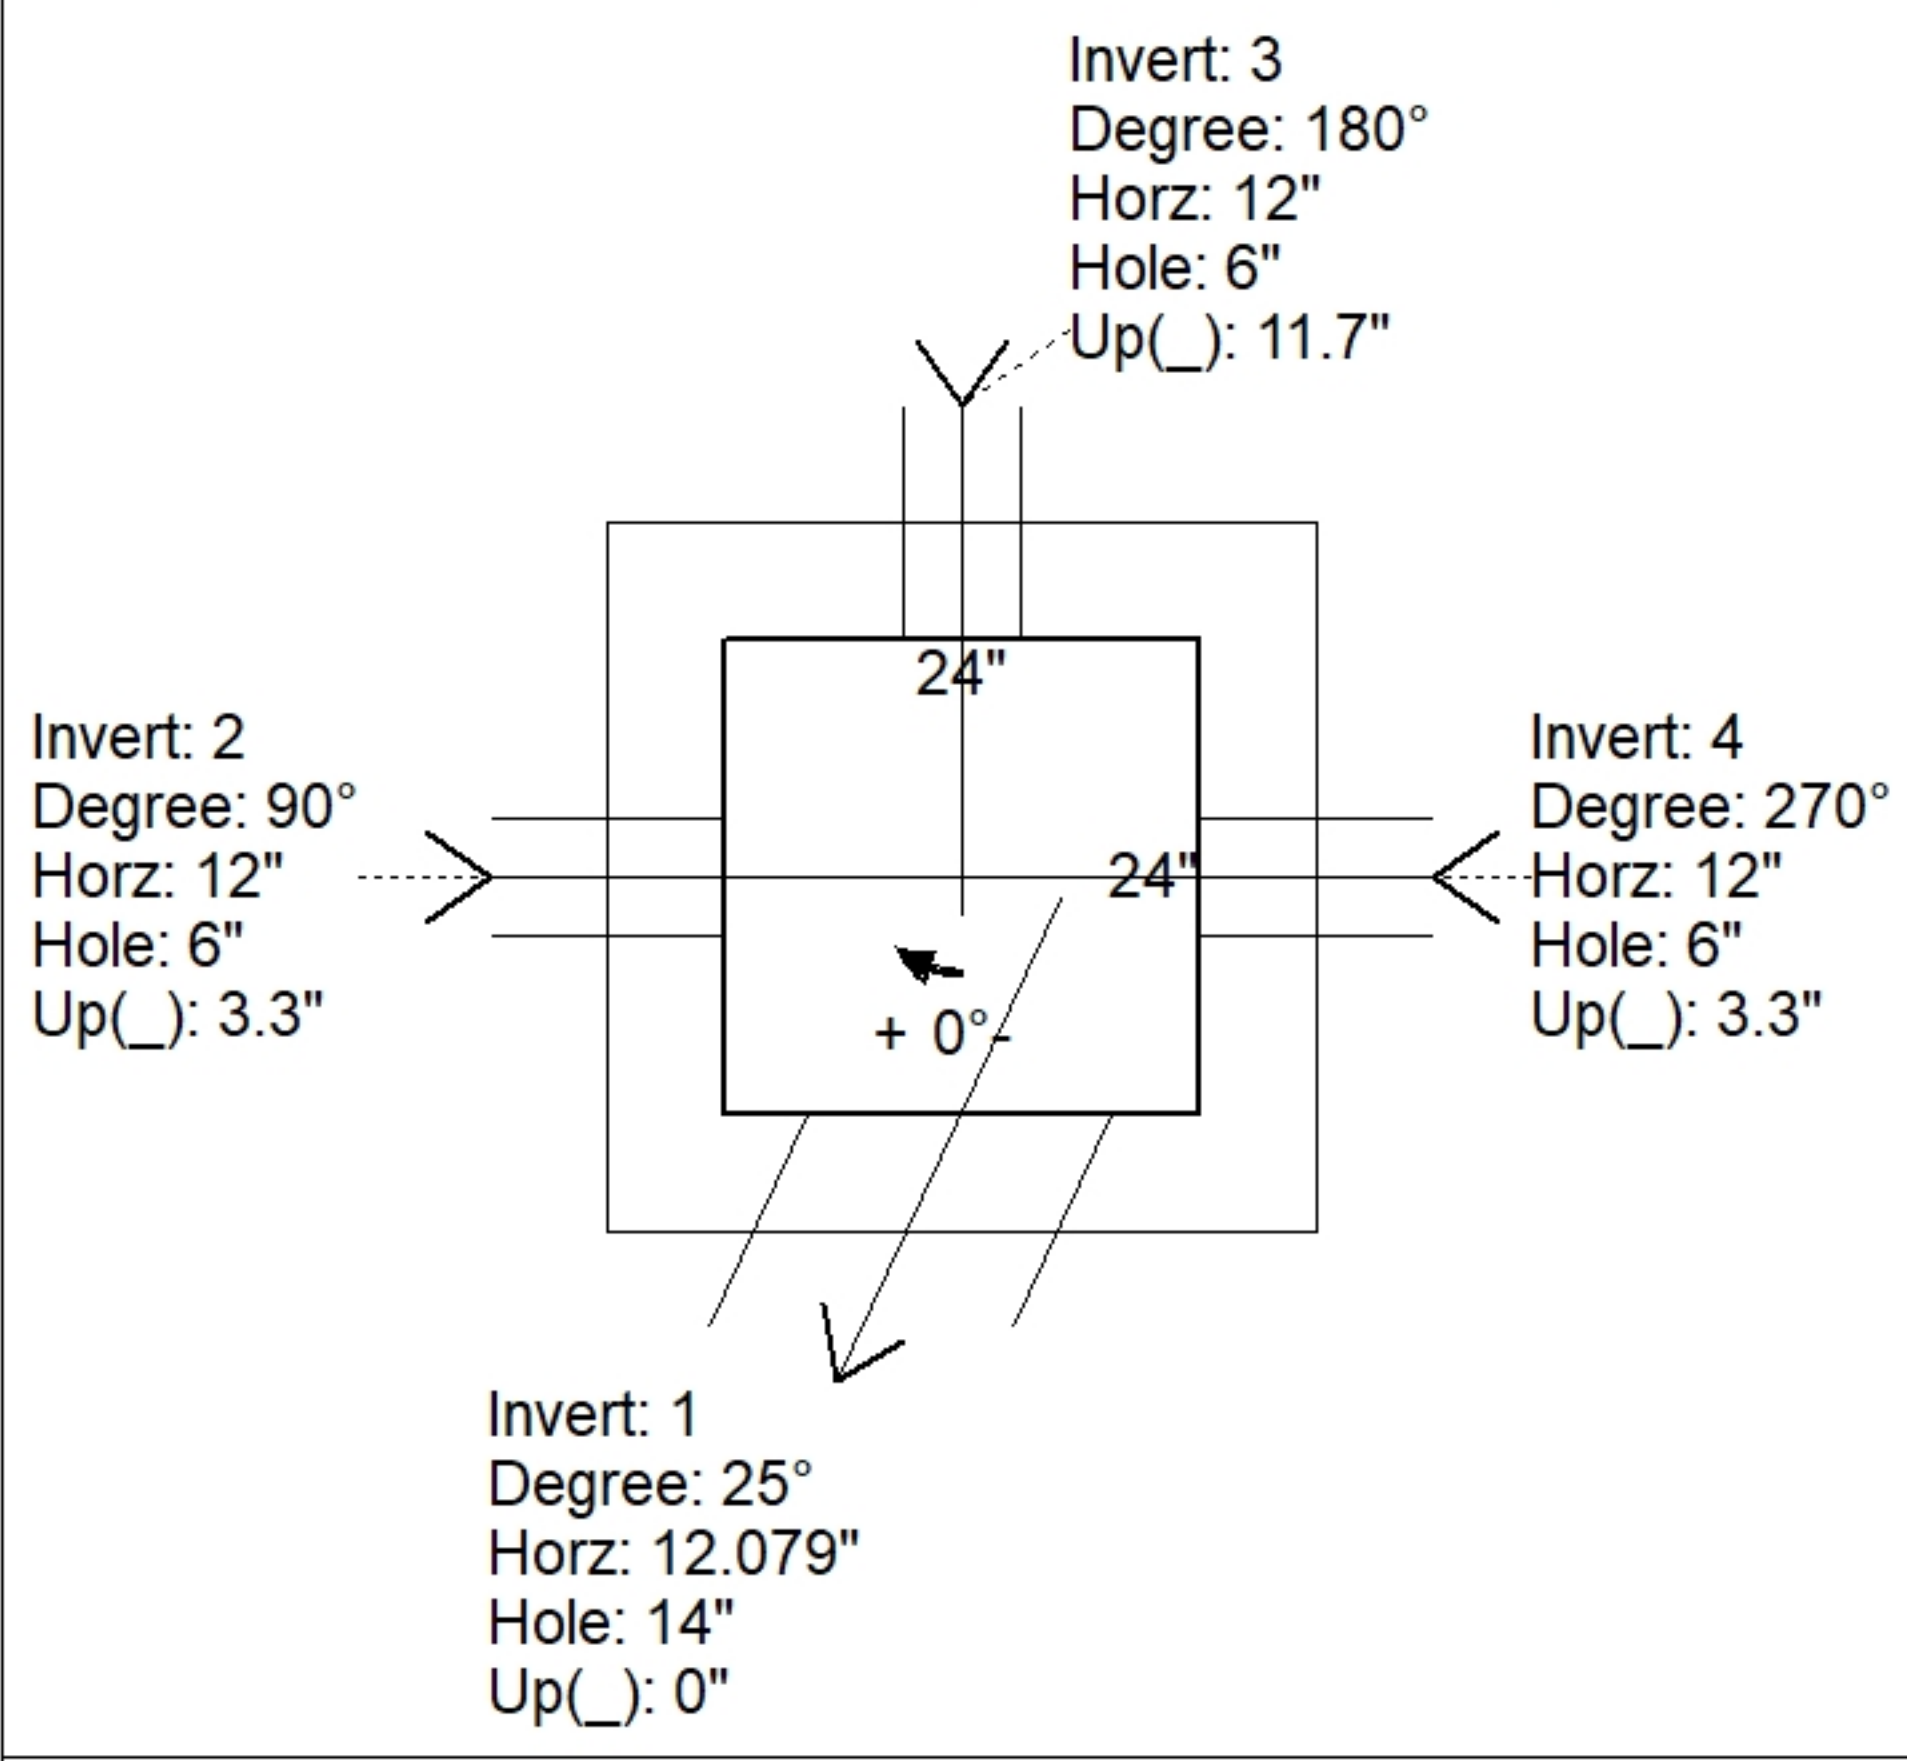
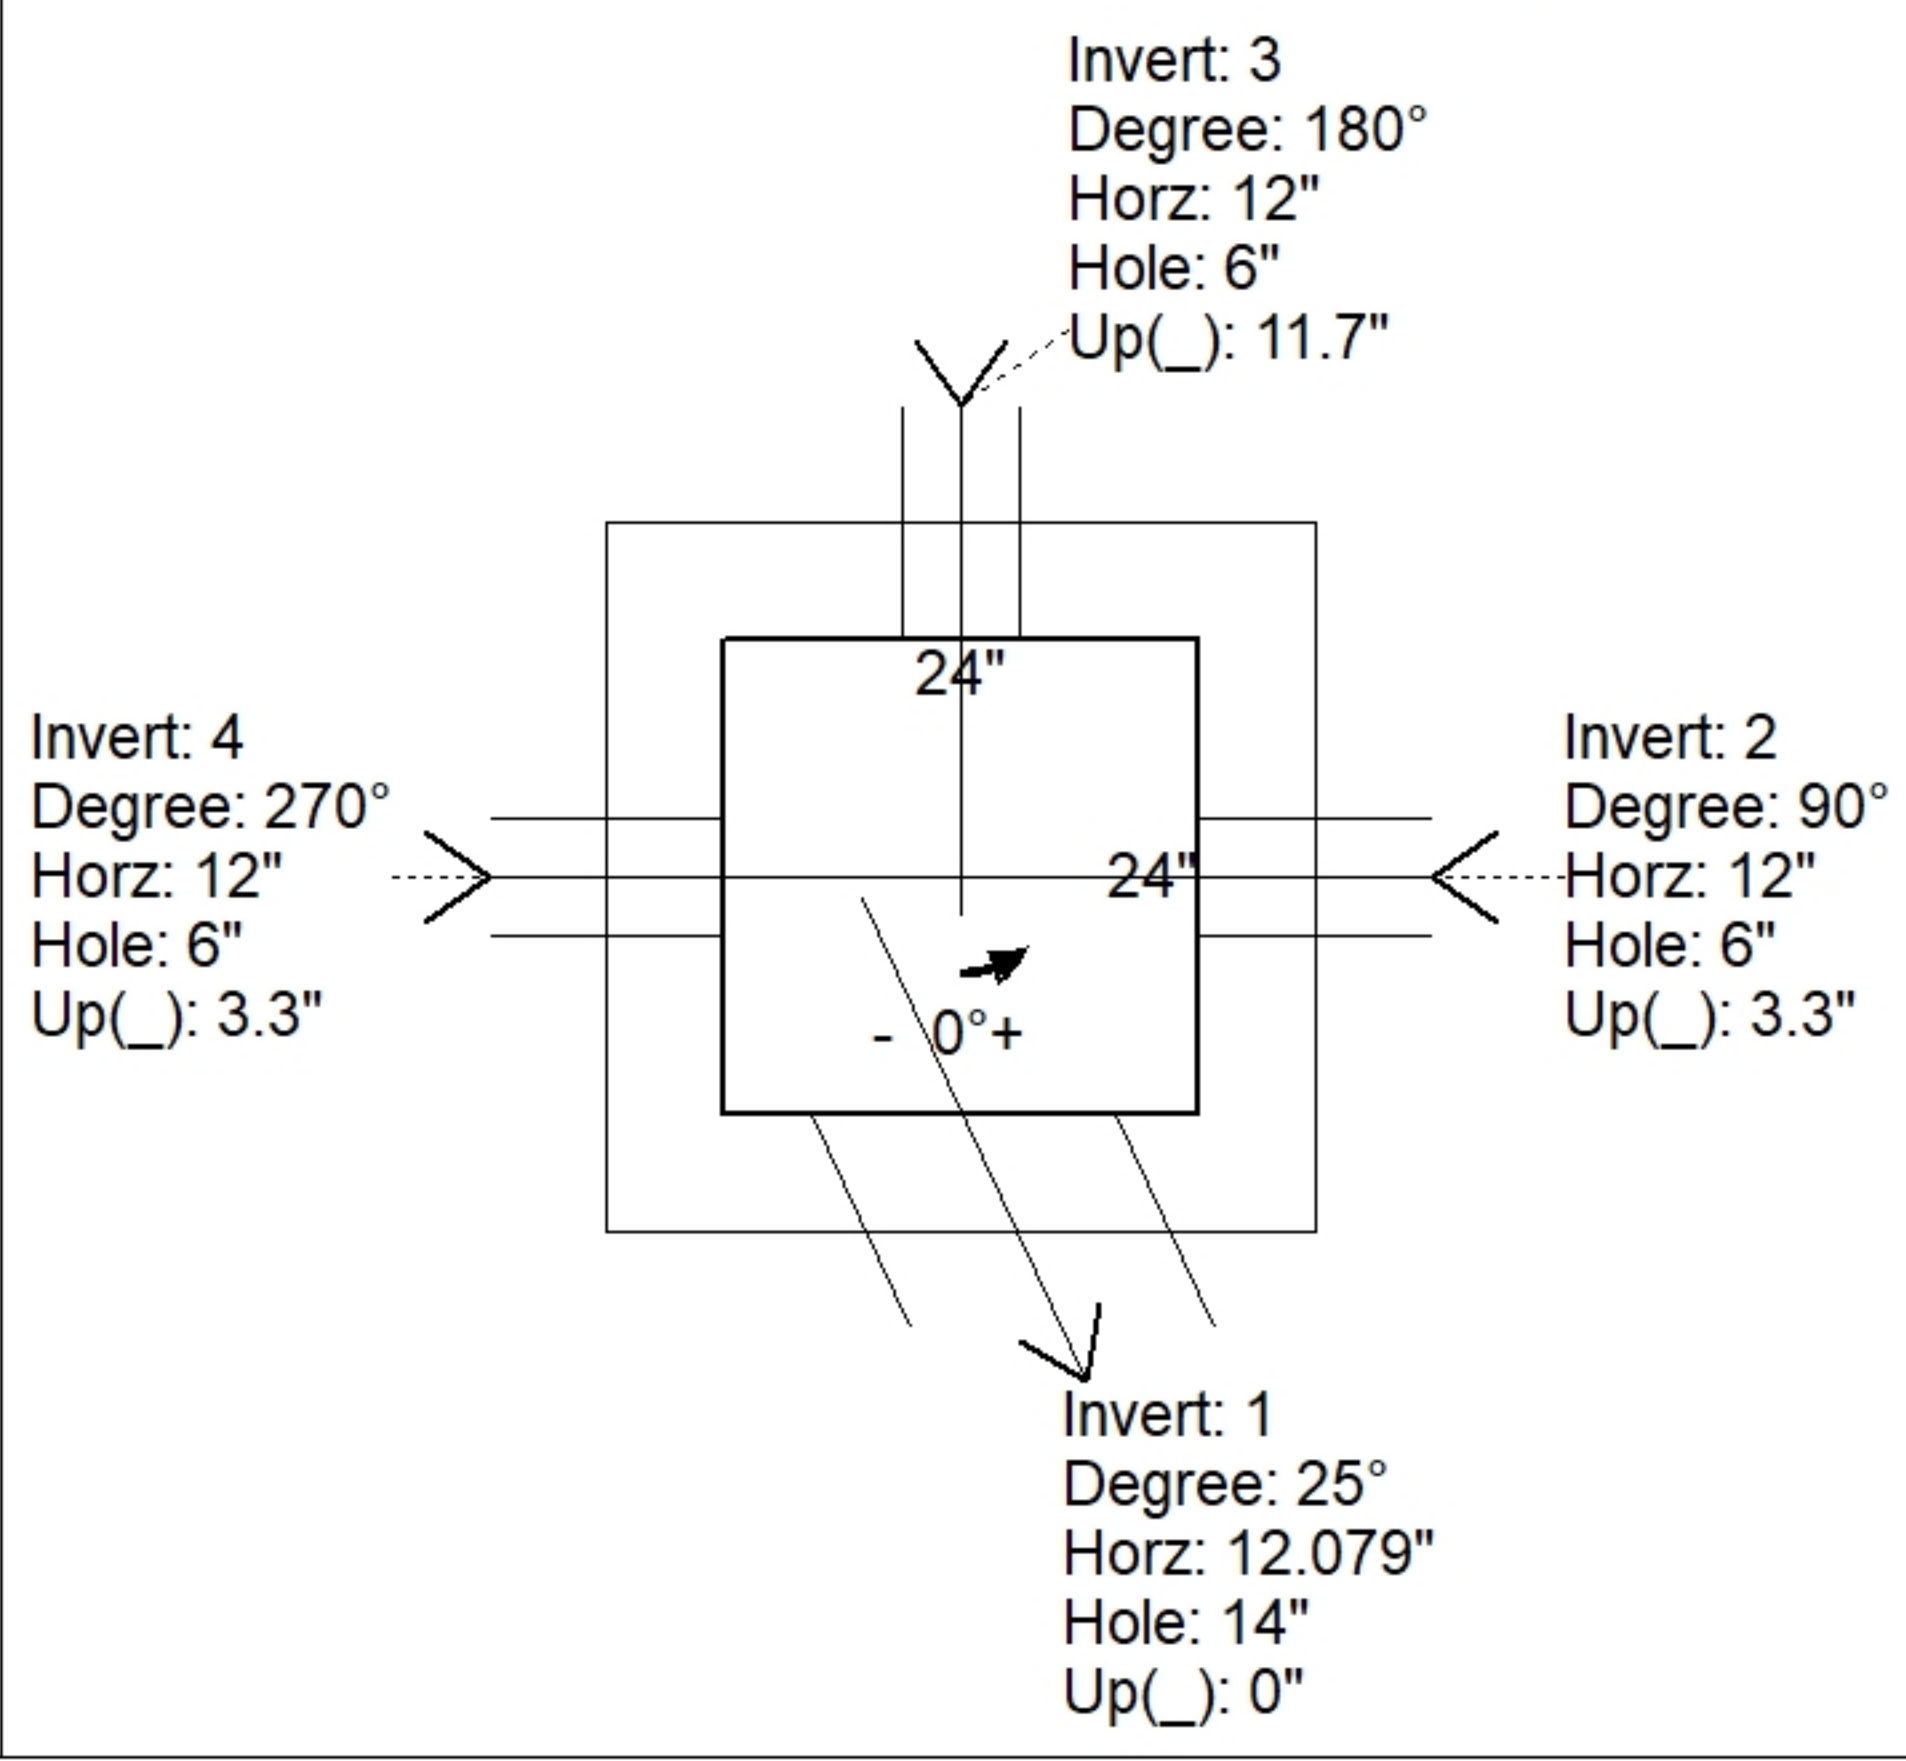
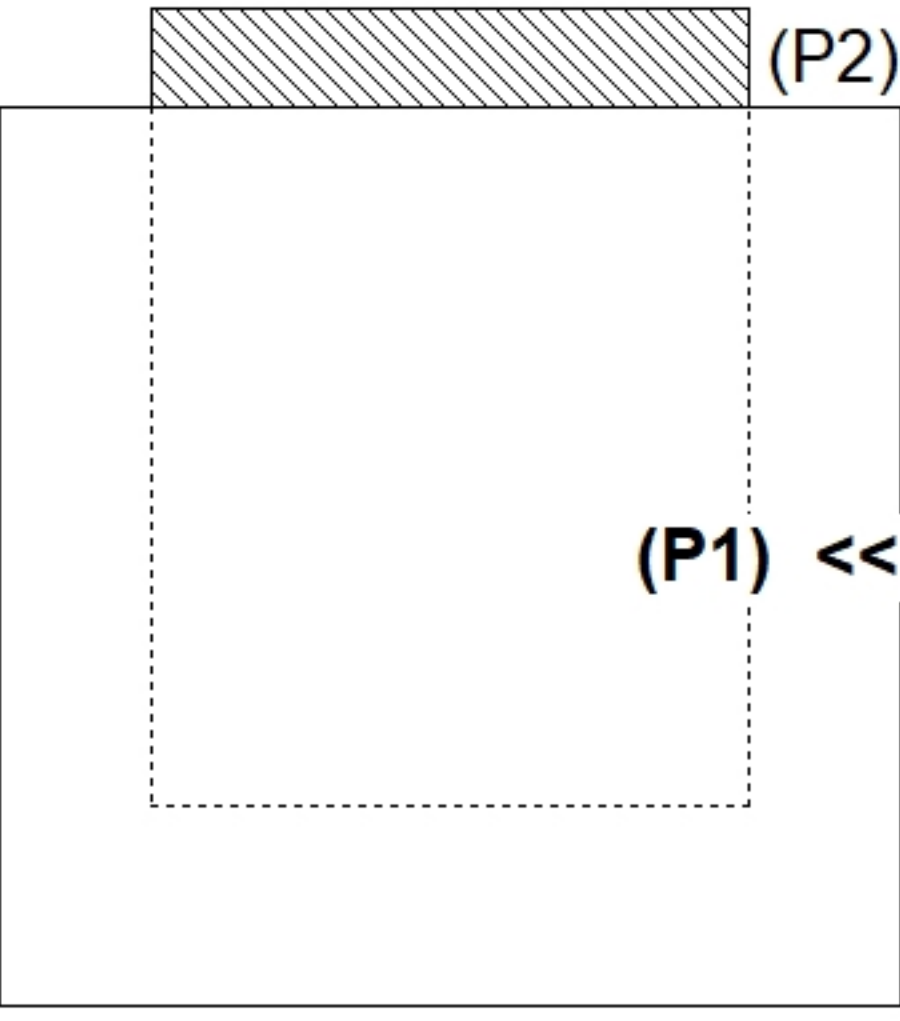
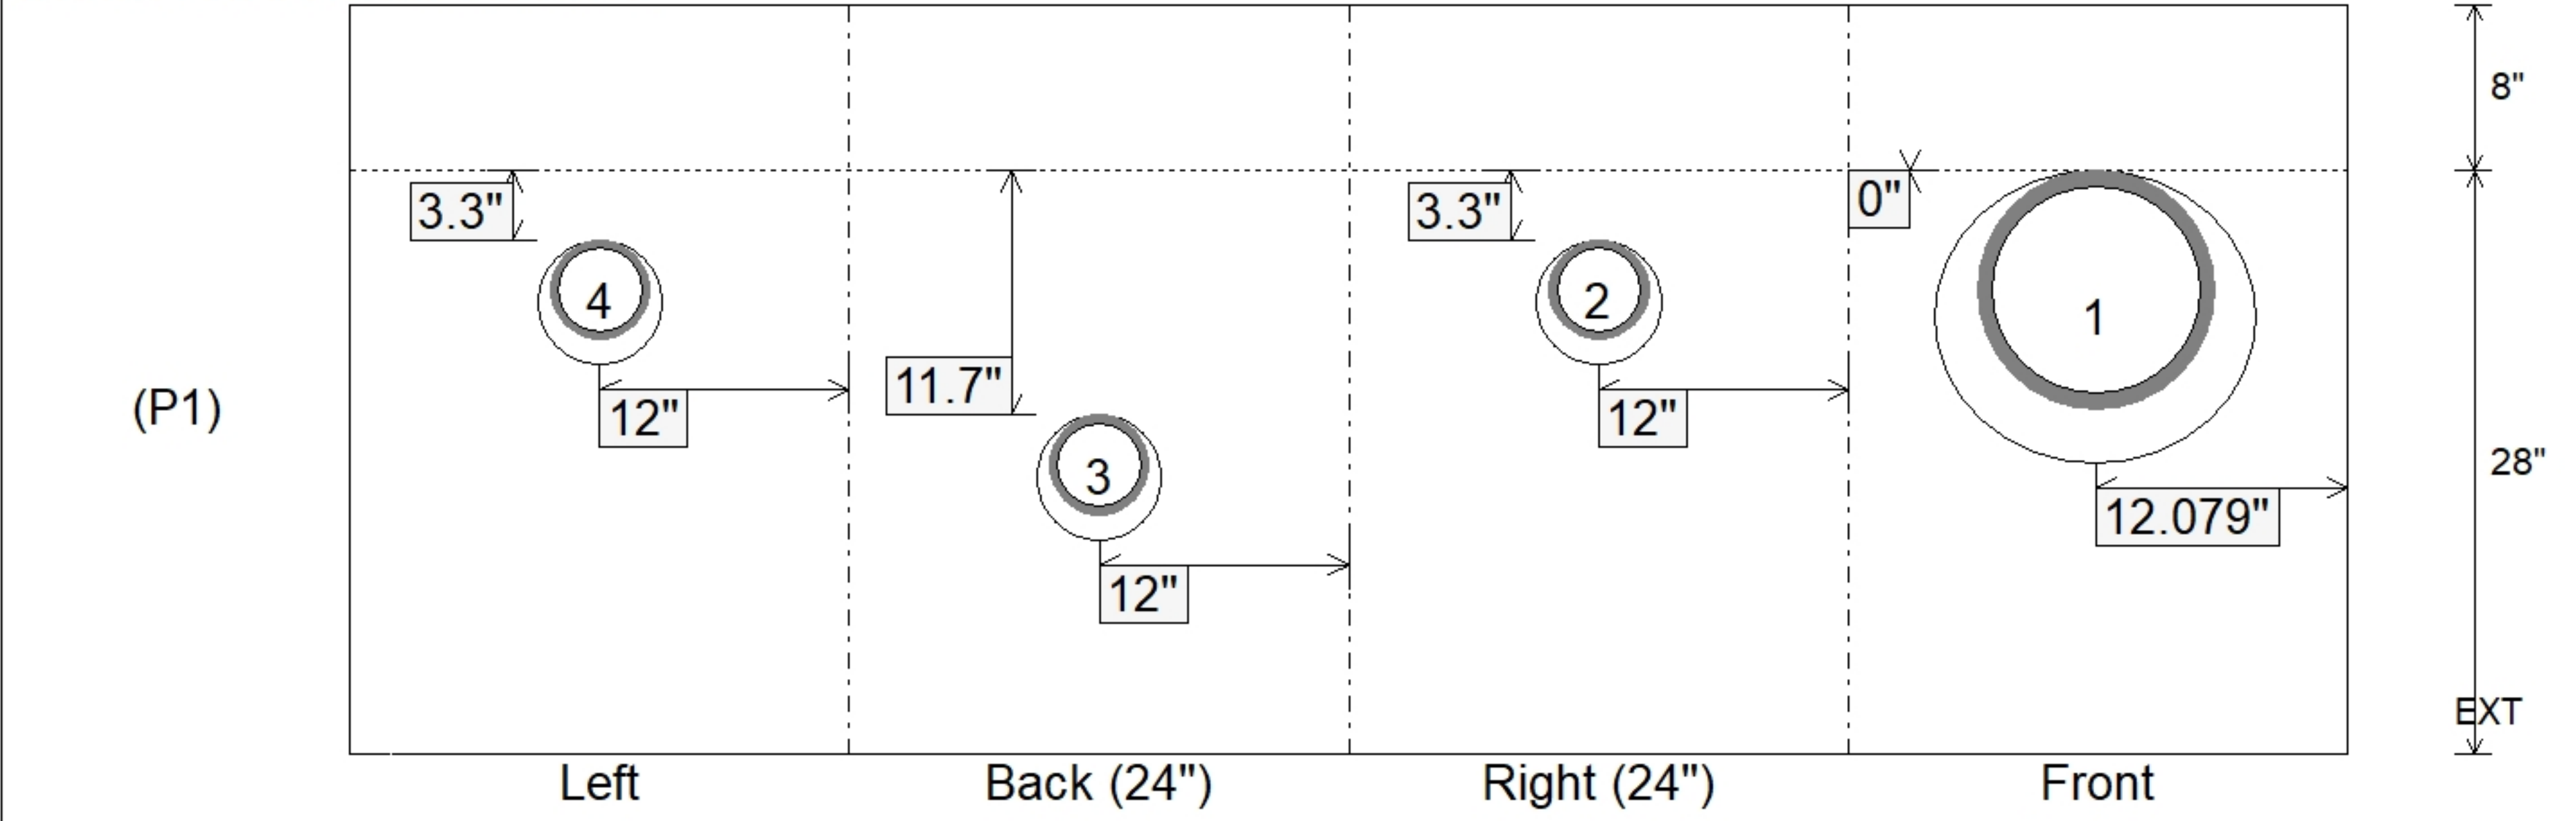


Job Name: 26-2018B Hancock Co Middle School Utility Job Location: South Lewisport, KY Contractor: Winwater Hartford KY Co.				Plant: Beaver Dam 10/12/2026 8:19:37 AM		Tech: S. Felletter PC: A. Chambers				
Structure ID: DI-3A ST-IN										
P1		BX2424-06W08F-BAVF			BOX BASE 6inW, 8inF, Variable Ht F/n					
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 6inW, 8inF, Variable Ht F/n - 28" 1) CASTING - HOE 280T F/G 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 14 3) Hole - 6					0 lb 2433 lb 182 lb 0 lb 0 lb 0 lb ----- Structure Total: 2615 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE 280T F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 412.4' Rim to Invert: 2.65' Slack: 0.5' Sump: 0.7' Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	409.75'	25°	20.877"	10" HDPE	11.4"	Hole 14	14"	15.447"	0"	-5"
Invert 2	410'	90°	18"	4" HDPE	4.8"	Hole 6	6"	6"	3.3"	0"
Invert 3	410.7'	180°	18"	4" HDPE	4.8"	Hole 6	6"	6"	11.7"	0"
Invert 4	410'	270°	18"	4" HDPE	4.8"	Hole 6	6"	6"	3.3"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS 										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 6" Floor Height: 8"		Height (Int): 28" Height (Ext): 36"		Weight (Net): 2433 lb Volume (Net): 0.62cu.yd	