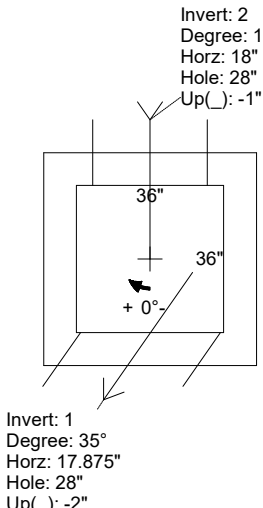
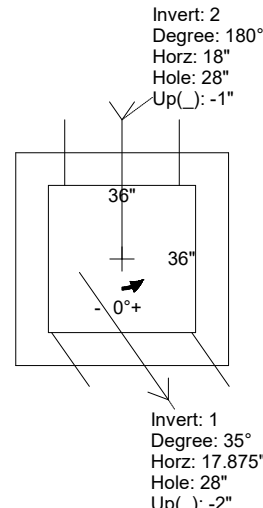
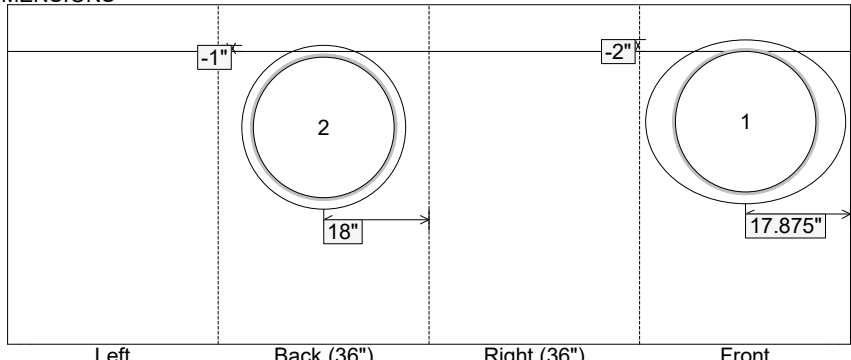


Job Name: 26-2025 - KYTC Warren Co (261510) Job Location: Bowling Green, KY Contractor: Mick-Murf Construction Inc.					Plant: 100 8/25/2026 12:58:54 PM		Tech: Jared - F PC: T. Lewis				
Structure ID: CB23 CBIA											
P1 BX3636-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n									
P5) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P4) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P3) 24" x 36" - BOX RISER 8inW T/G - 18" P2) 36" x 36" - CB TRANSITION SLAB 24"X36" HOLE T/F - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 50" 1) CASTING - HOE KY-206 F/C (KY CBI A) 1) 36" x 36" - Conseal CS-102 1.00" 2) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 28						3400 lb 5270 lb 1837 lb 1235 lb 6805 lb 206 lb 0 lb 0 lb 0 lb Structure Total: 18752 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-206 F/C (KY CBI A)) REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W (DBL MAT) - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 542.2'		Rim to Invert: 8.92'		Slack: 3.04"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	533.28'	35°	31.5"	24" CMP	25"	Hole 28	28"	34.182"	-2"	-10.4"	
Invert 2	533.36'	180°	26"	24" CMP	25"	Hole 28	28"	28"	-1"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 50" Height (Ext): 58"		Weight (Net): 6805 lb Volume (Net): 1.74cu.yd		