



Job Name: 26-2025 - KYTC Warren Co (261510) Job Location: Bowling Green, KY Contractor: Mick-Murf Construction Inc.					Plant: 100 8/25/2026 12:58:56 PM		Tech: Jared - F PC: T. Lewis				
Structure ID: DB33 DBI11											
P1 BX24300808VF		BOX BASE 8inW, 8inF, Variable Ht F/n									
P2) 24" x 30" - CASTING HEIGHT - 3.75" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 41" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 24" x 30" - Conseal CS-102 1.00" 2) Hole - 22"						0 lb 4578 lb 421 lb 0 lb 0 lb ----- 0 lb Structure Total: 4999 lb		Structure Notes: . **KYTC STATE PROJECT** 1. KYTC DBI TYPE 11 / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-460-11 F/G (DBI 11)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 569.7'		Rim to Invert: 4'		Slack: 3.25"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	565.7'	0°	20"	18" CMP	19"	Hole 22	22"	22"	-2"	0"	
Invert 2	565.78'	180°	20"	18" CMP	19"	Hole 22	22"	22"	-1"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

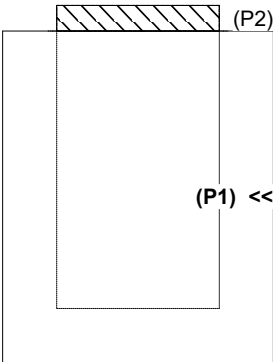

(P2)

(P1) <<


RIGHT-SIDE UP VIEW (int. dimensions)

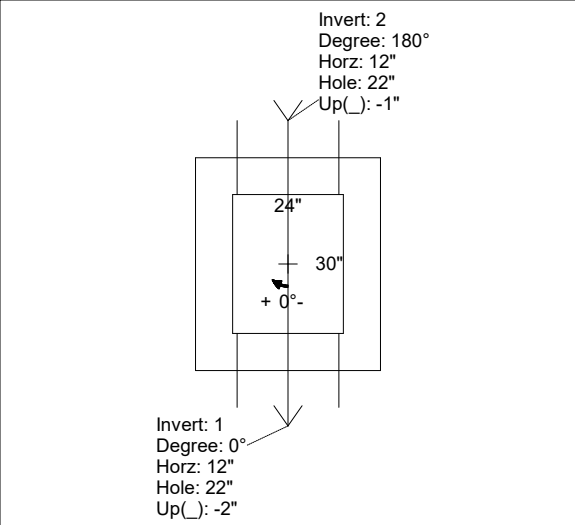

Invert: 2
Degree: 180°
Horz: 12"
Hole: 22"
Up(_): -1"

Invert: 1
Degree: 0°
Horz: 12"
Hole: 22"
Up(_): -2"


UPSIDE-DOWN VIEW (int. dimensions)

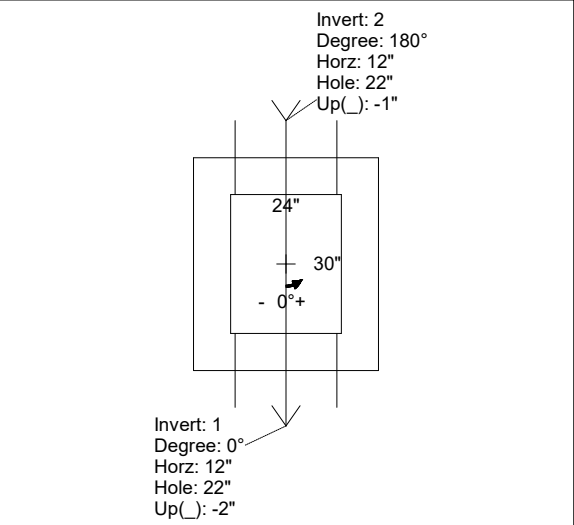

Invert: 2
Degree: 180°
Horz: 12"
Hole: 22"
Up(_): -1"

Invert: 1
Degree: 0°
Horz: 12"
Hole: 22"
Up(_): -2"

INSIDE WALL DIMENSIONS

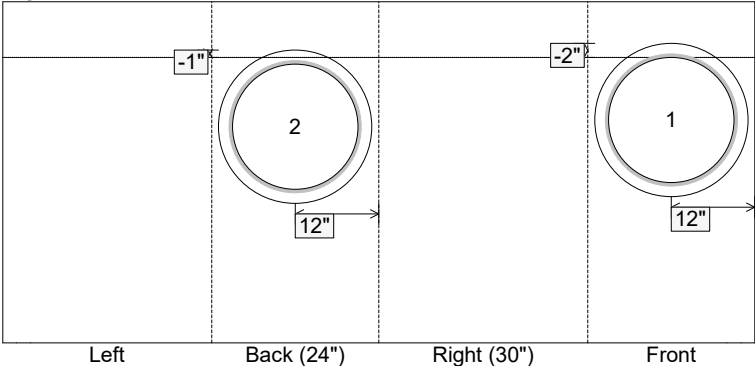

Left Back (24") Right (30") Front

EXT

(P1)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 41" Height (Ext): 49"	Weight (Net): 4578 lb Volume (Net): 1.17cu.yd
----------------------------------	-------------------------------	--	--	--