

Contractor: Mick-Murf Construction Inc.

TECH: Jared - F

Plant: 100



Size: 18"

Rim to Invert: 0'

Floor Height: 0"


Slack: 6"

REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W

1) CASTING - HOE KY-328 SET (DBI 3)

328 lb

Structure Total: 4094 lb

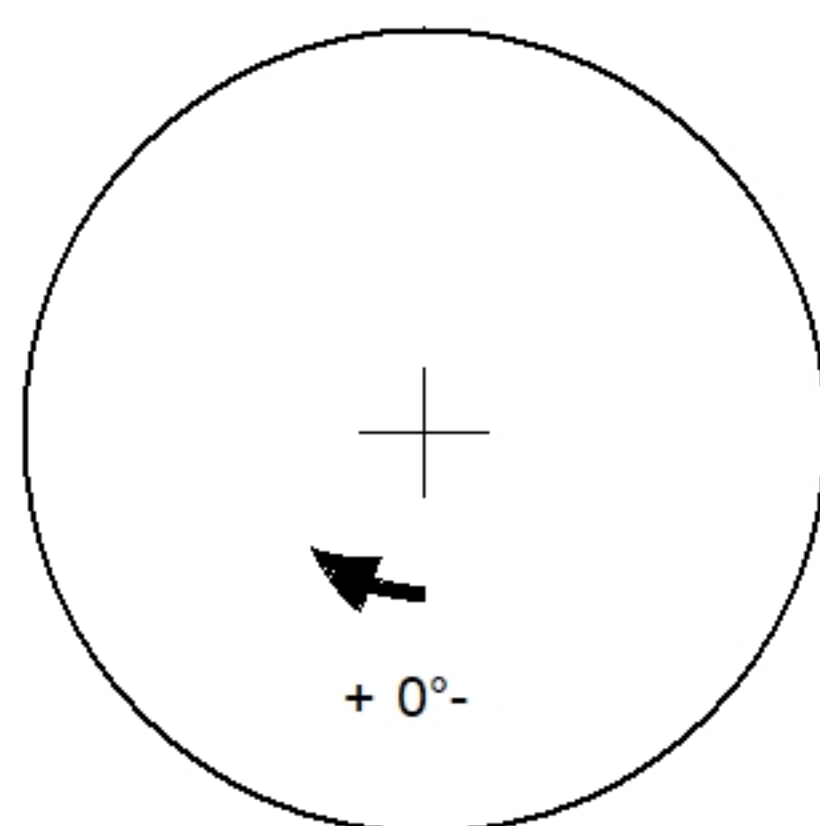

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	2'							
Reducer								
Invert 1								
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

18" - SLOPED & FLARED HEADWALL - 18" - (P1)

(P1)

[illegible]

Submittal Drawing
8/27/2026 12:40:55 PM

SUBMITTAL
APPROVED BY: