

Contractor: Jim Smith Contracting Co, LLC

TECH: J. Horsley

Plant: 100



Size: 24" x 24"

Rim to Invert: 5.76'



Floor Height: 8"

Slack: 0.12"

REINFORCING PER ASTM A615 (GRADE 60).

- TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 9027 lb

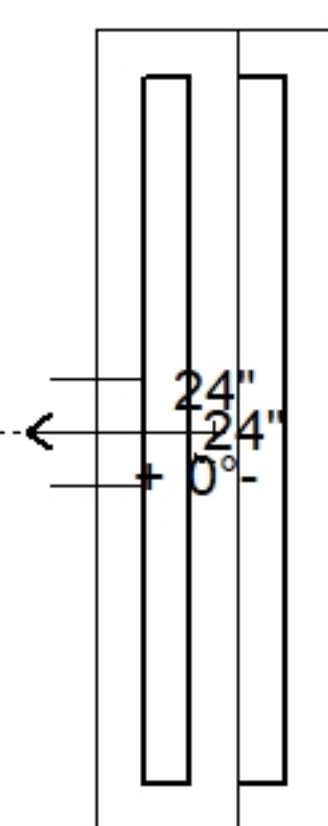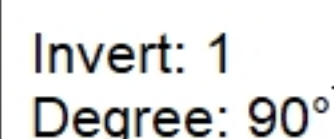

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	372.79'							
Reducer								
Invert 1	367.03'	90°	15" CMP	16"	18"	Hole 18	-1.5"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								


8" x 120" - CB INLET KY B 10' TOP F/G - 9" - (P4)

24" x 120" - CB INLET KY B 10' BOTTOM LEFT T/G - 17" - (P3)

=24" x 24" - FIELD ADJUSTMENT - 2" - (P2)

24" x 24" - BOX BASE 8inW. 8inF. Variable Ht F/n - 41" - (P1)

Cast (Int. Dim.) - Interior Dimensions

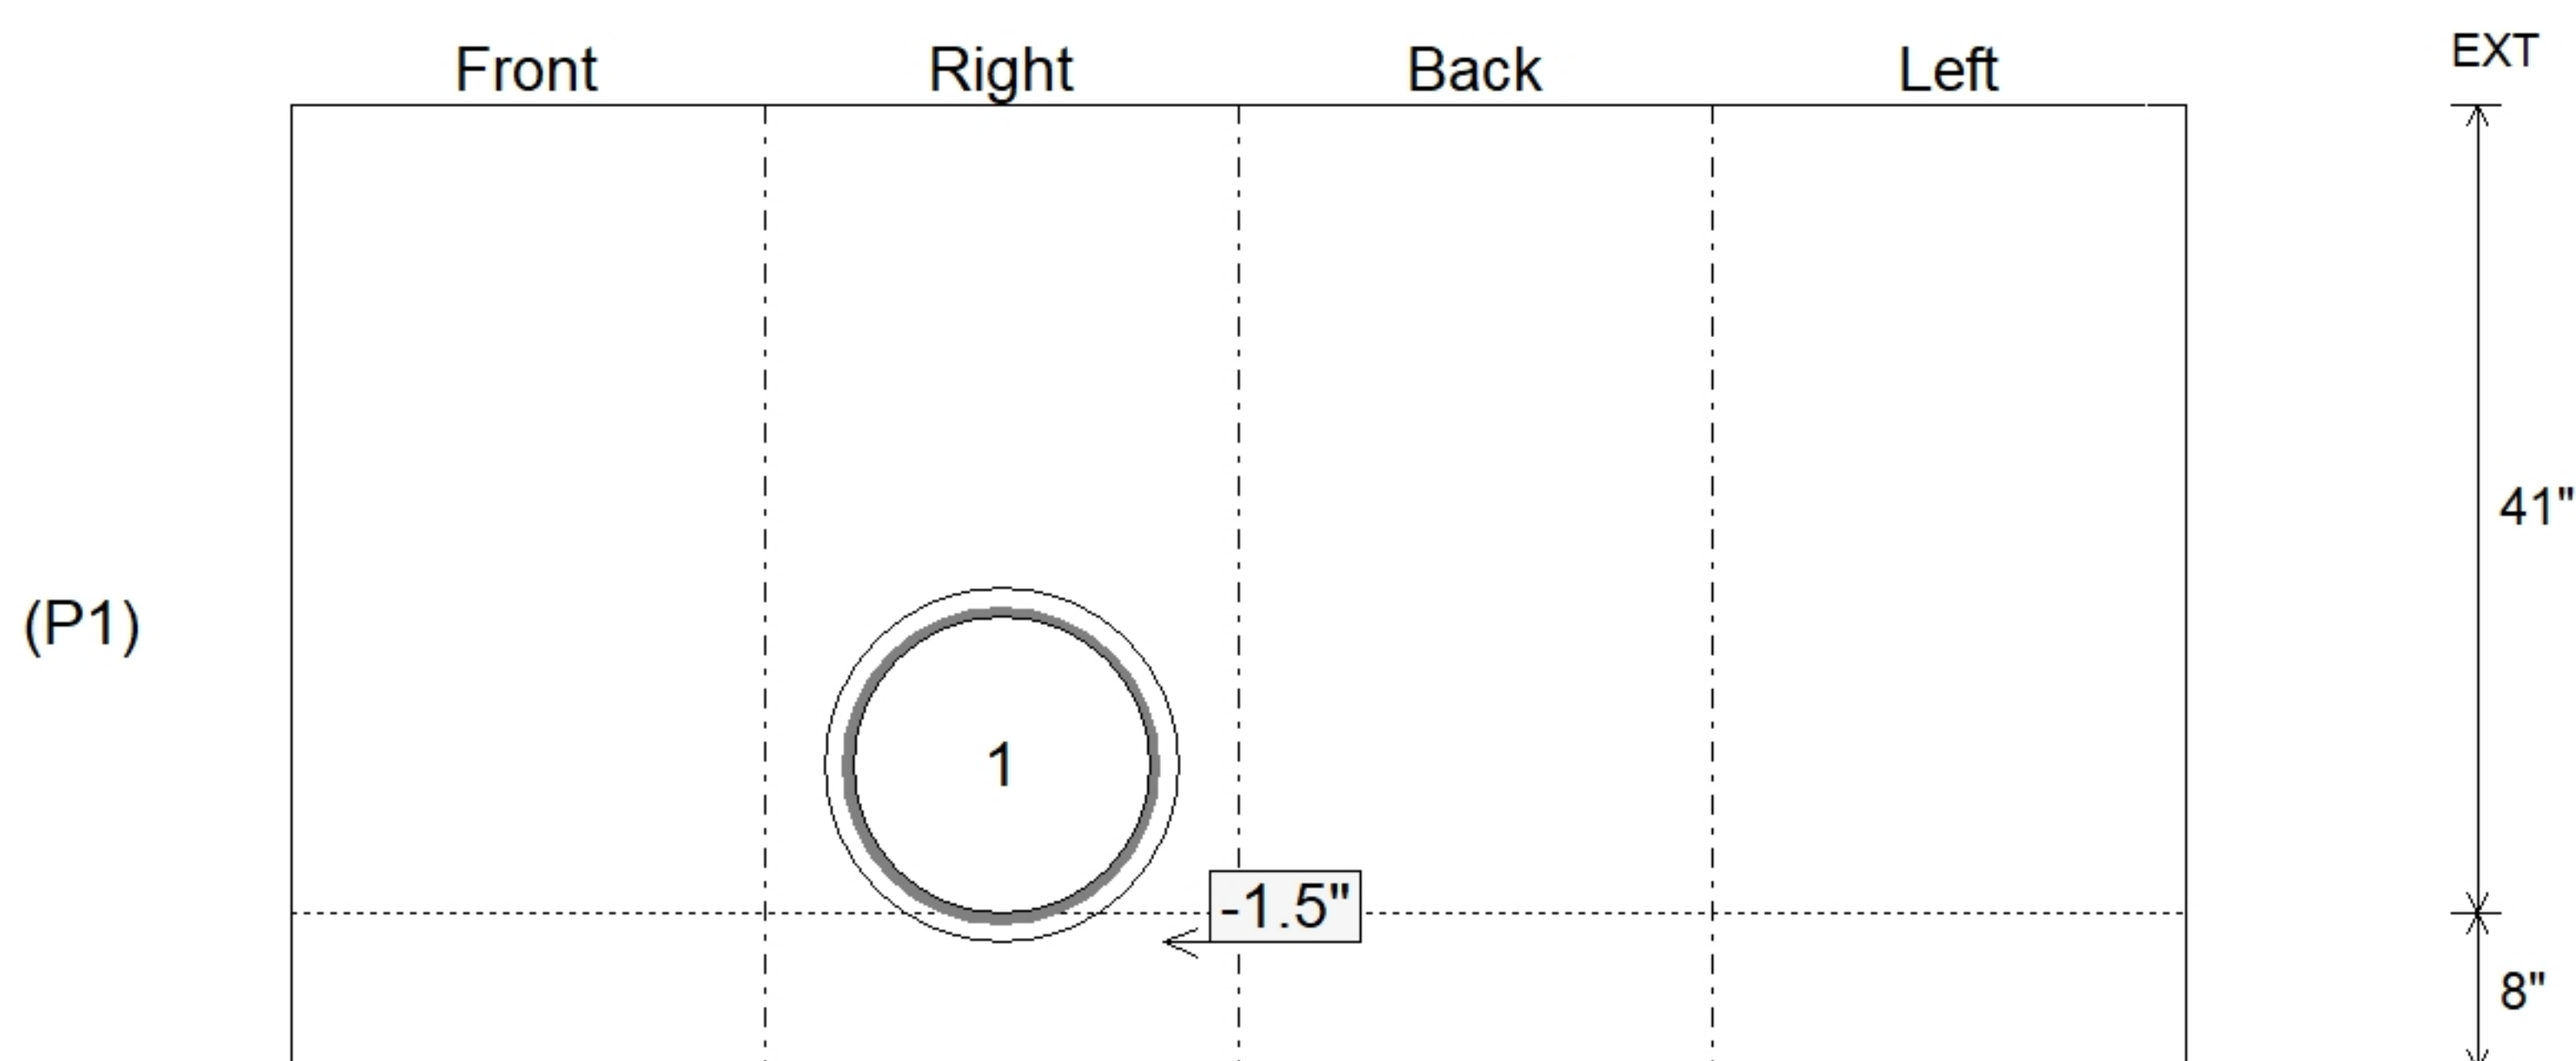

Submittal Drawing
6/12/2026 7:48:32 AM

SUBMITTAL
APPROVED BY: