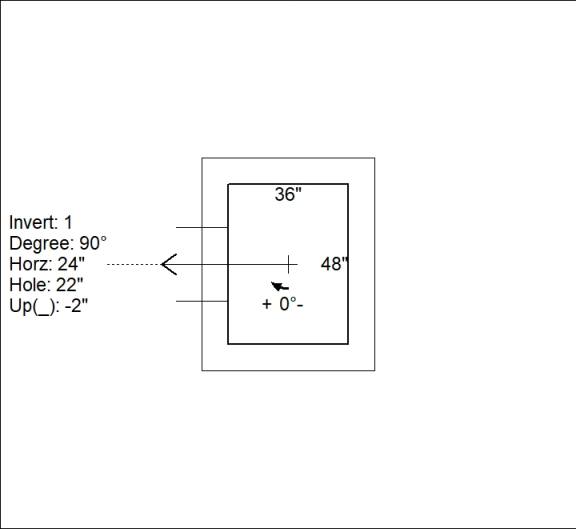
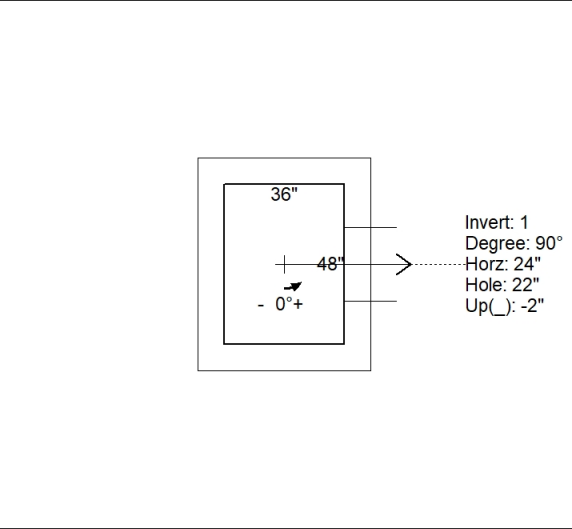
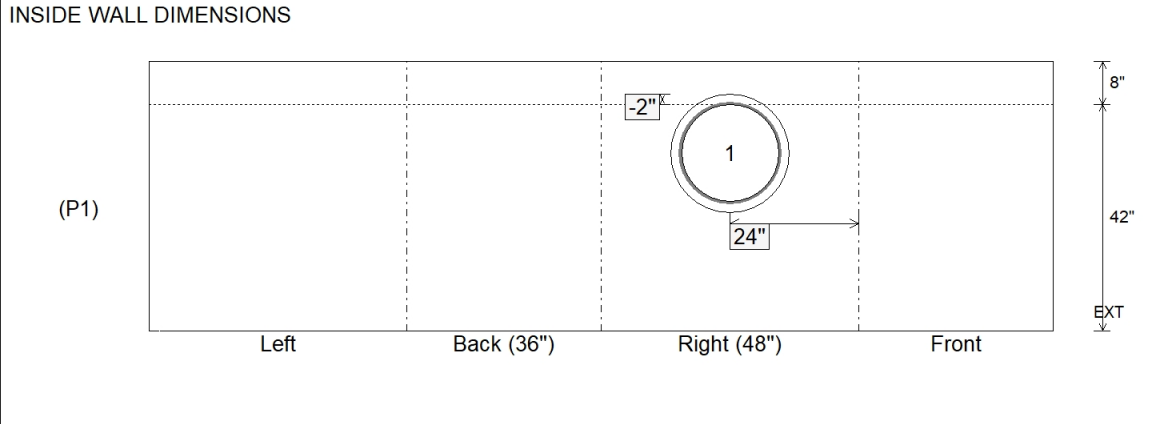


Job Name: 26-2030 - KYTC McCracken Co. Call 111 (ID 264505) Job Location: Paducah, KY Contractor: Jim Smith Contracting Co, LLC				Plant: 100 6/12/2026 7:49:46 AM		Tech: J. Horsley PC: J. Jarvis					
Structure ID: 165+47 S3 DBI5E											
P1		BX3648-08BA42		BOX BASE 8inW, 8inF F/n							
P2) 36" x 48" - P.I.P. - BY OTHERS - 8" P1) 36" x 48" - BOX BASE 8inW, 8inF F/n - 42" 1) CASTING - HOE KY-460 SET (DBI 5E) 1) 36" x 48" - Conseal CS-102 1.00" 1) Hole - 22"				0 lb 7618 lb 460 lb 0 lb 0 lb ----- Structure Total: 8078 lb		Structure Notes: . **KYTC STATE PROJECT** 1. KYTC DBI TYPE 5 / ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-460 (DBI 5E). 4. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C) REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 391.11'		Rim to Invert: 4.21'		Slack: 0.52"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	386.9'	90°	32"	18" CMP	19"	Hole 22	22"	22"	-2"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)  INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 42" Height (Ext): 50"		Weight (Net): 7618 lb Volume (Net): 1.95cu.yd	