




Structure ID: 51+03 LT HW4 HWSBO1

P1 HWSBO18

18" - SLOPED BOX OUTLET TYPE 1 F/F

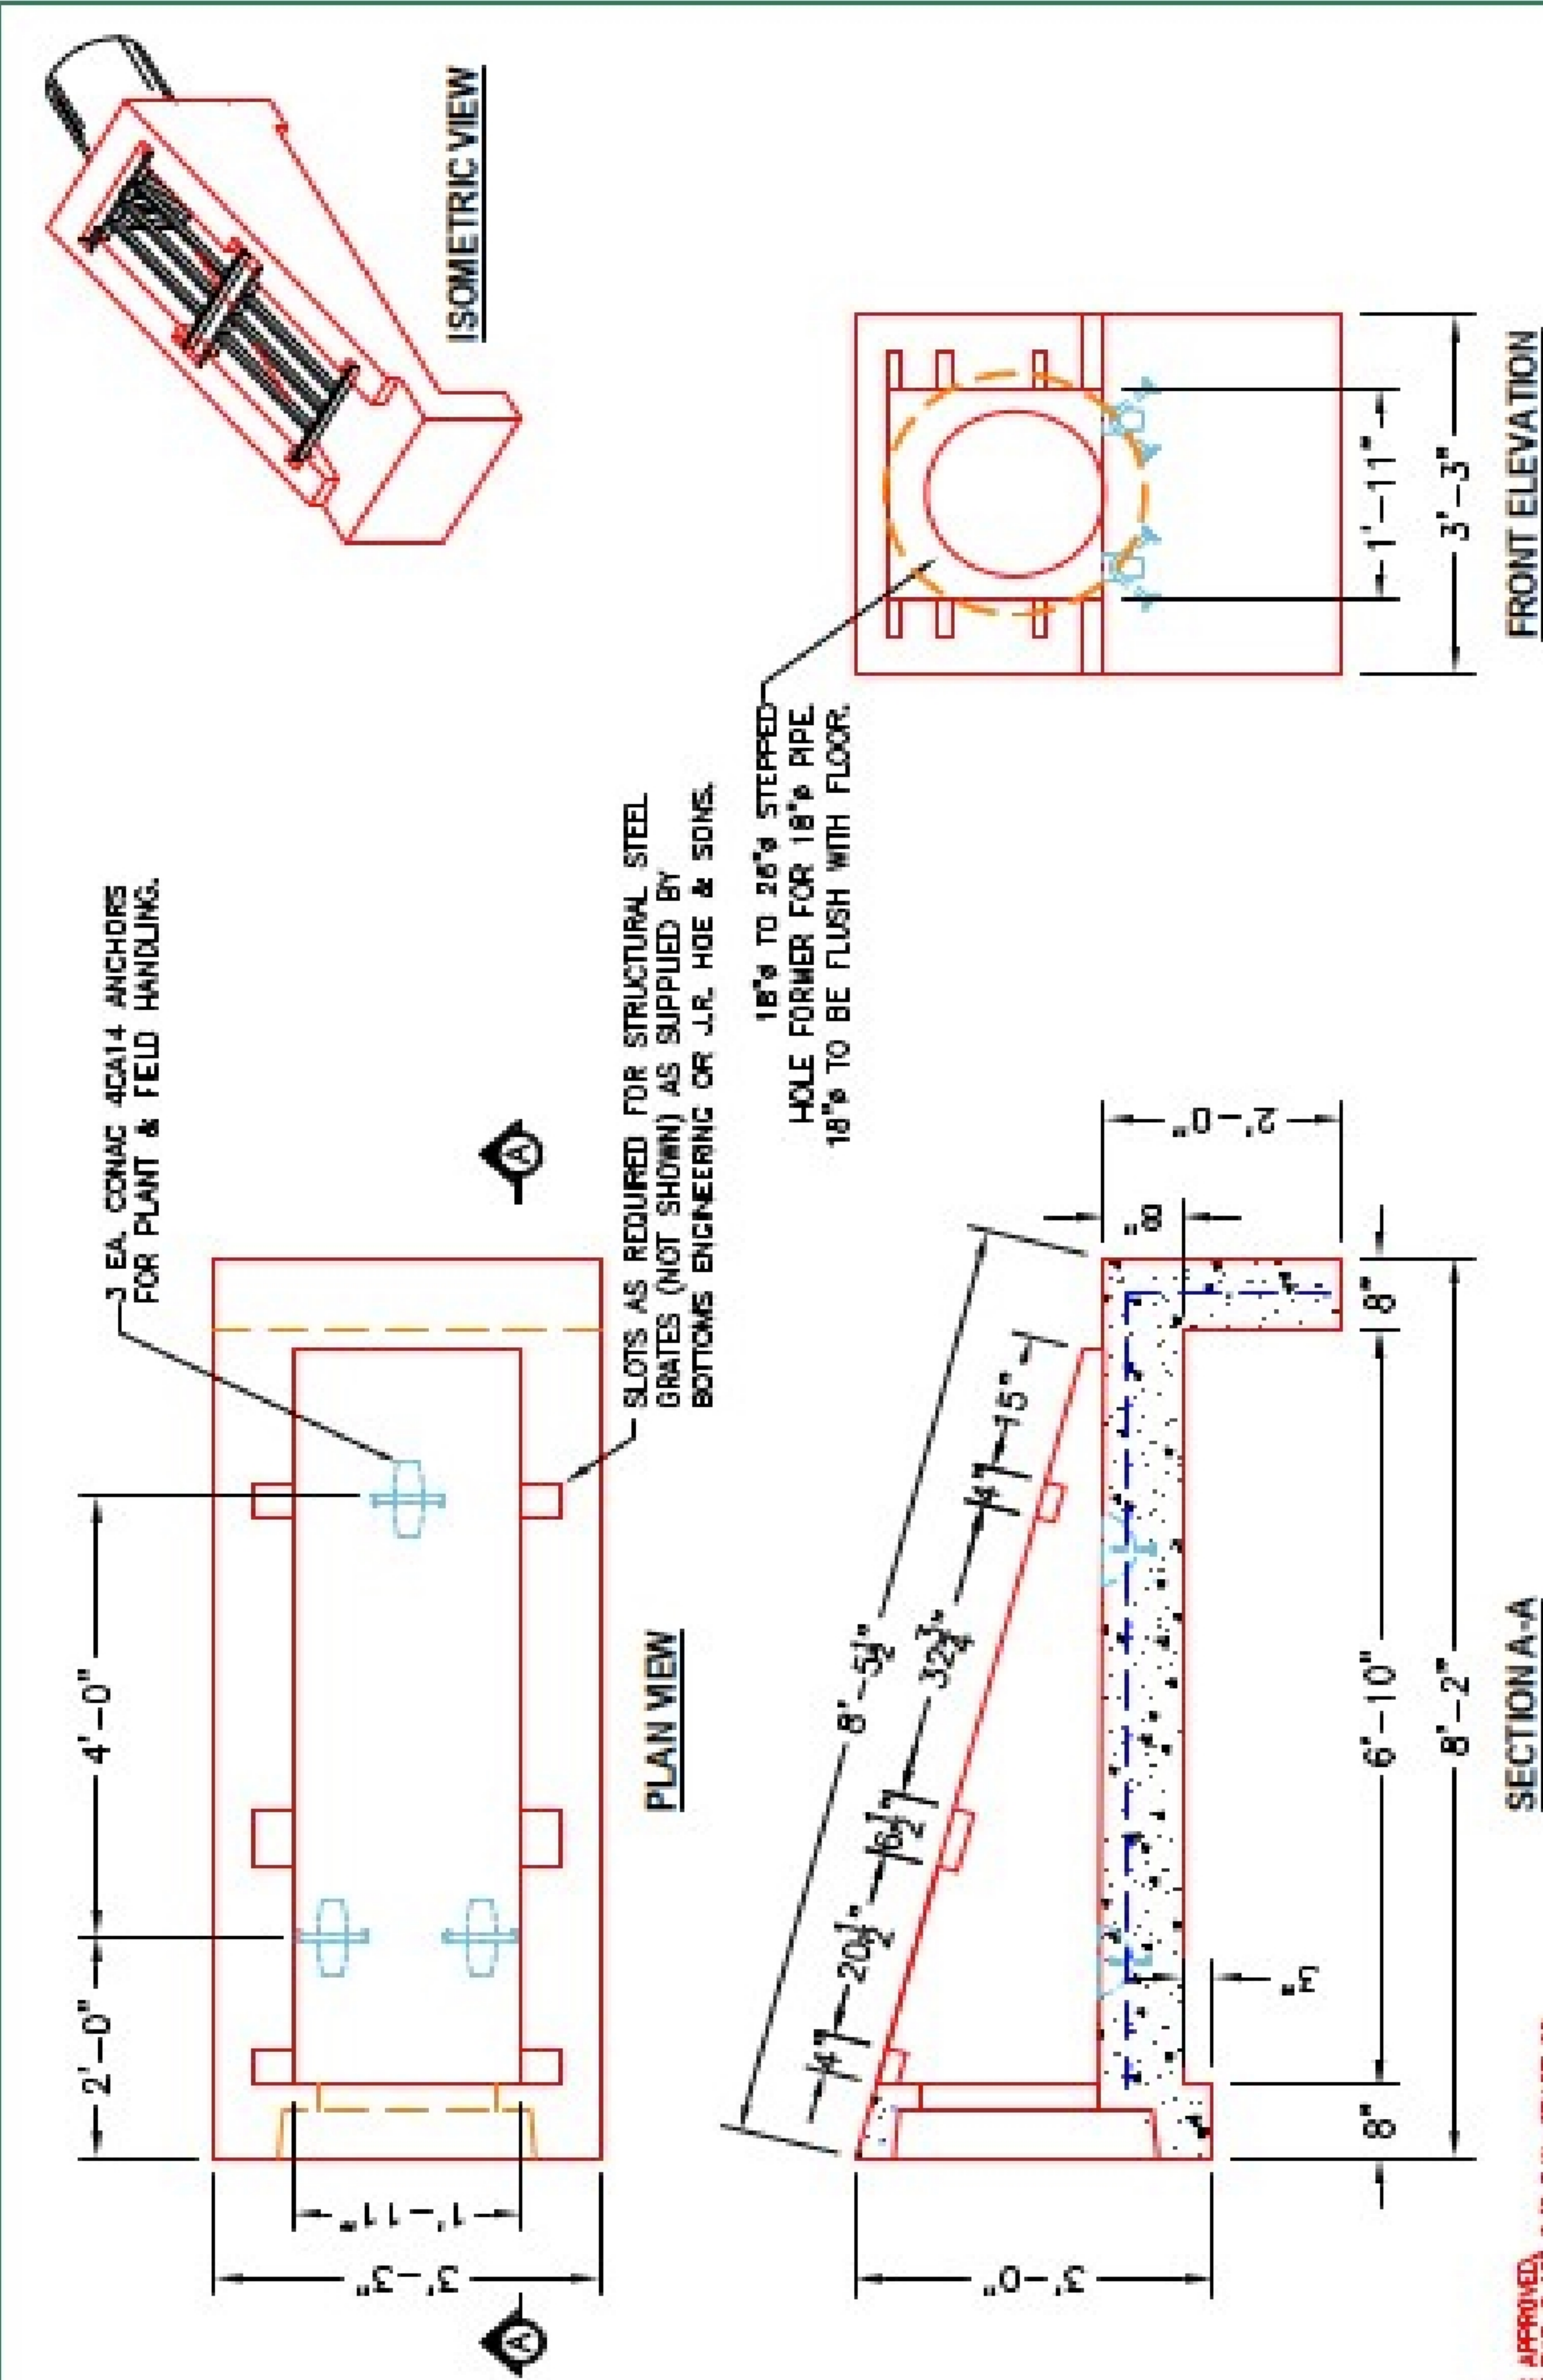

NOTES:

1. CONCRETE, KYTC APPROVED.
2. REINFORCING: #6 BAR @ 12" C/C E.W. - GRADE 60.
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR ROCKETS TO BE CRUISED WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWINGS R08-100-00 & R08-101-00 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. 2' DIAMETER ON ALL EXPOSED CORNERS.
7. PREFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3'-4'.

PRODUCTION WORK ORDER

QUALITY CONTROL CHECKLIST
☐ ALL DIMENSIONS CORRECT.
☐ LIFTERS INSTALLED.
☐ STEPPED IF CORRECT SIZE.
☐ REINFORCING CORRECT.
☐ SLOTS INSTALLED FOR GRATES.
☐ EDGES CHAMFERED.
☐ ALL PATCHWORK ACCEPTABLE.



PRODUCT I.D.: HWSBO18	DESCRIPTION: KYTC 18" SLOPED BOX OUTLET TYPE 1
PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: ??
PLANT: BEAVER DAM, KY.	PROJECT: ??
WEIGHT: 4,800 LBS.	STRUCTURE ID: ??
TOP SECTION JOINT: N/A	QUOTE/SALES ORDER NO: ??
BASE SECTION JOINT: N/A	P.C.: T. SEKULA
QC CHECK INITIALS:	DRAWING: N. RICHARDS
	DATE: 11/11/22
	SCALE: NTS
	PG. 1 of 1