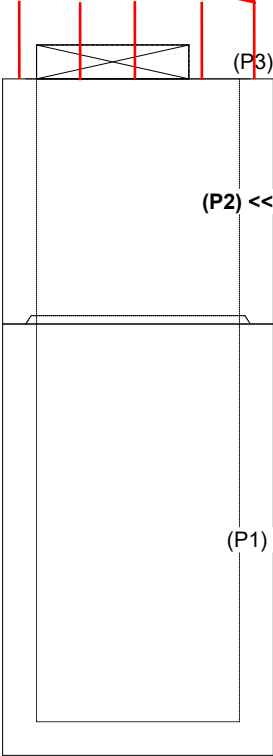

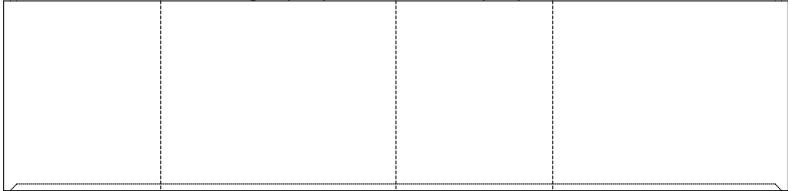


Job Name: 26-2038 - Sturgis Municipal Airport-Ph2 Job Location: Sturgis, KY Contractor: M. Bowling, Inc.				Plant: 100 7/31/2026 11:12:50 AM		Tech: Jared - F PC: A. Chambers					
Structure ID: C12 DBI7											
P2 BX4872-08RSVF		BOX RISER 8inW, Variable Ht F/G									
P3) 36" x 36" - P.I.P. - BY OTHERS - 8" P2) 48" x 72" - BOX RISER 8inW, Variable Ht F/G - 58" P1) 48" x 72" - BOX BASE 8inW, 8inF, Variable Ht T/n - 94" 1) CASTING - HOE KY-328 SET (DBI 7) 2) 48" x 72" - Conseal CS-102 1.00" 2) Hole - 62 2) Hole - 26				0 lb 10590 lb 15256 lb 328 lb 0 lb 0 lb 0 lb ----- 26174 lb Structure Total:		Structure Notes: 1. KYTC DBI TYPE 7 / PER ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C) 4. CASTING SUPPLIED BY ICAST (HOE KY-328 SET (DBI 7)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 368.83' Rim to Invert: 12.83' Slack: 0.96" Sump: 7" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
#5 DOWELS @ 12" O.C. STUBBED 20" OUT THE TOP OF THE WALLS 				RIGHT-SIDE UP VIEW (int. dimensions) 							
INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 58" Height (Ext): 58"		Weight (Net): 10590 lb Volume (Net): 2.7cu.yd	