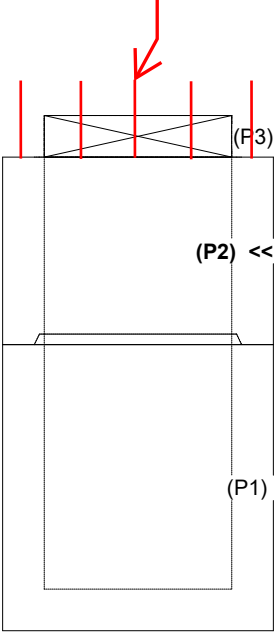
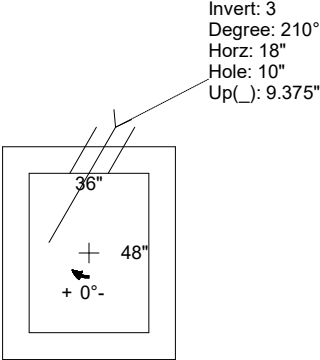
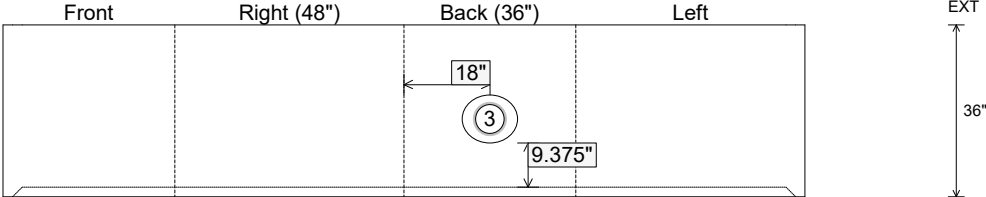


Job Name: 26-2038 - Sturgis Municipal Airport-Ph2 Job Location: Sturgis, KY Contractor: M. Bowling, Inc.					Plant: 100 7/31/2026 11:12:47 AM		Tech: Jared - F PC: A. Chambers																
Structure ID: D8 DBI2																							
P2 BX3648-08R-VH			BOX RISER 8inW F/G																				
P3) 36" x 48" - P.I.P. - BY OTHERS - 8" P2) 36" x 48" - BOX RISER 8inW F/G - 36" P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht T/n - 47" 1) CASTING - HOE KY-398 SET (DBI 2) 2) 36" x 48" - Conseal CS-102 1.00" 2) Hole - 40 1) Hole - 10					0 lb 4772 lb 6857 lb 398 lb 0 lb 0 lb 0 lb ----- Structure Total: 12028 lb		Structure Notes: 1. KYTC DBI TYPE 2 / ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. STUB #5 BARS 20" OUT TOP OF WALLS (SPA@12"C/C) 4. CASTING SUPPLIED BY ICAST (HOE KY-398 SET (DBI 2)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.																
Rim: 367.76' Rim to Invert: 7.17' Slack: 0.04" Sump: 5" Step Position:																							
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset													
Invert 1																							
Invert 2																							
Invert 3	365.2'	210°	30.625"	6" HDPE	6.9"	Hole 10	10"	11.547"	9.375"	-12"													
Invert 4																							
Invert 5																							
Invert 6																							
Invert 7																							
Invert 8																							
#5 DOWELS @ 12" O.C. STUBBED 20" OUT THE TOP OF THE WALLS 												RIGHT-SIDE UP VIEW (int. dimensions) 											
INSIDE WALL DIMENSIONS 																							
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 36" Height (Ext): 36"		Weight (Net): 4772 lb Volume (Net): 1.22cu.yd														