



Job Name: 26-2074 - Christian Co. Ball Field Line K Job Location: Hopkinsville, KY Contractor: Herring Construction, Inc.					Plant: 100 5/8/2026 6:13:35 AM		Tech: J. Horsley PC: E. Bradley			
Structure ID: KST1 ST-MH										
P1 MH060BAVF			MH BASE Custom Ht T/n							
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13" P1) 60" - MH BASE Custom Ht T/n - 60" 1) CASTING - HOE MC-315 F/C Storm 1) 60" - Conseal CS-102 1.00" 2) Hole - 44 1) Hole - 24 1) Hole - 16 5) MH Step ML-10-TDS-NCR - 10"						0 lb 270 lb 2869 lb 6978 lb 258 lb 0 lb 0 lb 0 lb 0 lb 0 lb 10375 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. NO STORM INVERT 5. STEPS AT 299 DEGREES 6. HOE MC-315 FRAME & COVER "STORM" SUPPLIED BY ICAST		
Rim: 543' Rim to Invert: 6.83' Slack: 0.81" Sump: 2.85" Step Position: 299										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	536.17'	0°	0"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"
Invert 2	537.5'	90°	56.5"	18" HDPE	21.2"	Hole 24	24"	24.691"	17.25"	0"
Invert 3	536.17'	180°	113.125"	36" HDPE	41.7"	Hole 44	44"	49.393"	0"	0"
Invert 4	538.2'	270°	169.625"	12" HDPE	14.5"	Hole 16	16"	16.196"	26"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

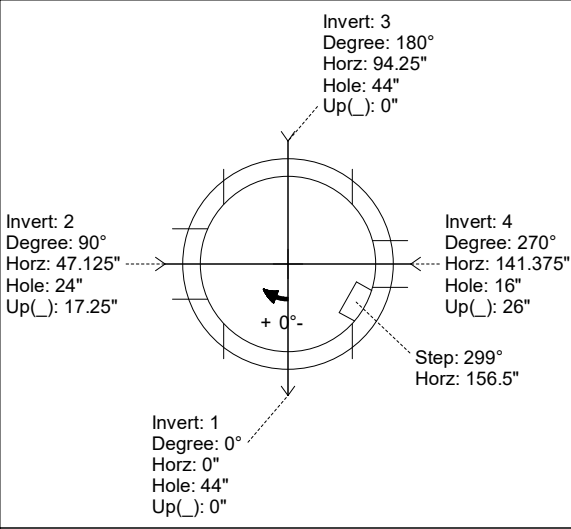

UPSIDE-DOWN VIEW (int. dimensions)

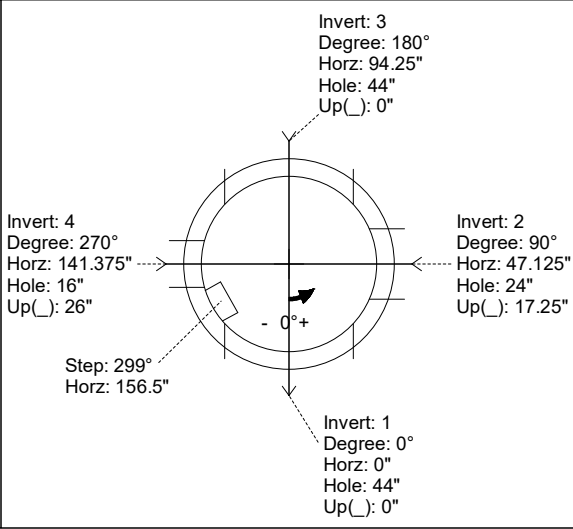

INSIDE WALL DIMENSIONS

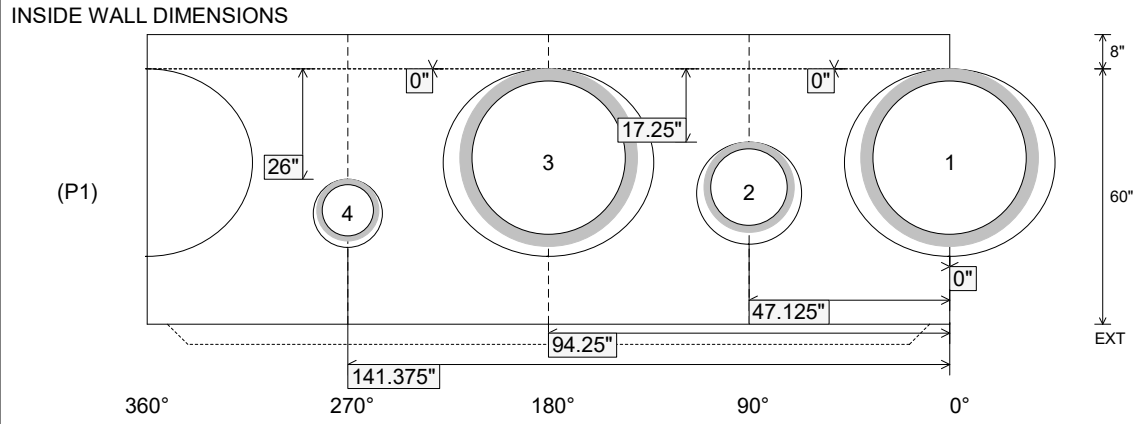

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 60" Height (Ext): 68"	Weight (Net): 6978 lb Volume (Net): 1.78cu.yd
----------------------------------	---------------------------------	--	--	--