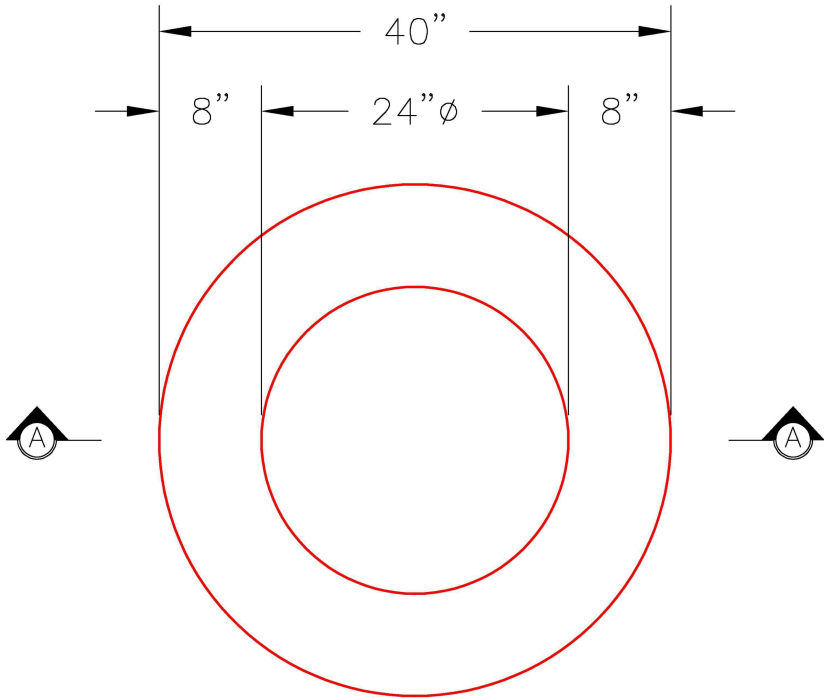
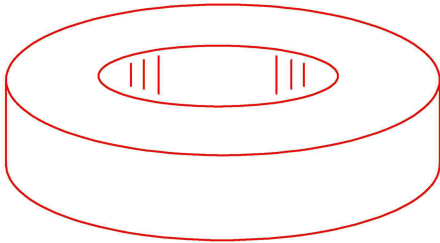
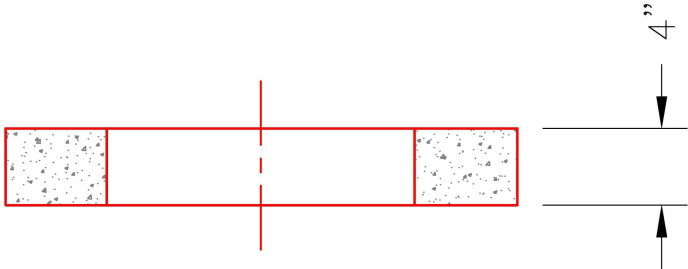


Job Name: 26-2074 - Christian Co. Ball Field Line K		Plant: 100	Tech: J. Horsley	
Job Location: Hopkinsville, KY		5/8/2026 6:13:57 AM	PC: E. Bradley	
Contractor: Herring Construction, Inc.				
Structure ID: KST1 ST-MH				
P3 GR4		GRADE RING F/F		
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13" P1) 60" - MH BASE Custom Ht T/n - 60" 1) CASTING - HOE MC-315 F/C Storm 1) 60" - Conseal CS-102 1.00" 2) Hole - 44 1) Hole - 24 1) Hole - 16 5) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 2869 lb 6978 lb 258 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 10375 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: (1) #3 HOOP CENTERED (GRADE 60)	
Structure Total:				
 PLAN VIEW  ISOMETRIC VIEW  SECTION A-A				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd