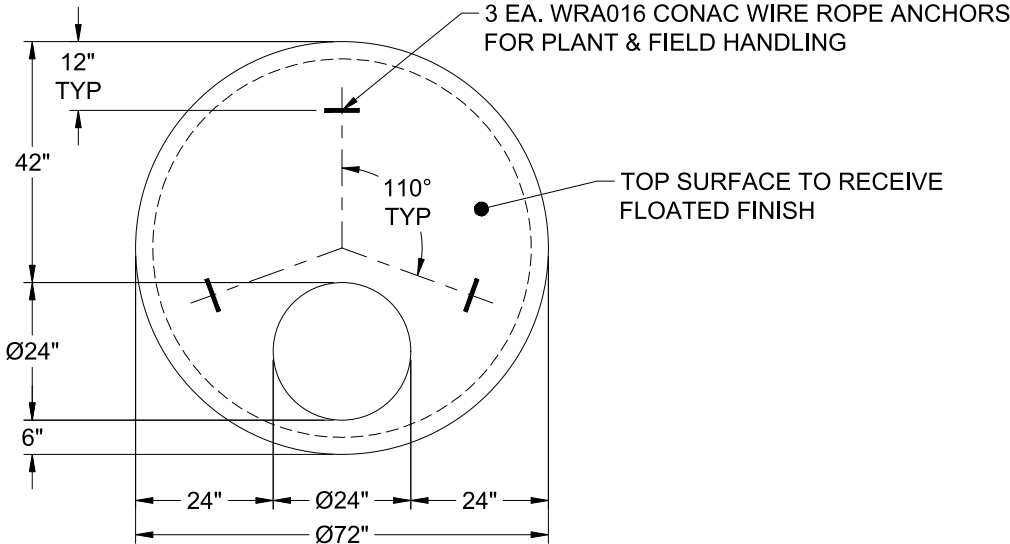
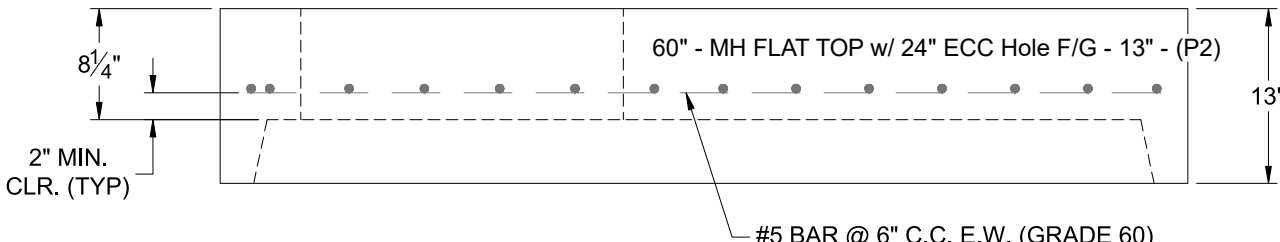


Job Name: 26-2076 - Middletown Community Center		Plant: 100	Tech: Jared - A														
Job Location: Middletown, KY		5/14/2026 8:56:20 AM	PC: T. Lewis														
Contractor: Core & Main LP (Lou)																	
Structure ID: 1+39.64 ST-MH																	
P2 MH060LD13		MH FLAT TOP w/ 24" ECC Hole F/G															
P3) 24" - CASTING HEIGHT - 7" P2) 60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13" P1) 60" - MH BASE Custom Ht T/n - 22" 1) CASTING - HOE MC-420 F/C Storm 1) 60" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 14 2) Hole - 12 2) MH Step ML-10-TDS-NCR - 10"		<table><tr><td>0 lb</td><td rowspan="10">Structure Notes:</td></tr><tr><td>2869 lb</td></tr><tr><td>4759 lb</td></tr><tr><td>340 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>0 lb</td></tr><tr><td>-----</td></tr><tr><td>Structure Total: 7968 lb</td></tr></table> 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE MC-420 FRAME & COVER "STORM" SUPPLIED BY ICAST 5. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH			0 lb	Structure Notes:	2869 lb	4759 lb	340 lb	0 lb	0 lb	0 lb	0 lb	0 lb	0 lb	-----	Structure Total: 7968 lb
0 lb	Structure Notes:																
2869 lb																	
4759 lb																	
340 lb																	
0 lb																	
0 lb																	
0 lb																	
0 lb																	
0 lb																	
0 lb																	

Structure Total: 7968 lb																	
																	
																	
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 6"	Height (Ext): 13"	Weight (Net): 2869 lb Volume (Net): 0.73cu.yd													