

Job Name: 26-2078 Lincoln & Coleman Street Sewer Job Location: Lawrenceburg, KY Contractor: Shouse Excavating					Plant: Beaver Dam 5/14/2026 1:15:59 PM		Tech: S. Felletter PC: C. Goff			
Structure ID: A1 SS-MH										
P1 MH048BAVF			MH BASE Custom Ht F/n							
P3) 24" - CASTING HEIGHT - 4" P2) 48" - MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F - 6" P1) 48" - MH BASE Custom Ht F/n - 17" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-285 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO 1) MH Step ML-10-TDS-NCR - 10"						0 lb 1102 lb 2422 lb 0 lb 0 lb 1440 lb 284 lb 0 lb 16 lb 0 lb ----- Structure Total: 5264 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MCS-285 "SAN" F/C). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 805.15' Rim to Invert: 2.14' Slack: 0.68" Sump: 2" Step Position: 0°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	803.01'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"
Invert 2	803.11'	270°	136.659"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	1.2"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)


UPSIDE-DOWN VIEW (int. dimensions)

INSIDE WALL DIMENSIONS


Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 17" Height (Ext): 23"	Weight (Net): 2422 lb Volume (Net): 0.62cu.yd
----------------------------------	-------------------------------	--	--	--

Job Name: 26-2078 Lincoln & Coleman Street Sewer Job Location: Lawrenceburg, KY Contractor: Shouse Excavating					Plant: Beaver Dam 5/14/2026 1:15:59 PM		Tech: S. Felletter PC: C. Goff				
Structure ID: A1 SS-MH											
P1 MH048BAVF		MH BASE Custom Ht F/n									
P3) 24" - CASTING HEIGHT - 4" P2) 48" - MH FLAT TOP SPEC. HT. (6") w/24" ECC Hole F/F - 6" P1) 48" - MH BASE Custom Ht F/n - 17" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-285 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO 1) MH Step ML-10-TDS-NCR - 10"					0 lb 1102 lb 2422 lb 0 lb 0 lb 1440 lb 284 lb 0 lb 16 lb 0 lb ----- Structure Total: 5264 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MCS-285 "SAN" F/C). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 805.15' Rim to Invert: 2.14' Slack: 0.68" Sump: 2" Step Position: 0°					Invert channel drawing Full height invert						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	803.01'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"	
Invert 2	803.11'	270°	136.659"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	1.2"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

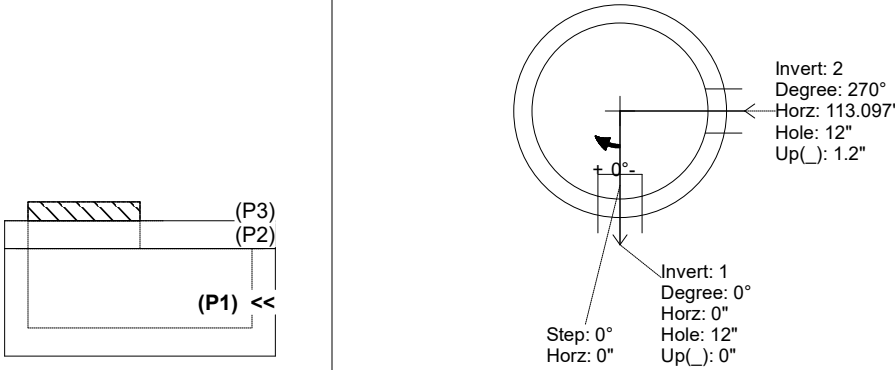

UPSIDE-DOWN VIEW (int. dimensions)

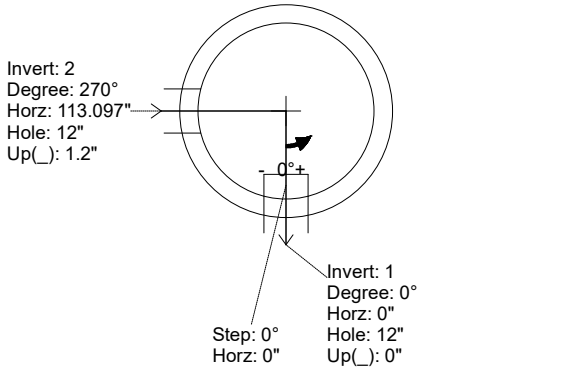

INSIDE WALL DIMENSIONS

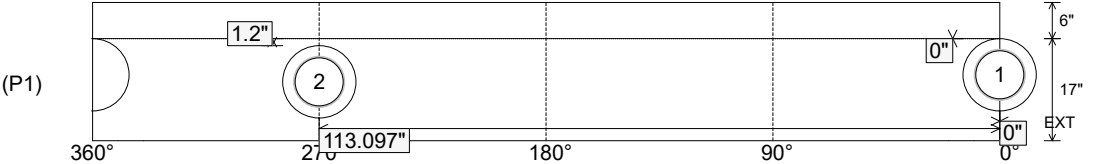

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 17" Height (Ext): 23"	Weight (Net): 2422 lb Volume (Net): 0.62cu.yd
----------------------------------	-------------------------------	--	--	--