


Job Name: 26-2080 - The Cumberland
Job Location: Bowling Green, KY
Contractor: J & J Concrete & Excavating, LLC

Plant: 100

6/22/2026 6:26:06 PM

Tech: Jared - A

PC: E. Bradley



Structure ID: AR SS-ARV

P3 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G

- P4) 24" - CASTING HEIGHT - 7"
P3) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P2) 48" - MH DH RISER Custom Ht T/F - 45"
P1) 48" - P.I.P. BY OTHERS - BTM SLAB F/n - 0"
1) CASTING - HOE MC-375 F/C Sanitary
2) 48" - Conseal CS-102 1.00" (Double)
1) 24" - Conseal CS-102 1.00" (Double)
2) DOGHOUSE - 8"x10"
4) MH Step ML-10-TDS-NCR - 10"



Structure Total:

0 lb
1561 lb
3077 lb
0 lb
271 lb
0 lb
0 lb
0 lb
0 lb
0 lb

4909 lb

Structure Notes:

1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE MC-375 FRAME & COVER "SANITARY" SUPPLIED BY ICAST
5. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING

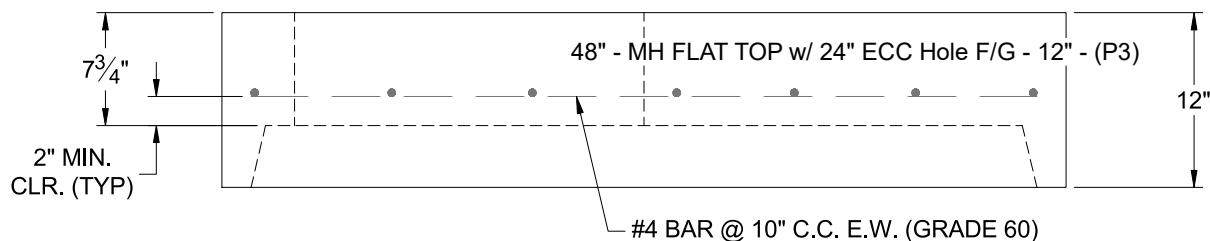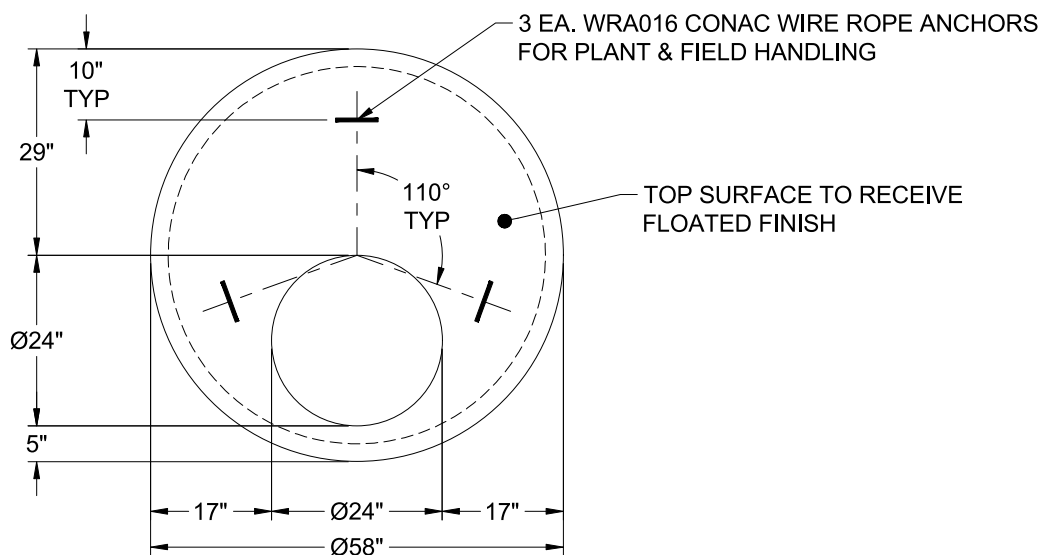

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1561 lb
Volume (Net): 0.42cu.yd