



Job Name: 26-2080 - The Cumberland Job Location: Bowling Green, KY Contractor: J & J Concrete & Excavating, LLC					Plant: 100 6/22/2026 6:23:30 PM		Tech: Jared - A PC: E. Bradley				
Structure ID: D2 ST-CI											
P1 MH048BA48			MH BASE T/n								
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x36" Hole F/G - 12" P1) 48" - MH BASE T/n - 48" 1) CASTING - HOE 525 SET (F/G/H) 1) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 20 4) MH Step ML-10-TDS-NCR - 10"					0 lb 1300 lb 4351 lb 442 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 6093 lb Structure Total: 6093 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 125 DEGREES 5. HOE 525 FRAME, FLAT GRATE, & CURB HOOD SUPPLIED BY ICAST				
Rim: 530.69' Rim to Invert: 5.6' Slack: 1.2" Sump: 0" Step Position: 125°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	525.09'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	-1.625"	0"	
Invert 2	525.09'	183°	92.625"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.25"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

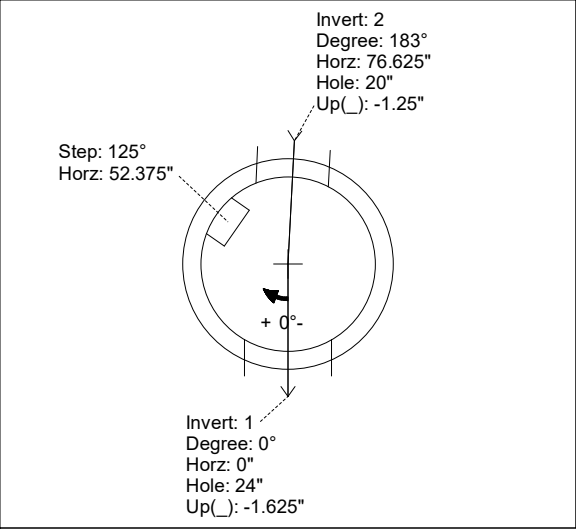

UPSIDE-DOWN VIEW (int. dimensions)

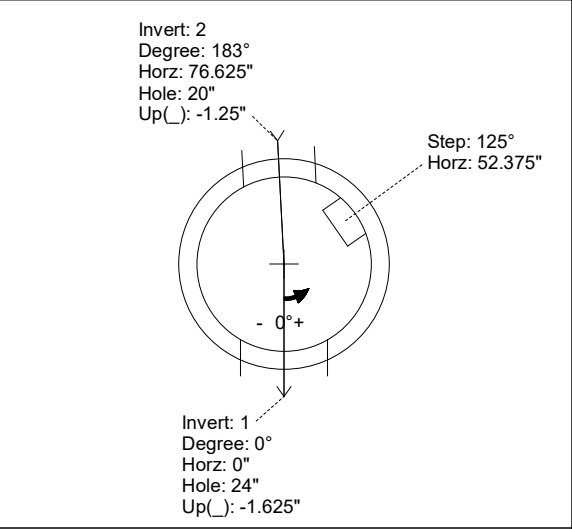

INSIDE WALL DIMENSIONS

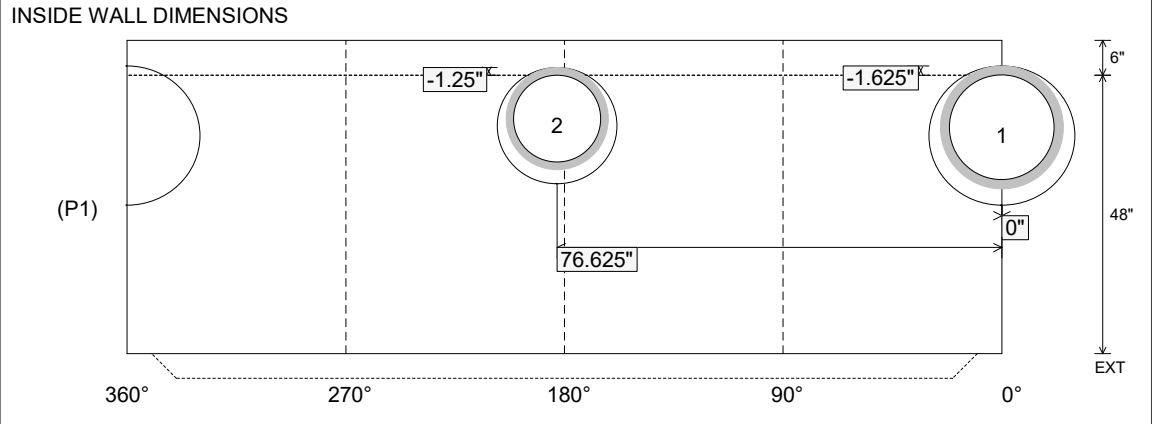

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 48" Height (Ext): 54"	Weight (Net): 4351 lb Volume (Net): 1.11cu.yd
----------------------------------	---------------------------------	--	--	--