

Job Name: 26-2090 - Monroe Co Area Tech Center Renovation  
Job Location: Tompkinsville, KY  
Contractor: Lindsey's Dirt Works LLC

Plant: 100

7/20/2026 6:20:12 PM

Tech: Jared - F  
PC: M. Sullivan



## Structure ID: 3 ST-MH

**P3 MH048LD07ECC**

**MH FLAT TOP w/ 24" ECC Hole F/F**



- P4) 24" - CASTING HEIGHT - 7"  
P3) 48" - MH FLAT TOP w/ 24" ECC Hole F/F - 7"  
P2) 48" - MH RISER F/G - 36"  
P1) 48" - MH BASE T/n - 42"  
1) CASTING - HOE MC-375 F/C Storm  
2) 48" - Conseal CS-102 1.00"  
1) 24" - Conseal CS-102 1.00"  
1) Hole - 16  
1) Hole - 6  
1) Hole - 10  
7) MH Step ML-10-TDS-NCR - 10"

Structure Total: 8206 lb

### Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE MC-375 F/C STORM).

REINFORCING PER ASTM A615 (GRADE 60).  
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.  
- RISER/WALLS (As .12)  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

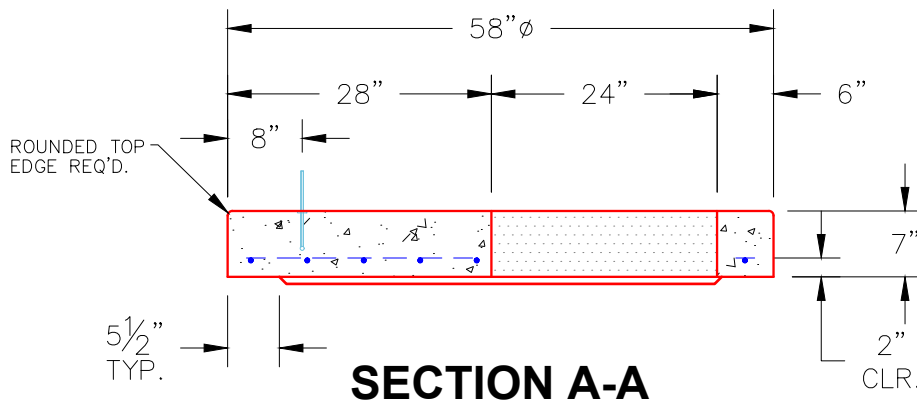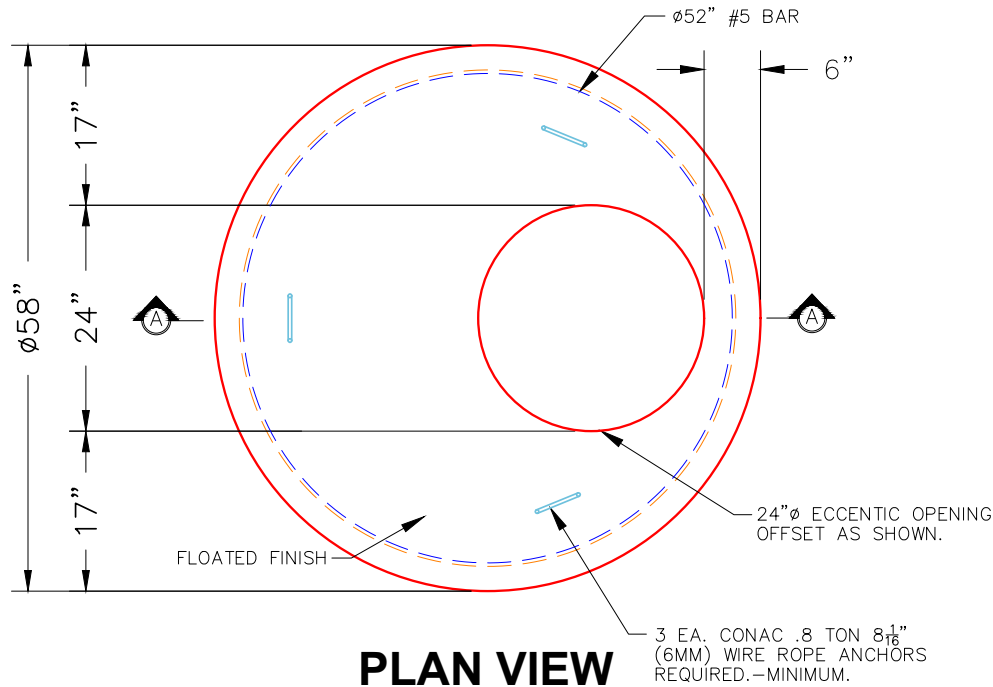

### NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 5"

Height (Ext): 7"

Weight (Net): 1286 lb  
Volume (Net): 0.33cu.yd