



Job Name: 26-2090 - Monroe Co Area Tech Center Renovation Job Location: Tompkinsville, KY Contractor: Lindsey's Dirt Works LLC					Plant: 100 7/20/2026 6:19:38 PM		Tech: Jared - F PC: M. Sullivan				
Structure ID: 6 ST-MH											
P1 MH048BA24		MH BASE T/n									
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING F/F - 4" P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12" P1) 48" - MH BASE T/n - 24" 1) CASTING - HOE MC-375 F/C Storm 1) 48" - Con Seal CS-102 1.00" 2) 24" - Con Seal CS-102 1.00" 1) Hole - 18 1) Hole - 16 2) MH Step ML-10-TDS-NCR - 10"					0 lb 270 lb 1561 lb 2812 lb 271 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 4914 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-375 F/C STORM). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 861.84' Rim to Invert: 4.02' Slack: 1.24" Sump: 0" Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	857.82'	0°	0"	12" HDPE	14.5"	Hole 18	18"	18.451"	-1.25"	0"	
Invert 2	857.92'	130°	65.75"	12" HDPE	14.5"	Hole 16	16"	16.312"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

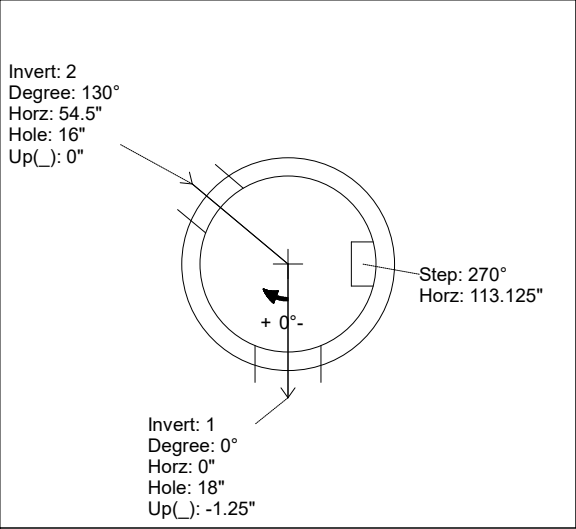

UPSIDE-DOWN VIEW (int. dimensions)

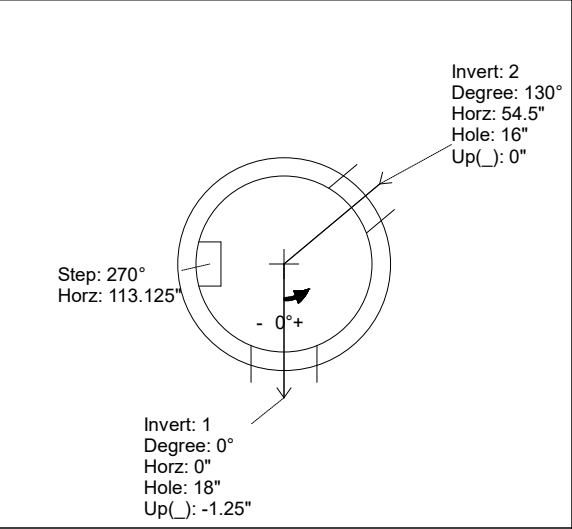

INSIDE WALL DIMENSIONS

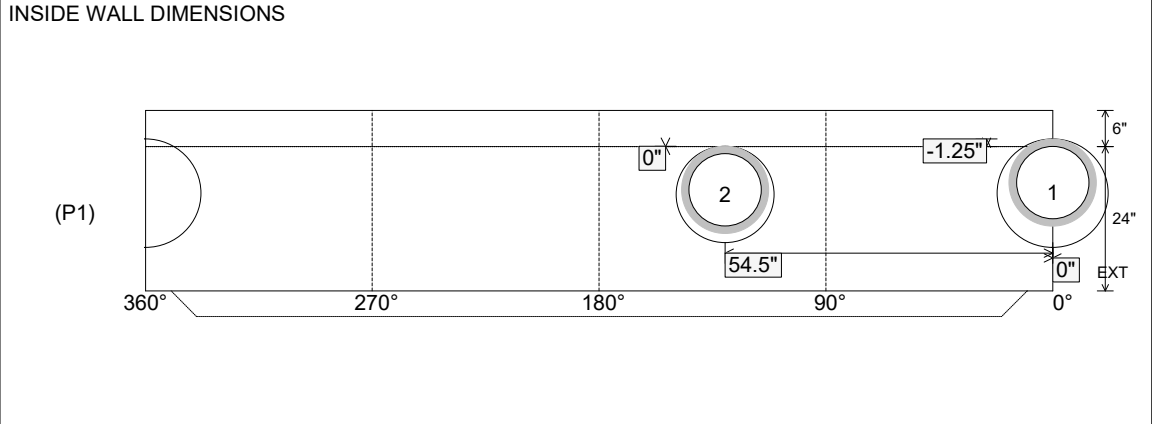

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2812 lb Volume (Net): 0.72cu.yd
----------------------------------	---------------------------------	--	--	--