


Floor (Bot): 477.843'
Overall Height: 5.417'
Slack: 1.8"


Structure Total: 5887 lb

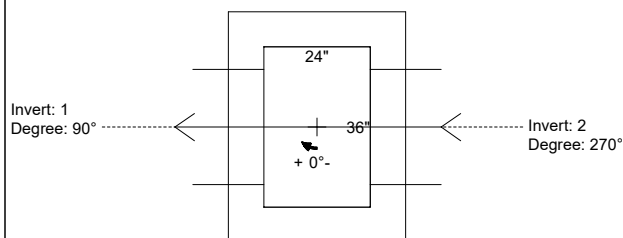

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	483.41'							
Reducer								
Invert 1	480.01'	90°	18" RCP B WALL	23"	26"	Hole 26	15.5"	P1
Invert 2	480.01'	270°	18" RCP B WALL	23"	26"	Hole 26	15.5"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 36" - CASTING HEIGHT - 6" - (P2)

24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 51" - (P1)

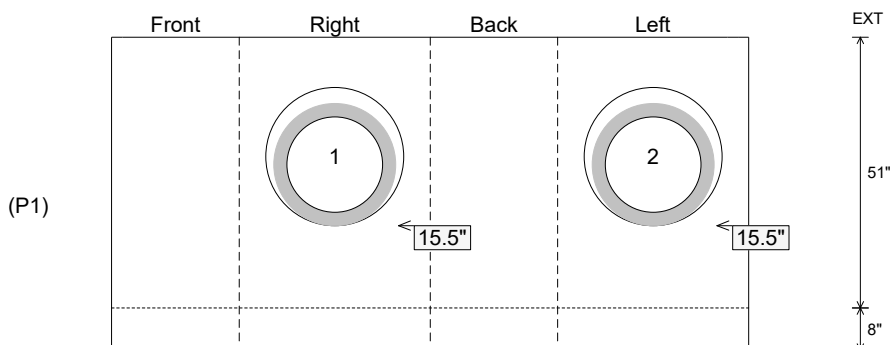

SUBMITTAL
APPROVED BY: