



Job Name: 26-2104 - Jeffersonville High School Parking Lot Job Location: Jeffersonville, IN Contractor: Mac Construction & Excavating, Inc.					Plant: 100 6/27/2026 7:12:38 PM		Tech: Jared - A PC: T. Lewis				
Structure ID: 10 ST-CI											
P1 BX2436-08BVF BOX BASE 8inW, 8inF, Variable Ht F/n											
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 38" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 22 1) Hole - 18						0 lb 4515 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 4515 lb		Structure Notes: 1. PER ASTM C-913 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. STORM INVERT BY OTHERS 5. HOE 525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS			
Rim: 483.75' Rim to Invert: 3.65' Slack: 2.05' Sump: 2.25' Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	480.1'	270°	26"	15" RCP B WALL	19.5"	Hole 22	22"	22"	0"	0"	
Invert 2	480.1'	130°	31"	15" RCP B WALL	19.5"	Hole 22	22"	28.719"	0"	-9"	
Invert 3	480.35'	0°	20"	12" RCP B WALL	16"	Hole 18	18"	18"	3.25"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)



UPSIDE-DOWN VIEW (int. dimensions)

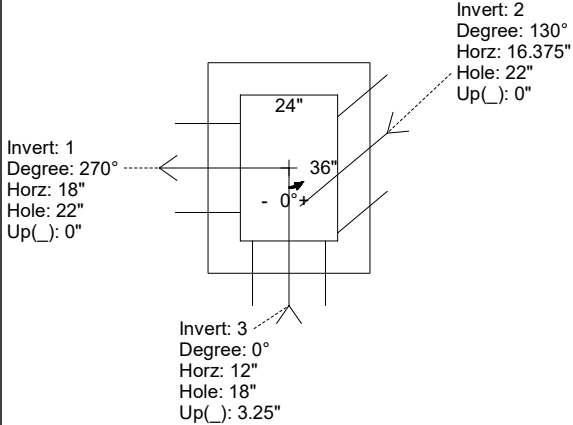

INSIDE WALL DIMENSIONS

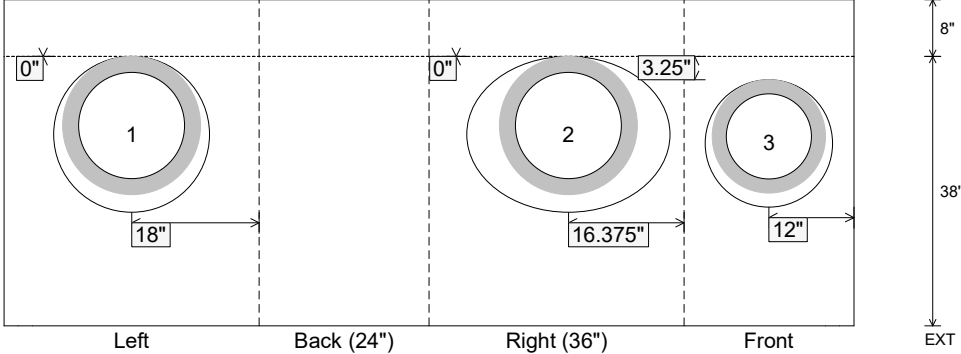

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 38" Height (Ext): 46"	Weight (Net): 4515 lb Volume (Net): 1.15cu.yd
----------------------------------	-------------------------------	--	--	--