



Job Name: 26-2104 - Jeffersonville High School Parking Lot Job Location: Jeffersonville, IN Contractor: Mac Construction & Excavating, Inc.					Plant: 100 6/27/2026 7:12:39 PM		Tech: Jared - A PC: T. Lewis				
Structure ID: 12 ST-CI											
P1 MH048BAVF		MH BASE Custom Ht F/n									
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x36" Hole F/F - 7" P1) 48" - MH BASE Custom Ht F/n - 52" 1) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 32 2) Hole - 22					0 lb 1044 lb 4270 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 5315 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STORM INVERT BY OTHERS 5. NO STEPS 6. HOE 525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS				
Rim: 482.61' Rim to Invert: 4.04' Slack: 1.48" Sump: 18" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	478.57'	0°	0"	24" RCP B WALL	30"	Hole 32	32"	35.027"	15"	0"	
Invert 2	478.57'	177°	89.625"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	15.75"	0"	
Invert 3	479.48'	267°	135.125"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	26.625"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)



UPSIDE-DOWN VIEW (int. dimensions)

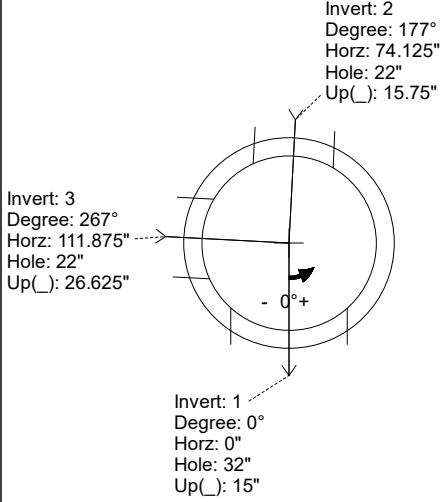

INSIDE WALL DIMENSIONS

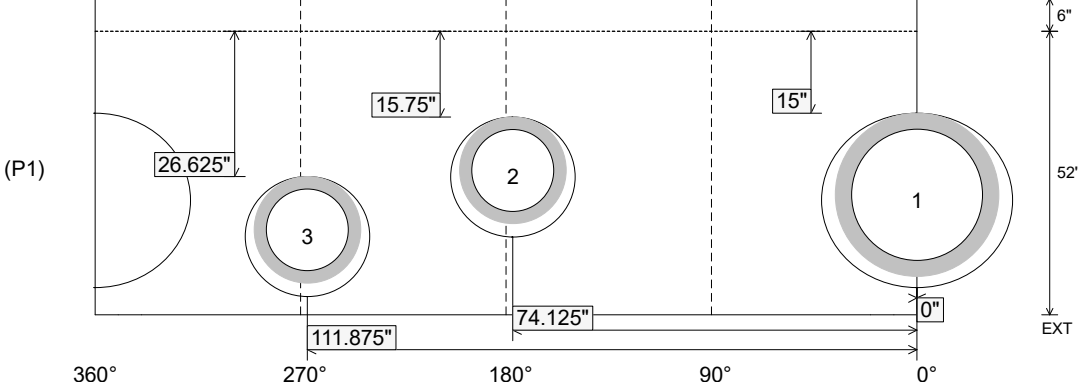

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 52" Height (Ext): 58"	Weight (Net): 4270 lb Volume (Net): 1.09cu.yd
----------------------------------	-------------------------------	--	--	--