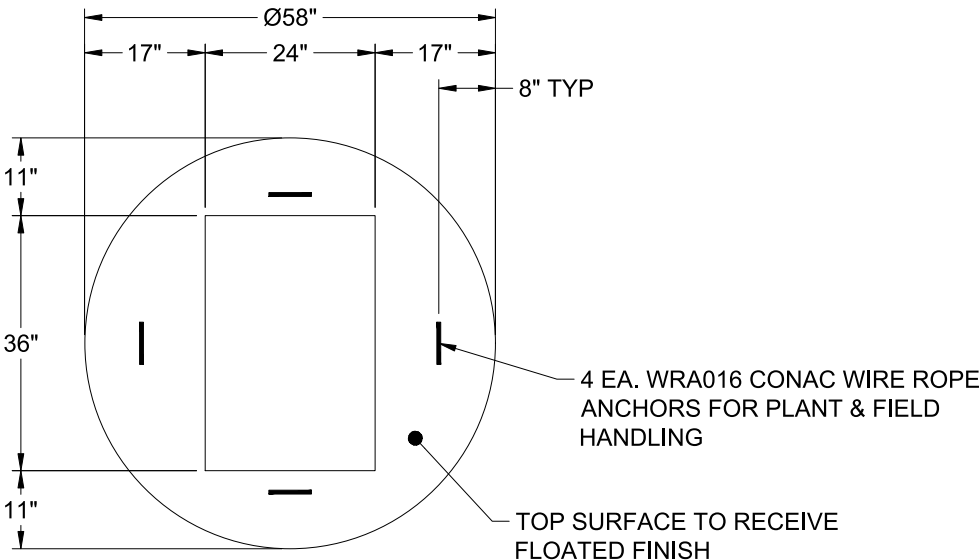
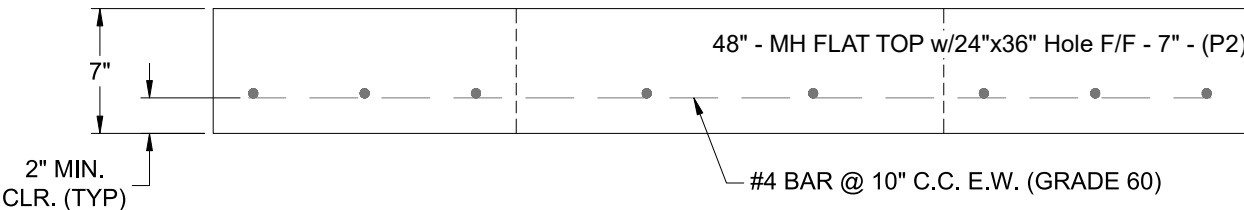


Job Name: 26-2104 - Jeffersonville High School Parking Lot		Plant: 100	Tech: Jared - A	
Job Location: Jeffersonville, IN		6/27/2026 7:13:17 PM	PC: T. Lewis	
Contractor: Mac Construction & Excavating, Inc.				
Structure ID: 14 ST-CI				
P2 MH048LD07-24X36RECT		MH FLAT TOP w/24"x36" Hole F/F		
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x36" Hole F/F - 7" P1) 48" - MH BASE Custom Ht F/n - 25" 1) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 22 3) Hole - 18		0 lb 1044 lb 2583 lb 0 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 3627 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #4 BAR @ 10" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE 525 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS 5. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 5"	Height (Ext): 7"	Weight (Net): 1044 lb Volume (Net): 0.27cu.yd