
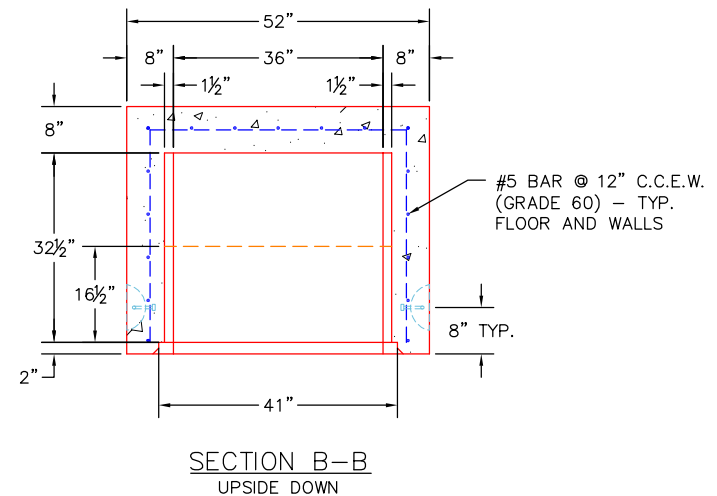
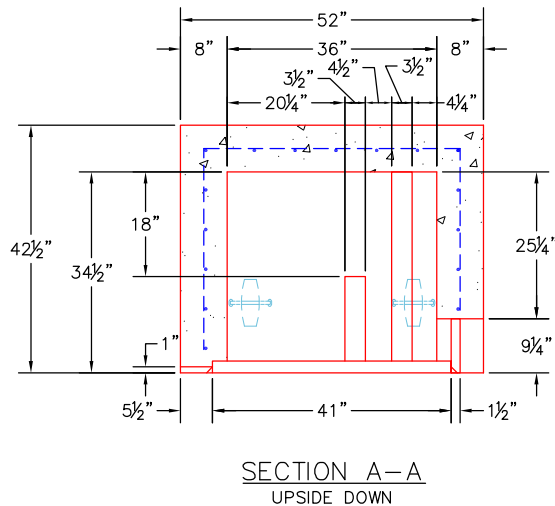


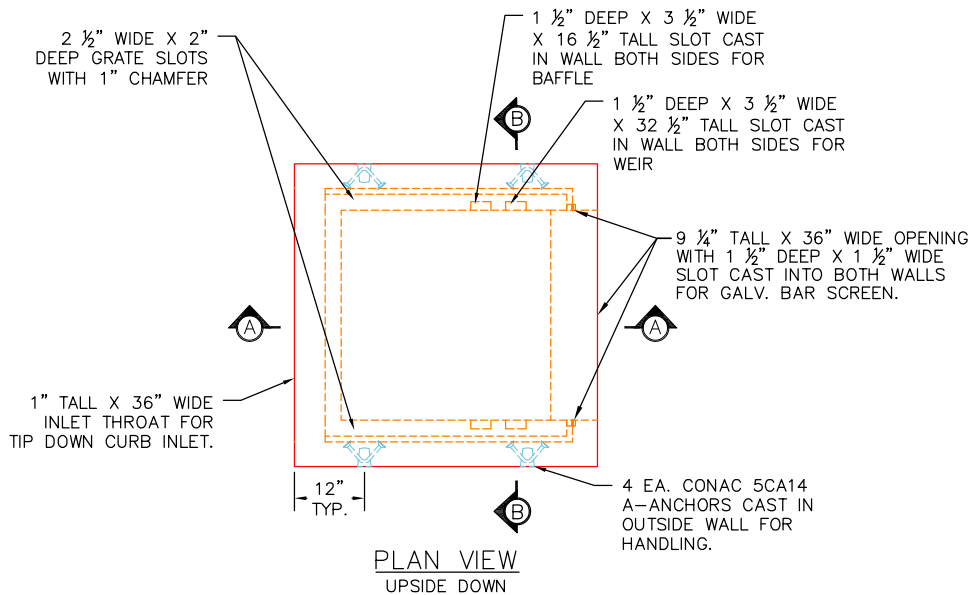

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615. (GRADE 60).
- WALLS/FLOOR (As. 12) #5 BAR @ 12" C.C.E.W.
2" MIN. CLEARANCE (TYP)
4. WEIGHTS: TOTAL = 3,924 LBS
5. 41" X 41" X 1.25" GALV. BAR GRATE BY ICAST.
6. 1.25" X 7" X 39" GALV. BAR SCREEN BY ICAST.
7. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE

PRODUCTION WORK ORDER

PRODUCT I.D.: BX036036-08BAVF

DESCRIPTION: 36" X 36" X 34 1/2" BOX BASE



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING(S) CORRECT LOCATION.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: UPSIDE DOWN

CUSTOMER: CONVERGENT WATER TECHNOLOGIES

PLANT: BEAVER DAM, KY.

PROJECT: GALLATIN PRETX-LT

WEIGHT: 3,924 LBS.

STRUCTURE: QL1 ST-CB (1)

TOP SECTION JOINT: FLAT

ORDER NO: 26-2112

BASE SECTION JOINT: N/A

PC: C. GOFF

DRAWING: S. FELLETER

QC CHECK INITIALS:

DATE: 08/17/26

SCALE: NTS

PG. 1 of 1