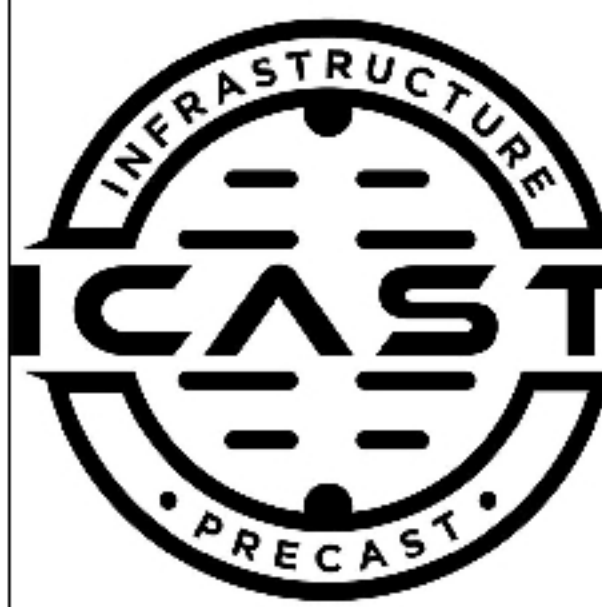


Job Name: 26-2119 512 W Kingston Ave MSD Job Location: Louisville, KY Contractor: TRC, LLC					Plant: Beaver Dam 7/16/2026 3:43:42 PM		Tech: S. Felletter PC: T. Lewis			
Structure ID: QL3 ST-CB 15										
P2		BX1818-06R18		BOX RISER 6inW F/F						
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW F/F - 18" P1) 18" x 18" - KNOCKOUT BASE 6"W/F - STOCK F/n - 24" 1) CASTING - HOE 165A F/G 2) 18" x 18" - Conseal CS-102 1.00"					0 lb 870 lb 1613 lb 138 lb 0 lb ----- Structure Total: 2621 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 165-A F/G). . REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 3.833'		Rim to Invert: 0'		Slack: 0"		Sump: 46"		Step Position:		
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions) (P3) (P2) << (P1) 18" + 18" + 0°-										

INSIDE WALL DIMENSIONS

Front

Right (18")

Back (18")

Left

(P2)

EXT

18"

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 6" Floor Height: 0"	Height (Int): 18" Height (Ext): 18"	Weight (Net): 870 lb Volume (Net): 0.22cu.yd
----------------------------------	--------------------------------	--	--	---