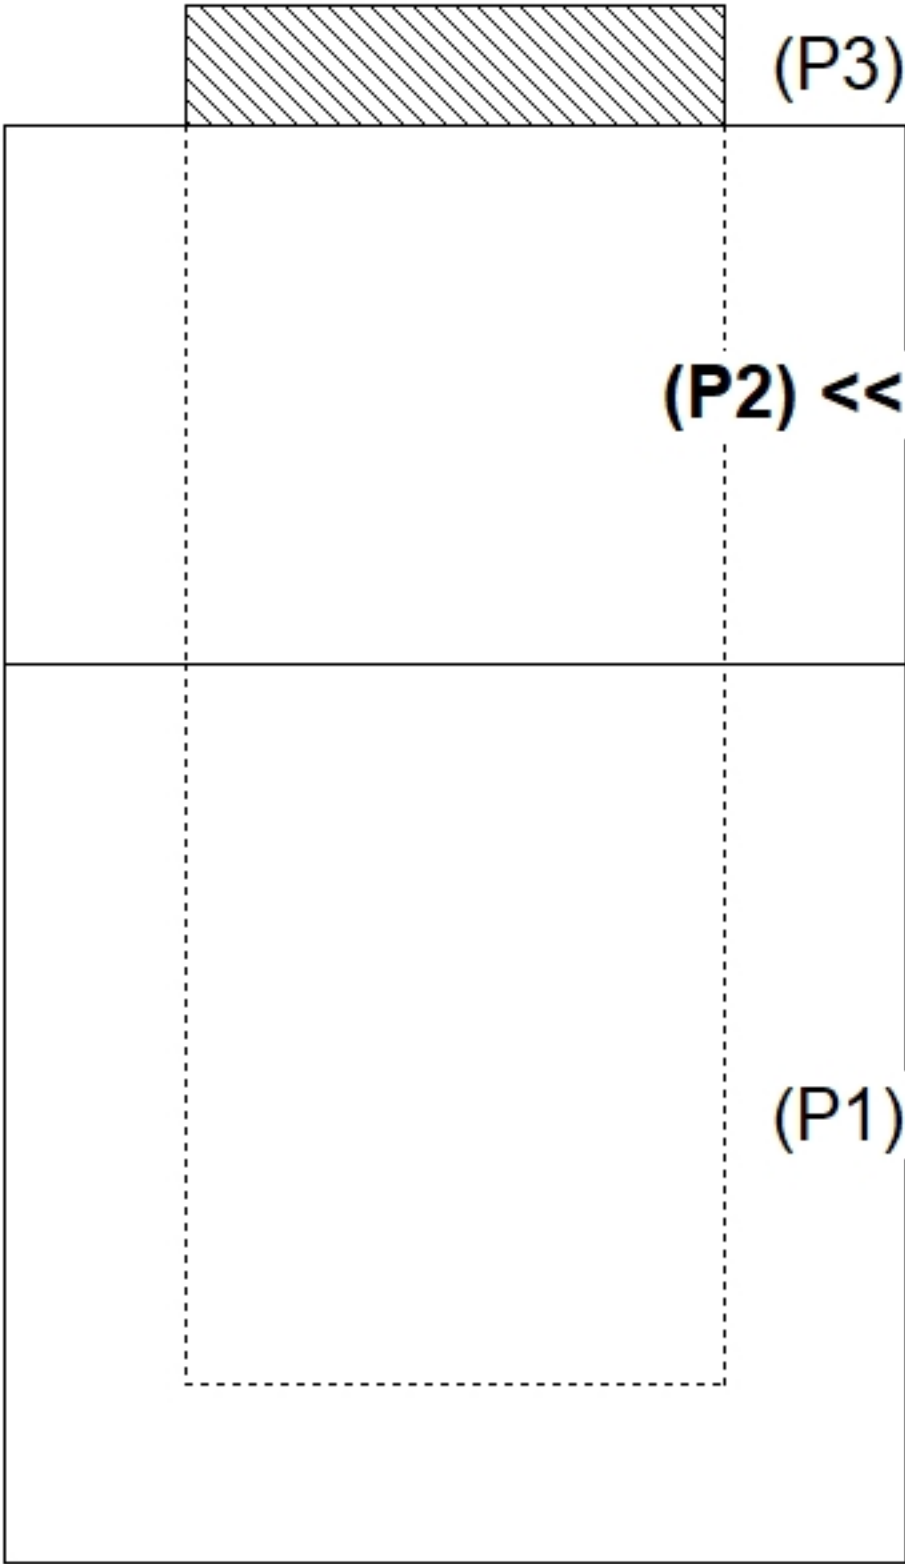
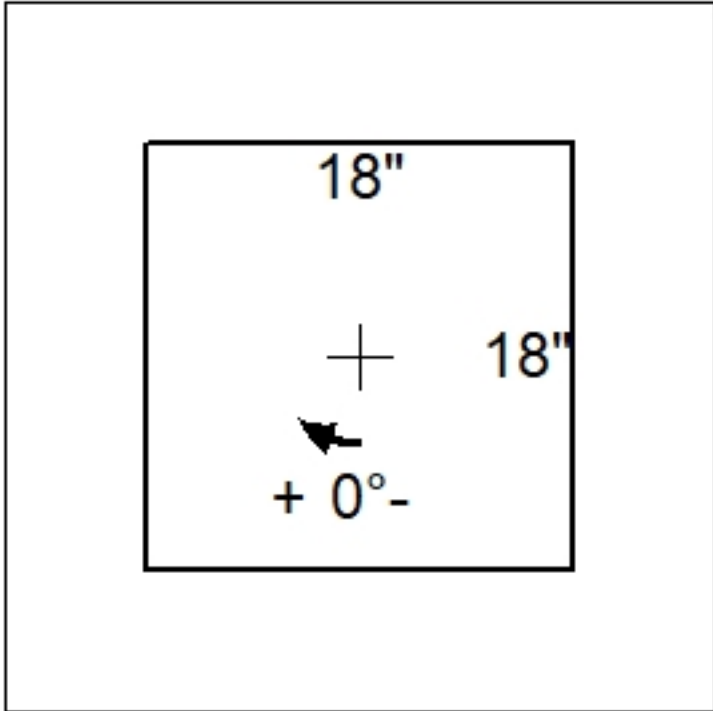
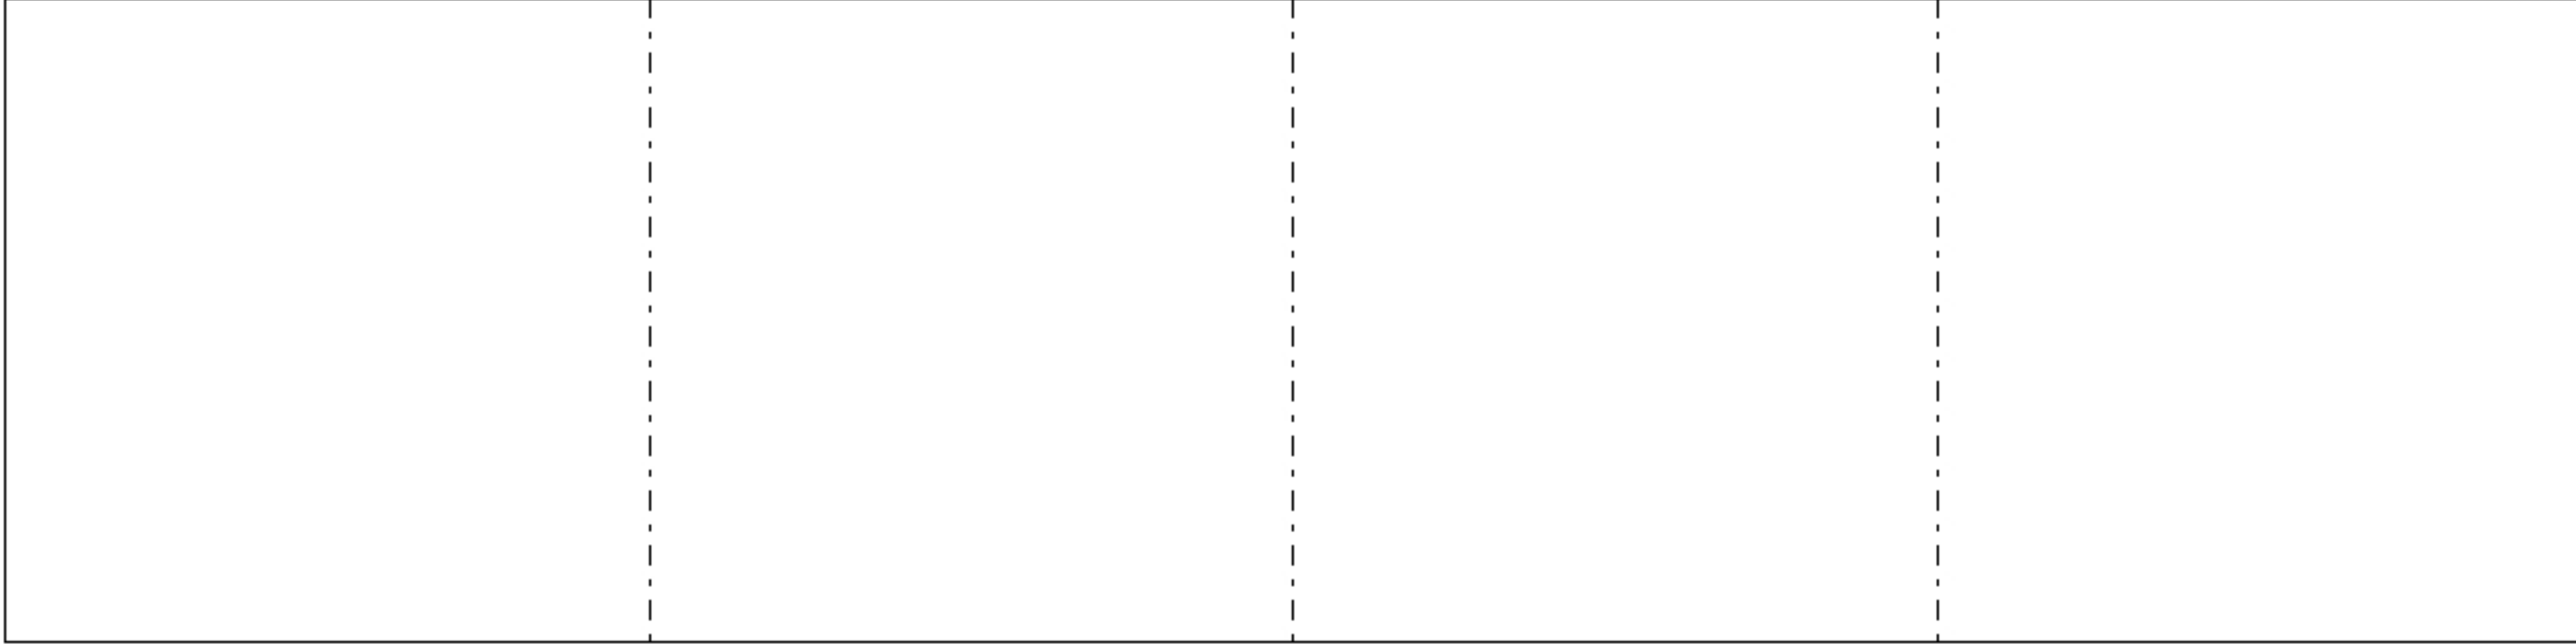


Job Name: 26-2119 512 W Kingston Ave MSD					Plant: Beaver Dam		Tech: S. Felletter					
Job Location: Louisville, KY					7/16/2026 3:43:39 PM		PC: T. Lewis					
Structure ID: QL3 ST-CB 8												
P2		BX1818-06R18			BOX RISER 6inW F/F							
P3) 18" x 18" - CASTING HEIGHT - 4" P2) 18" x 18" - BOX RISER 6inW F/F - 18" P1) 18" x 18" - KNOCKOUT BASE 6"W/F - STOCK F/n - 24" 1) CASTING - HOE 165A F/G 2) 18" x 18" - Conseal CS-102 1.00"						0 lb 870 lb 1613 lb 138 lb 0 lb ----- 2621 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 165-A F/G). . REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 3.833' Rim to Invert: 0' Slack: 0" Sump: 46" Step Position:												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
		INSIDE WALL DIMENSIONS										
(P2)		Front				Right (18")		Back (18")		Left		EXT 18"
												
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Flat		Wall Thickness: 6" Floor Height: 0"		Height (Int): 18" Height (Ext): 18"		Weight (Net): 870 lb Volume (Net): 0.22cu.yd		