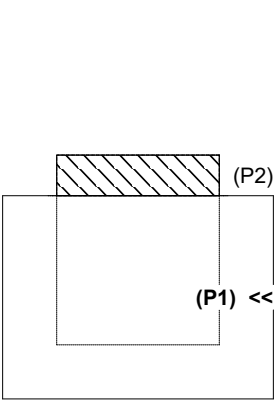
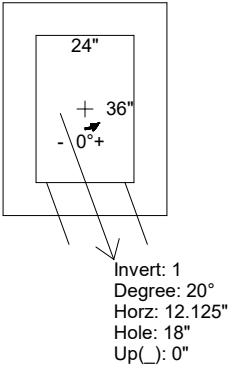
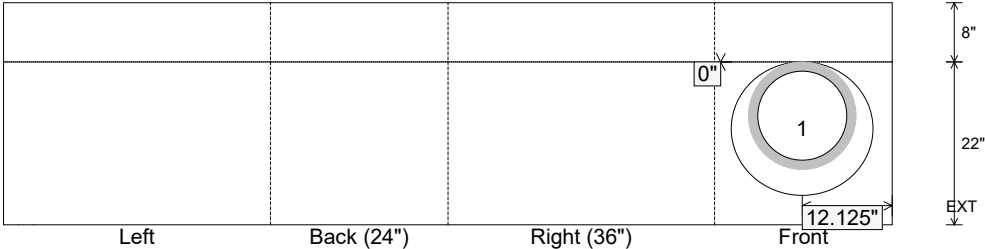


Job Name: 26-2139 - 4157 & 4143 Vincent Station Drive Job Location: Owensboro, KY Contractor: Winwater Hartford KY Co.				Plant: 100 5/29/2026 12:15:29 PM		Tech: Jared - F PC: A. Chambers					
Structure ID: CI 404.65											
P1 BX2436-08BVF				BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 22" 1) CASTING - HOE 525 SET FLAT GRATE (F/G/H) 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 18				0 lb 3459 lb 442 lb 0 lb 0 lb ----- 3901 lb Structure Total:		<u>Structure Notes:</u> 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 525 SET FLAT GRATE (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 406.9'				Rim to Invert: 2.25'		Slack: 0.25"		Sump: 1.25"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	404.65'	20°	23.125"	12" HDPE	14.5"	Hole 18	18"	19.155"	0"	-6"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions) 											
INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 22" Height (Ext): 30"		Weight (Net): 3459 lb Volume (Net): 0.88cu.yd		