



Job Name: 26-2139 - 4157 & 4143 Vincent Station Drive Job Location: Owensboro, KY Contractor: Winwater Hartford KY Co.				Plant: 100 5/29/2026 12:15:31 PM		Tech: Jared - F PC: A. Chambers					
Structure ID: DBI 404.15											
P1		BX3030-06BA24		BOX BASE 6inW, 6inF F/n							
P2) 30" x 30" - CASTING HEIGHT - 4" P1) 30" x 30" - BOX BASE 6inW, 6inF F/n - 24" 1) CASTING - HOE 468 F/G 1) 30" x 30" - Conseal CS-102 1.00" 1) Hole - 18				0 lb 2500 lb 489 lb 0 lb 0 lb ----- 2989 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 468 F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 406.4'				Rim to Invert: 2.25'		Slack: 0.248"		Sump: 1.248"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	404.15'	0°	21"	12" HDPE	14.5"	Hole 18	18"	18"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											




(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)




Invert: 1
Degree: 0°
Horz: 15"
Hole: 18"
Up(): 0"

UPSIDE-DOWN VIEW (int. dimensions)



Invert: 1
Degree: 0°
Horz: 15"
Hole: 18"
Up(): 0"

INSIDE WALL DIMENSIONS

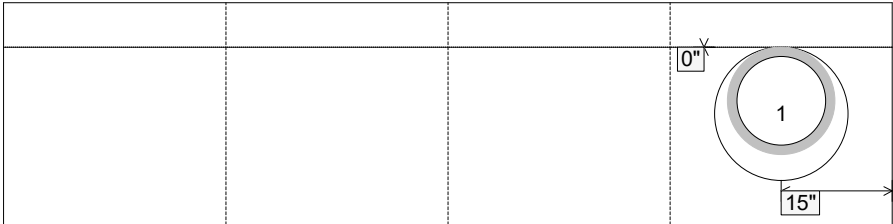

Left Back (30") Right (30") Front

15" 6" 24" EXT

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2500 lb Volume (Net): 0.64cu.yd
----------------------------------	-------------------------------	--	--	--